

Tel: 01856 876215 **Fax:** 01856 876199 **E-mail:** info@sjomand.co.uk

14 Victoria Street • Kirkwall • Orkney • KW15 1DN

www.sjomand.co.uk



Survey Report On

> Ballasquoy, Evie, Orkney, KW17 2PF.

Client:

Client address: Ballasquoy, Evie, Orkney, KW17 2PF.

Date of inspection: 11th March 2025.

Prepared by: Christopher Park, M.R.I.C.S.,

Chartered Surveyor,

R.I.C.S. Registered Valuer.

SERVICES INCLUDE:

Bank & Building Society Valuations

Residential & Commercial Property Surveys

> Single Surveys

Energy
Performance
Certificates

SAP Certifications

> Building Surveying Services

Rental & Insurance Valuations

Residential & Commercial Plans

> Title Deed Plans

Overseeing New Builds

Planning & Building Warrant Applications

A list of partners is available at the above address

LOCAL KNOWLEDGE ■ NATIONAL COVERAGE

Offices throughout Scotland

Each member firm of First Surveyors Scotland is an independent entity and no partnership implies or otherwise exists between the firms by reason of their membership of First Surveyors Scotland. First Surveyors Scotland is the trading name of First Surveyors Scotland Limited a company registered in Scotland Company No 201050. Registered Office: 57 Albany Street, Edinburgh, EH1 3QY





1. INFORMATION AND SCOPE OF INSPECTION

This section tells you about the type, accommodation, neighbourhood, age and construction of the property. It also tells you about the extent of the inspection and highlights anything that the surveyor could not inspect.

All references to visual inspection refer to an inspection from within the property without the need to move any obstructions and externally from ground level within the site and adjoining public areas. Any references to left or right are taken facing the front of the property.

The inspection is carried out without causing damage to the building or its contents and without endangering the occupiers or the surveyor. Heavy furniture, stored items and insulation are not moved. Unless identified in the report the surveyor will assume that no harmful or hazardous materials or techniques have been used in the construction. The presence or possible consequences of any site contamination will not be researched.

Services such as TV/cable connection, internet connection, swimming pools and other leisure facilities etc. were not inspected or reported on.

Description	Detached single storey property with detached garage.	
Accommodation	Sun Room, Sitting Room, Hallway, Kitchen, Shower Room and Two Bedrooms.	
Gross external floor area (m²)	115m².	
Neighbourhood and location	Situated in a rural location in the parish of Evie.	
Age	c.1800's with sun room extension at a later date. Exact dates are not known.	
Weather	Overcast with rain showers.	
Chimney stacks	Visually inspected with the aid of binoculars where appropriate.	
	Three stone chimney stacks, rendered, with coping and one pot to each. Visible leadwork where passing through the roof.	

Roofing including roof space

Sloping roofs were visually inspected with the aid of binoculars where appropriate.

Roof spaces were visually inspected and were entered where there was safe and reasonable access, normally defined as being from a 3m ladder within the property. If this is not possible, then physical access to the roof space may be taken by other means if the Surveyor deems it safe and reasonable to do so.

Main pitched roof clad fibre cement slate (may contain asbestos) on felt, timber sarking boards and rafters. Fibreglass insulation laid between and over ceiling joists, limiting inspection access to "head & shoulders" from the hatches.

Sun room pitched roof clad fibre cement slate (may contain asbestos) on timber sarking boards and trusses. No inspection access to sun room roof space or timbers due to location of ground source heat pump internal unit restricting hatch access.

Rainwater fittings

Visually inspected with the aid of binoculars where appropriate.

P.V.C gutters and downpipes.

Main walls

Visually inspected with the aid of binoculars where appropriate. Foundations and concealed parts were not exposed or inspected.

Stone walls, pointed to front elevation, with external insulation fitted to left gable and rear elevation c.2019, limiting inspection access.

Sun room stone walls finished pointed to lower gable and front elevations, timber boarding to upper front elevation, P.V.C panels to upper gable elevation and external insulation to rear wall c.2019, limiting inspection access.

Windows, external doors and joinery

External doors were opened and closed where keys were available.

Random windows were opened and closed where possible. Doors and windows were not forced open.

u.P.V.C double glazed windows and external doors. Single glazed timber window between sitting room and sun room.

Double glazed Velux windows to kitchen and hallway.

External decorations

Visually inspected.

Paint finish to external joinery.

Conservatories / porches

Visually inspected.

None.

Communal areas

Visually inspected.

None.

Garages and permanent outbuildings

Visually inspected.

Detached stone garage with pitched roof clad corrugated fibre cement sheeting (may contain asbestos), concrete floor, electric vehicle door, single glazed timber window and double glazed u.P.V.C door.

Ruinous stone store to left gable.

Detached basic stone outbuilding to front with pitched roof clad corrugated fibre cement sheeting (may contain asbestos).

Outside areas and boundaries

Visually inspected.

As per Seller, site area extends to approximately 2.4 acres – this should be confirmed.

Concrete and paved pathways with stone chipped parking area.

There is a cattle grid to driveway entrance.

Agricultural style post and wire boundary fencing, where inspected. It should be noted not all boundaries were inspected due to site area.

Ceilings

Visually inspected from floor level.

Ceilings are lined either plasterboard or timber panelling.

Internal walls

Visually inspected from floor level.

Using a moisture meter, walls were randomly tested for dampness where considered appropriate.

Internal walls and partitions are either lined plasterboard, finished exposed stone or hardwall plaster.

As per Seller, main front external wall was internally insulated c.2019.

Floors including sub floors

Surfaces of exposed floors were visually inspected. No carpets or floor coverings were lifted.

Sub-floor areas were inspected only to the extent visible from a readily accessible and unfixed hatch by way of an inverted "head and shoulders" inspection at the access point.

Solid floors.

Internal joinery and kitchen fittings

Built-in cupboards were looked into but no stored items were moved.

Kitchen units were visually inspected excluding appliances.

Timber panelled internal doors.

u.P.V.C double glazed door between sitting room and sun room.

Timber facings and skirtings.

Built in kitchen units.

Chimney breasts and fireplaces

Visually inspected. No testing of the flues or fittings was carried out

Exposed stone chimney breast to sitting room. No open fireplaces.

Internal decorations

Visually inspected.

Ceilings are finished either emulsion, papered or painted timber panelling.

Walls are finished either emulsion or papered.

Paint or varnish finish to internal joinery.

Cellars

Visually inspected.

None.

Electricity

Accessible parts of the wiring were visually inspected without removing fittings. No tests whatsoever were carried out to the system or appliances. Visual inspection does not assess any services to make sure they work properly and efficiently and meet modern standards. If any services are turned off, the surveyor will state that in the report and will not turn them on.

Mains electricity supply.

Electric vehicle charging point in garage.

Gas

Visually inspected.

No mains gas in Orkney.

Water, plumbing and bathroom fittings

Visual inspection of the accessible pipework, water tanks, cylinders and fittings without removing any insulation.

No tests whatsoever were carried out to the system or appliances.

Mains water supply.

Shower Room – mixer shower cubicle, wash hand basin and W.C.

Stainless steel kitchen sink with drainer.

Outside tap.

Heating and hot water

Accessible parts of the system were visually inspected apart from communal systems, which were not inspected.

No tests whatsoever were carried out to the system or appliances.

Ground source heat pump to radiator central heating system.

Solid fuel stove to sitting room.

Heated towel rail to shower room.

Insulated hot water cylinder in shower room.

Drainage

Drainage covers etc were not lifted.

Neither drains nor drainage systems were tested.

Private septic tank – location should be confirmed.

Fire, smoke and burglar alarms

Visually inspected.

No tests whatsoever were carried out to the system or appliances.

Smoke detectors to hallways.

Carbon monoxide alarm to sitting room.

IMPORTANT NOTE: Fire Safety Legislation effective from February 2022 requires a smoke alarm to be installed in the room most frequently used for living purposes and in every circulation space on each floor. A heat detecting alarm must be installed in every kitchen area and all smoke and heat alarms must be ceiling mounted and interlinked. Where there is a carbon-fuelled appliance e.g. central heating boiler, open fire, wood burning stove etc, a carbon monoxide detector is also required. The purchaser(s) should appraise themselves of the requirements of this legislation and engage with appropriately accredited contractors to ensure compliance.

Any additional limits to inspection:


There was no access for inspection to the foundations, to behind side wall linings or to the underside of the main floor construction. The property was fully furnished at the time of inspection. Fitted coverings prevented access to the floor surfaces. Fibreglass insulation laid between and over ceiling joists to the main roof spaces, limiting inspection access to "head & shoulders" from the hatches. No inspection access to sun room roof space or timbers due to location of ground source heat pump internal unit restricting access to the hatch. External insulation fitted to a number of walls. Not all boundaries were inspected due to site area. The condition or efficiency of the heating and drainage systems cannot be commented upon.

Tests by the Health Protection Agency have identified some properties in Orkney as having natural levels of Radon Gas in excess of those normally considered acceptable. Further advice on this should be obtained from the Health Protection Agency. Telephone 01235 822745/876/737.

An inspection for Japanese Knotweed or other invasive plant species was not carried out and unless otherwise stated, for the purposes of this report, it is assumed that there is no Japanese Knotweed or other invasive plant species within the boundaries of the property or in neighbouring properties.

It is out with the scope of this inspection to determine whether or not asbestos based products are present within the property. Asbestos was widely used in the building industry until around 1999, when it became a banned substance. If you have any concerns you should engage the services of a qualified asbestos surveyor.

Sectional diagram showing elements of a typical house

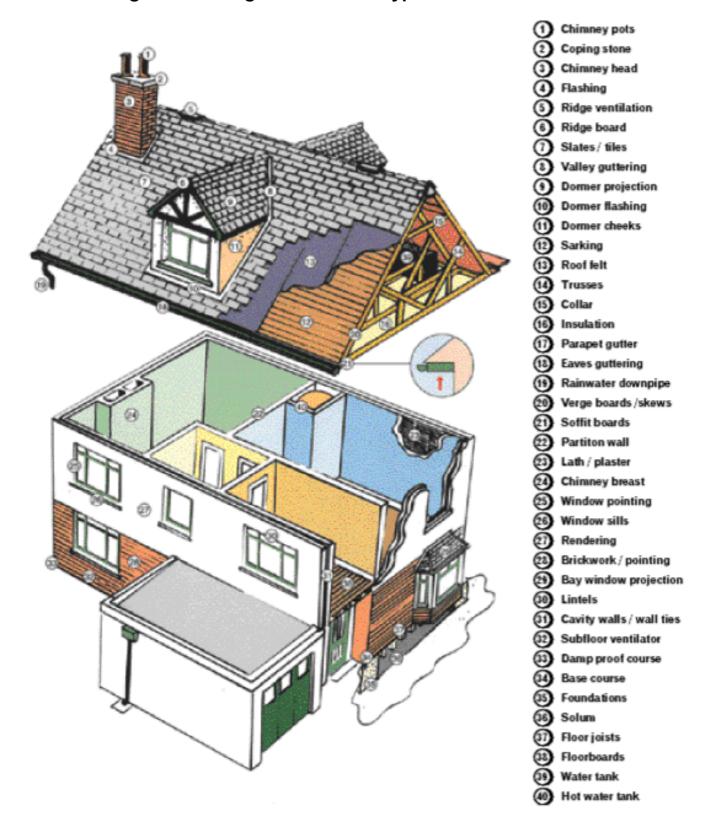

Reference may be made in this report to some or all of the above component parts of the property. This diagram may assist you in locating and understanding these terms.

2. CONDITION

This section identifies problems and tells you about the urgency of any repairs by using one of three categories.

Category 3: Urgent repairs or replacement are needed now. Failure to deal with them may cause problems to other parts of the property or cause a safety hazard. Estimates for repairs or replacement are needed now.	Category 2: Repairs or replacement requiring future attention, but estimates are still advised.	Category 1: No immediate action or repair is needed.
--	---	--

Structu	ral movement
Repair category	1
Notes:	There was no evidence of significant subsidence, settlement or
	cracking to the main walls.
	ess, rot and infestation
Repair category	2
Notes:	High moisture readings noted to the following, this is not an exhaustive list:- • Sun room external walls • Sitting room chimney breast • Hallway exposed stone wall • Middle bedroom window ingos • End bedroom window ingos • Main roof space timbers • Main roof space sarking Woodworm noted to the following, this is not an exhaustive list:- • Main roof space timbers and sarking • Exposed timber lintel in hallway
	 Garage roof timbers Wet rot noted to the following, this is not an exhaustive list:- Sun room front wall timber boarding Garage timber window
Chimne	ey stacks
Repair category:	1
Notes:	Hairline cracking to chimney stacks and copings. Chimney stacks and copings are weathered in appearance.

g including roof space
3
A number of slates are curling, broken, slipped or missing and require attention.
The fibre cement slates (may contain asbestos) are weathered in appearance and will require future replacement – an exact timescale
for this cannot be confirmed. Woodworm and high moisture readings as per "Dampness, rot and
infestation". Rodent bait and evidence of rodent activity to main roof space.
iter fittings
1
P.V.C gutters and downpipes are weathered in appearance.
alls
2
Boss (loose) and cracked render to sitting room window ingo.
The maintenance of the stone wall pointing will be an ongoing consideration.
Areas of discolouration to external wall insulation.
Inspection access was limited to rear and left gable external walls by
the presence of external wall insulation.
vs, external doors and joinery
2
Double glazing units appear to have failed to Velux windows and to a number of sun room windows.
Internal rubber seal is loose to middle bedroom window and to a number of sun room windows and external door.
Wet rot as per "Dampness, rot and infestation".
al decorations
2
Sun room timber boarding is weathered in appearance.
The maintenance of external decorations will be an ongoing consideration.
vatories / porches
•
N/A
unal areas
N/A

Garage	s and permanent outbuildings
Repair category:	3
Notes:	The detached stone outbuilding is in a state of disrepair. Woodworm and wet rot as per "Dampness, rot and infestation". General cracking to garage walls. Garage ridge tiles are weathered. The repair and maintenance of the outbuildings / garage will be an ongoing consideration.
Outside	e areas and boundaries
Repair category:	1
Notes:	No notable defects, where open to inspection. Not all boundaries inspected due to site area.
Ceiling	
Repair category:	2
Notes:	Slight bow noted to end bedroom ceiling – the reason for this is not known.
	Open joint to end bedroom ceiling panelling.
Interna	I walls
Repair category:	2
Notes:	High moisture readings as per "Dampness, rot and infestation". Hairline cracking to sun room.
Floors	including sub-floors
Repair category:	1
Notes:	Floors felt sound when walked upon.
Interna	joinery and kitchen fittings
Repair category:	1
Notes:	Woodworm as per "Dampness, rot and infestation".
Chimne	ey breasts and fireplaces
Repair category:	2
Notes:	High moisture readings as per "Dampness, rot and infestation". The condition or efficiency of the flue cannot be commented upon. It is recommeded the stove is cleaned and inspected by a suitably qualified person and any recommendations implemented prior to first use.

Interna	I decorations
Repair category:	2
Notes:	Condensation staining to Velux windows.
	Sun room ceiling would benefit from redecoration.
Cellars	
Repair category:	N/A
Notes:	
Electric	city
Repair category:	1
Notes:	The consumer unit is dated – as per sticker, next inspection recommended 6/3/30. The Institution of Engineering and Technology recommends that
	The Institution of Engineering and Technology recommends that inspections and testing are undertaken at least every ten years and on a change of occupancy. It should be appreciated that only the most recently constructed or re-wired properties will have installations which fully comply with IET regulations.
Gas	
Repair category:	N/A
Notes:	
Water,	plumbing and bathroom fittings
Repair category:	1
Notes:	No notable defects, where open to inspection.
Heating	and hot water
Repair category:	1
Notes:	The condition or efficiency of the heating system cannot be commented upon. The heating and hot water systems should be periodically tested by a qualified engineer, in accordance with the manufacturer's requirements, and any recommendations implemented.
Drainag	
Repair category:	1
Notes:	Location of septic tank should be confirmed. The condition or efficiency of the drainage system cannot be

commented upon.

Set out below is a summary of the condition of the property which is provided for reference only. You should refer to the comments above for detailed information.

Structural movement	1
Dampness, rot and infestation	2
Chimney stacks	1
Roofing including roof space	3
Rainwater fittings	1
Main walls	2
Windows, external doors and joinery	2
External decorations	2
Conservatories / porches	N/A
Communal areas	N/A
Garages and permanent outbuildings	3
Outside areas and boundaries	1
Ceilings	2
Internal walls	2
Floors including sub-floors	1
Internal joinery and kitchen fittings	1
Chimney breasts and fireplaces	2
Internal decorations	2
Cellars	N/A
Electricity	1
Gas	N/A
Water, plumbing and bathroom	1
fittings	
Heating and hot water	1
Drainage	1

Repair Categories			
Category 3: Urgent Repairs or replacement are needed now. Failure to deal with them may cause problems to other parts of the property or cause a safety hazard. Estimates for repairs or replacement are needed now.			
Category 2: Repairs or replacement requiring future attention, but estimates are still advised.			
Category 1: No immediate			

action or repair is

needed.

Remember

The cost of repairs may influence the amount someone is prepared to pay for the property. We recommend that relevant estimates and reports are obtained in your own name.

Warning

If left unattended, even for a relatively short period, Category 2 repairs can rapidly develop into more serious Category 3 repairs. The existence of Category 2 or Category 3 repairs may have an adverse effect on marketability, value and the sale price ultimately achieved for the property. This is particularly true during slow market conditions where the effect can be considerable.

3. ACCESSIBILITY INFORMATION

Guidance Notes on Accessibility Information

Three steps or fewer to a main entrance door of the property: In flatted developments the 'main entrance' would be the flat's own entrance door, not the external door to the communal stair. The 'three steps or fewer' are counted from external ground level to the flat's entrance door. Where a lift is present, the count is based on the number of steps climbed when using the lift.

<u>Unrestricted parking within 25 metres:</u> For this purpose, 'Unrestricted parking' includes parking available by means of a parking permit. Restricted parking includes: Parking that is subject to parking restrictions, as indicated by the presence of solid yellow, red or white lines at the edge of the road or by a parking control sign, parking meters or other coin-operated machines.

1. Which floor(s) is the living accommodation on?	Ground
2. Are there three steps or fewer to a main entrance door of the property?	Yes
3. Is there a lift to the main entrance door of the property?	No
4. Are all door openings greater than 750mm?	No
5. Is there a toilet on the same level as the living room and kitchen?	Yes
6. Is there a toilet on the same level as a bedroom?	Yes
7. Are all rooms on the same level with no internal steps or stairs?	Yes
8. Is there unrestricted parking within 25 metres of an entrance door to the building?	Yes

4. VALUATION AND CONVEYANCER ISSUES

This section highlights information that should be checked with a solicitor or licensed conveyancer. It also gives an opinion of market value and an estimated re-instatement cost for insurance purposes.

Matters for a solicitor or licensed conveyancer

Confirm:-

£435.000.

- 1. Site boundaries and ownership & maintenance responsibilities of boundaries
- 2. If woodworm treated and any guarantee obtained
- 3. Location of septic tank and if registered with SEPA
- 4. If any alterations or extensions requiring planning, building warrant or any other Local Authority Consents have been carried out, including the sun room extension & external wall insulation, the necessary approvals obtained and Completion Certificate issued

Where defects or repairs have been identified within this Home Report, regardless of whether reported as category 1, 2 or 3 (please read category definitions), it is always best practice to obtain detailed competitive estimates from reputable contractors or specialists prior to entering into any legally binding contract.

Estimated re-instatement cost for insurance purposes	

Valuation and market comments

Two Hundred and Ten Thousand Pounds, £210,000.

Report author: Christopher Park, M.R.I.C.S.,

Chartered Surveyor.

R.I.C.S. Registered Valuer.

Address: 14 Victoria Street,

Kirkwall, KW15 1DN.

Cal

Signed:

Date of report: 24th March 2025.

SINGLE SURVEY TERMS AND CONDITIONS (WITH MVR)

PART 1 - GENERAL

1.1 THE SURVEYORS

The Seller has engaged the Surveyors to provide the Single Survey Report and a generic Mortgage Valuation Report for Lending Purposes. The Seller has also engaged the Surveyors to provide an Energy Report in the format prescribed by the accredited Energy Company.

The Surveyors are authorised to provide a transcript or retype of the generic Mortgage Valuation Report on to Lender specific pro-forma. Transcript reports are commonly requested by Brokers and Lenders. The transcript report will be in the format required by the Lender but will contain the same information, inspection date and valuation figure as the generic Mortgage Valuation Report and the Single Survey. The Surveyors will decline any transcript request which requires the provision of information additional to the information in the Report and the generic Mortgage Valuation Report until the Seller has conditionally accepted an offer to purchase made in writing.

Once the Seller has conditionally accepted an offer to purchase made in writing, the Purchaser's lender or conveyancer may request that the Surveyors provide general comment on standard appropriate supplementary documentation. In the event of a significant amount of documentation being provided to the Surveyors, an additional fee may be incurred by the Purchaser. Any additional fee will be agreed in writing.

If information is provided to the Surveyors during the conveyancing process which materially affects the valuation stated in the Report and generic Mortgage Valuation Report, the Surveyors reserve the right to reconsider the valuation. Where the Surveyors require to amend the valuation in consequence of such information, they will issue an amended Report and generic Mortgage Valuation Report to the Seller. It is the responsibility of the Seller to ensure that the amended Report and generic Mortgage Valuation Report are transmitted to every prospective Purchaser.

The individual Surveyor will be a member of the Royal Institution of Chartered Surveyors who is competent to survey, value and report upon Residential Property. 1

If the Surveyors have had a previous business relationship within the past two years with the Seller or Seller's Agent or relative to the property, they will be obliged to indicate this by ticking the adjacent box.

The Surveyors have a written complaints handling procedure. This is available from the offices of the Surveyors at the address stated.

1.2 THE REPORT

The Surveyors will not provide an amended Report on the Property, except to correct factual inaccuracies.

The Report will identify the nature and source of information relied upon in its preparation

The Surveyor shall provide a Market Value of the Property, unless the condition of the Property is such that it would be inappropriate to do so. A final decision on whether a loan will be granted rests with the Lender who may impose retentions in line with their lending criteria. The date of condition and value of the property will be the date of inspection.

TERMS AND CONDITIONS – WITH MVR – SEPTEMBER 2009

¹ Which shall be in accordance with the current RICS Valuation Standards (the Red Book) and RICS Codes of Conduct

Prior to 1 December 2008, Purchasers have normally obtained their own report from their chosen Surveyor. By contrast, a Single Survey is instructed by the Seller and made available to all potential Purchasers in expectation that the successful Purchaser will have relied upon it. The Royal Institution of Chartered Surveyors rules require disclosure of any potential conflict of interest when acting for the Seller and the Purchaser in the same transaction. The Single Survey may give rise to a conflict of interest and if this is of concern to any party they are advised to seek their own independent advice.

The Report and any expressions or assessments in it are not intended as advice to the Seller or Purchaser or any other person in relation to an asking price or any other sales or marketing decisions.

The Report is based solely on the Property and is not to be relied upon in any manner whatsoever when considering the valuation or condition of any other property.

If certain minor matters are mentioned in the Report it should not be assumed that the Property is free of other minor defects.

Neither the whole nor any part of the Report may be published in any way, reproduced or distributed by any party other than the Seller, prospective purchasers and the Purchaser and their respective professional advisers without the prior written consent of the Surveyors.

1.3 LIABILITY

The Report is prepared with the skill and care reasonably to be expected of a competent residential surveyor who is a member of the Royal Institution of Chartered Surveyors.

The Report is addressed to the Seller and was prepared in the expectation that it (or a complete copy) along with these Terms and Conditions (or a complete copy) would (or, as the case might be, would have been) be disclosed and delivered to

- the Seller:
- any person(s) noting an interest in purchasing the Property from the Seller;
- any person(s) who make(s) (or on whose behalf is made) an offer to purchase the Property, whether or not that offer is accepted by the Seller;
- the Purchaser; and
- the professional advisers of any of these.

The Surveyors acknowledge that their duty of skill and care in relation to the Report is owed to the Seller and to the Purchaser. The Surveyors accept no responsibility or liability whatsoever in relation to the Report to persons other than the Seller and the Purchaser. The Seller and Purchaser should be aware that if a Lender seeks to rely on this Report they do so at their own risk. In particular, the Surveyors accept no responsibility or liability whatsoever to any Lender in relation to the Report. Any such Lender relies upon the Report entirely at their own risk.

1.4 GENERIC MORTGAGE VALUATION REPORT

The Surveyors undertake to the Seller that they will prepare a generic Mortgage Valuation Report, which will be issued along with the Single Survey. It is the responsibility of the Seller to ensure that the generic Mortgage Valuation Report is provided to every potential Purchaser.

1.5 TRANSCRIPT MORTGAGE VALUATION FOR LENDING PURPOSES

The Surveyors undertake that on being asked to do so by a prospective purchaser, or his/her professional advisor or Lender, they will prepare a Transcript Mortgage Valuation Report for Lending Purposes on terms and conditions to be agreed between the Surveyors and Lender and solely for the use of the Lender and upon which the Lender may rely. The decision as to

whether finance will be provided is entirely a matter for the Lender. The Transcript Mortgage Valuation Report will be prepared from information contained in the Report and the generic Mortgage Valuation Report. 2

1.6 INTELLECTUAL PROPERTY

All intellectual property rights whatsoever (including copyright) in and to the Report, excluding the headings and rubrics, are the exclusive property of the Surveyors and shall remain their exclusive property unless they assign the same to any other party in writing.

1.7 PAYMENT

The Surveyors are entitled to refrain from delivering the Report to anyone until the fee and other charges for it notified to the Seller have been paid.

Additional fees will be charged for subsequent inspections and Reports.

1.8 CANCELLATION

The Seller will be entitled to cancel the inspection by notifying the Surveyor's office at any time before the day of the inspection.

The Surveyor will be entitled not to proceed with the inspection (and will so report promptly to the Seller) if after arriving at the property, the Surveyor concludes that it is of a type of construction of which the Surveyor has insufficient specialist knowledge to be able to provide the inspection satisfactorily. The Surveyor will also be entitled not to proceed if after arriving at the property, the Surveyor concludes that the property is exempt under Part 3 of The Housing (Scotland) Act 2006 as detailed in the (Prescribed Documents) Regulations 2008. If there is a potential threat to their health or personal safety, the inspection may be postponed or cancelled, at the Surveyor's discretion.

In the case of cancellation or the inspection not proceeding, the Surveyor will refund any fees paid by the Seller for the inspection and Report, except for expenses reasonably incurred and any fee due in light of the final paragraph of this section.

In the case of cancellation by the Seller, for whatever reason, after the inspection has taken place but before a written report is issued, the Surveyor will be entitled to raise an invoice equivalent to 80% of the agreed fee.

1.9 PRECEDENCE

If there is any incompatibility between these Terms and Conditions and the Report, these Terms and Conditions take precedence.

1.10 **DEFINITIONS**

- the "Lender" is the party who has provided or intends or proposes to provide financial assistance to the Purchaser towards the purchase of the Property and in whose favour a standard security will be granted over the Property;
- the "Transcript Mortgage Valuation Report for Lending Purposes" means a separate report, prepared by the Surveyor, prepared from information in the Report and the generic Mortgage Valuation Report, but in a style and format required by the Lender. The Transcript Mortgage Valuation Report for Lending Purposes will be prepared with the skill and care reasonably to be expected from a surveyor who is a member of the Royal Institution of Chartered Surveyors and who is competent to survey, value and report on the Property;
- the "Generic Mortgage Valuation Report" means a separate report, prepared by the Surveyor from information in the Report but in the Surveyor's own format.
- the "Market Value" is The estimated amount for which a property should exchange on the date of valuation between a willing buyer and a willing seller in an arm's-length

transaction after proper marketing wherein the parties had each acted knowledgeably, prudently and without compulsion

- the "Property" is the property which forms the subject of the Report;
- the "Purchaser" is the person (or persons) who enters into a contract to buy the Property from the Seller;
- a "prospective Purchaser" is anyone considering buying the Property.
- the "Report" is the report, of the kind described in Part 2 of these Terms and Conditions and in the form set out in part 1 of Schedule 1 of the Housing (Scotland) Act 2006 (Prescribed Documents) Regulations 2008;
- the "Seller" is/are the proprietor(s) of the Property;
- the "Surveyor" is the author of the Report on the Property; and
- the "Surveyors" are the firm or company of which the Surveyor is an employee, director, member or partner (unless the Surveyor is not an employee, director, member or partner, when the "Surveyors" means the Surveyor) whose details are set out at the head of the Report.
- the "Energy Report" is the advice given by the accredited Energy Company, based on information collected by the Surveyor during the Inspection, and also includes an Energy Performance Certificate, in a Government approved format.

PART 2 – DESCRIPTION OF THE REPORT

2.1 THE SERVICE

The Single Survey is a Report by an independent Surveyor, prepared in an objective way regarding the condition and value of the Property on the day of the inspection, and who is a member of the Royal Institution of Chartered Surveyors. It includes an Energy Report as required by Statute and this is in the format of the accredited Energy Company. In addition, the Surveyor has agreed to supply a generic Mortgage Valuation Report.

2.2 THE INSPECTION

The Inspection is a general surface examination of those parts of the Property which are accessible: in other words, visible and readily available for examination from ground and floor levels, without risk of causing damage to the Property or injury to the Surveyor.

All references to visual inspection refer to an inspection from within the property at floor level and from ground level within the site and adjoining public areas, without the need to move any obstructions. Any references to left or right are taken facing the front of the property.

The Inspection is carried out with the Seller's permission, without causing damage to the building or contents. Furniture, stored items and insulation are not moved.

Unless identified in the report the Surveyor will assume that no harmful or hazardous materials have been used in the construction. The presence or possible consequences of any site contamination will not be researched.

The Surveyor will not carry out an asbestos inspection, and will not be acting as an asbestos inspector in completing a Single Survey of properties that may fall within the Control of Asbestos in the Workplace Regulations. In the case of flats it will be assumed that there is a

² Which shall be in accordance with the current RICS Valuation Standards (the Red Book) and RICS Rules of Conduct.

duty holder, as defined in the Regulations and that a Register of Asbestos and effective Management Plan is in place, which does not require any expenditure, or pose a significant risk to health. No enquiry of the duty holder will be made.

2.3 THE REPORT

The Report will be prepared by the Surveyor who carried out the property inspection and will describe various aspects of the property as defined by the headings of the Single Survey report with the comments being general and unbiased. The report on the location, style and condition of the property, will be concise and will be restricted to matters that could have a material effect upon value and will omit items that, in the Surveyor's opinion, are not significant. If certain minor matters are mentioned, it should not be interpreted that the property is free of any other minor defects.

Throughout the Report, the following repair categories will be used to give an overall opinion of the state of repair and condition of the property.

- 2.3.1 <u>Category 3</u>: Urgent repairs or replacement are needed now. Failure to deal with them may cause problems to other parts of the property or cause a safety hazard. Estimates for repairs or replacement are needed now.
- 2.3.2 <u>Category 2</u>: Repairs or replacement requiring future attention, but estimates are still advised.
- 2.3.3 <u>Category 1</u>: No immediate action or repair is needed.

WARNING: If left unattended, even for a relatively short period, Category 2 repairs can rapidly develop into more serious Category 3 repairs. The existence of Category 2 or Category 3 repairs may have an adverse effect on marketability, value and the sale price ultimately achieved for the property. This is particularly true during slow market conditions when the effect can be considerable.

Parts of the property, which cannot be seen or accessed, will not be reported upon and this will be stated. If the Surveyor suspects that a defect may exist within an unexposed area and which could have a material effect upon the value, he may recommend further investigation by specialist contractors.

2.4 SERVICES

Surveyors are not equipped or qualified to test the services and therefore no comment can be interpreted as implying that the design, installation and function of the services are in accordance/compliance with regulations, safety and efficiency expectations. However, comment is made where there is cause to suspect significant defects or shortcomings with the installations. No tests are made of any services or appliances.

2.5 ACCESSIBILITY

A section is included to help identify the basic information interested parties need to know to decide whether to view a property.

2.6 ENERGY REPORT

A section is included that makes provision for an Energy Report, relative to the property. The Surveyor will collect physical data from the property and provide such data in a format required by an accredited Energy Company. The Surveyor cannot of course accept liability for any advice given by the Energy Company.

2.7 VALUATION AND CONVEYANCER ISSUES

The last section of the Report contains matters considered relevant to the Conveyancer (Solicitor). It also contains the Surveyor's opinion both of the market value of the property and of the re-instatement cost, as defined below.

"Market Value" The estimated amount for which a property should exchange on the date of valuation between a willing buyer and a willing seller in an arm's-length transaction after proper marketing wherein the parties had each acted knowledgeably, prudently and without compulsion. In arriving at the opinion of the Market Value the Surveyor also makes various standard assumptions covering, for example, vacant possession; tenure and other legal considerations; contamination and hazardous materials; the condition of un-inspected parts; the right to use mains services; and the exclusion of curtains, carpets etc. from the valuation. In the case of flats, the following further assumptions are made that:

- There are rights of access and exit over all communal roadways, corridors, stairways etc. and to use communal grounds, parking areas, and other facilities;
- There are no particularly troublesome or unusual legal restrictions;
- ➤ There is no current dispute between the occupiers of the flats or any outstanding claims or losses; and the costs of repairs to the building are shared among the coproprietors on an equitable basis.

Any additional assumption, or any found not to apply, is reported.

"Re-instatement cost" is an estimate for insurance purposes of the current cost of rebuilding the Property in its present form unless otherwise stated. This includes the cost of rebuilding the garage and permanent outbuildings, site clearance and professional fees, but excludes VAT (except on the fees).

Sellers or prospective Purchasers may consider it prudent to instruct a reinspection and revaluation after a period of 12 weeks (or sooner if appropriate) to reflect changing circumstances in the market and/or in the physical condition of the Property



Tel: 01856 876215 **Fax:** 01856 876199 **E-mail:** info@sjomand.co.uk

14 Victoria Street • Kirkwall • Orkney • KW15 1DN

www.sjomand.co.uk

SERVICES INCLUDE:

Bank & Building Society Valuations

Residential & Commercial Property Surveys

> Single Surveys

Energy Performance Certificates

SAP Certifications

> Building Surveying Services

Rental & Insurance Valuations

Residential & Commercial Plans

> Title Deed Plans

Overseeing New Builds

Planning & Building Warrant Applications

Generic Mortgage Valuation

Property Address - Ballasquoy,

Evie, Orkney, KW17 2PF.

Seller's Name -

Lending Institution - To be confirmed if applicable.

Date of Inspection - 11th March 2025.

<u>Important Note</u>: This form of valuation is carried out only to the instructions of and for the purposes of lending institutions to assist them in determining what advance if any may be made on the security of the property. Other forms of valuation or survey are available for prospective purchasers on which they can rely for their interest. A description of the type of valuation undertaken is provided on Page 2.

A list of partners is available at the above address

LOCAL KNOWLEDGE ■ NATIONAL COVERAGE

Offices throughout Scotland

Each member firm of First Surveyors Scotland is an independent entity and no partnership implies or otherwise exists between the firms by reason of their membership of First Surveyors Scotland. First Surveyors Scotland is the trading name of First Surveyors Scotland Limited a company registered in Scotland Company No 201050. Registered Office: 57 Albany Street, Edinburgh, EH1 3QY





GENERIC MORTGAGE VALUATION

Involving a restricted form of Inspection and Report Purpose: To establish a value of the property for Mortgage purposes only.

INCLUSIONS EXCLUSIONS

Main Building - External Main Building - External

To the extent that they are visible from ground level - roof coverings, chimneys, parapets, gutters, walls, windows, doors, pipes, wood or metal work, paintwork, damp proof courses and airbricks.

Any parts not readily accessible or visible including foundations and drains.

Main Building - Internal

Ceilings, walls and other load bearers, floor surfaces (except where covered) to the extent necessary to establish their apparent condition.

The valuer is not expected to enter into the roof space unless alerted to a fundamental defect.

Cellars, if reasonably accessible, to the extent necessary to establish condition.

Any parts not readily accessible or visible.

Decorations generally and sanitary and kitchenware, limited throughout to the identification of significant visible

Under-floor voids.

Main Building - Internal

Services Services

Means of soil and waste disposal, (main) gas, (main) electricity, (main) water, extent and type of central heating/hot water supply.

defects only.

Determination of age, efficiency or condition of installations unless obviously

Suitability or otherwise for any particular purpose.

(i) dangerous.

(ii) substantially defective.

(Note: Testing of the services listed opposite is excluded)

Outbuildings - External Outbuildings - External

Garages and other buildings of substantial permanent construction; any structure attached to the dwelling.

All other structures and leisure facilities of every description.

Boundary Structures Boundary Structures

Site boundary fences, walls and structures to the extent necessary to establish their apparent stability.

Any disrepair that would not significantly affect the value of the security. Drives, paths and gates.

- **I-** This mortgage valuation has been undertaken in accordance with the R.I.C.S. Valuation Standards, Global and UK, as Amended.
- **II** The Mortgage Valuation is provided for lending purposes and for the sole use of the named Lender. It is confidential to the Lender, the applicant and his professional advisers and the Valuer accepts no responsibility whatsoever to any other person.
- III It is assumed that there is a valid title to the subjects free of any onerous encumbrances.
- **IV** A building survey has not been carried out nor have those parts of the property that are covered, unexposed or inaccessible been inspected. Such parts have been assumed to be in good repair and condition. It is not possible to express an opinion or give advice upon the condition of uninspected parts and therefore this Mortgage Valuation should not be taken as making any implied representation or statement about such parts.
- **V** An investigation has not been carried out to determine whether or not any deleterious or hazardous material has been used in the construction of this property, or has since been incorporated, and it is therefore not possible to state that the property is free from risk in this respect. For the purpose of this Mortgage Valuation it has been assumed that such investigation would not disclose the presence of any such material to any significant extent.
- **VI** No enquiries have been made concerning contamination affecting the property or neighbouring properties that would affect the valuation. However should it be established subsequently that contamination exists at the property or on any neighbouring land, or that the premises have been or are being put to any contaminative use, this might reduce the opinion of value provided.

Description -

Detached single storey property with detached garage.

Accommodation -

Sun Room, Sitting Room, Hallway, Kitchen, Shower Room and Two Bedrooms.

Gross external floor area (m²) -

115m².

Neighbourhood and location -

Situated in a rural location in the parish of Evie.

Age -

c.1800's with sun room extension at a later date.

Exact dates are not known.

Tenure -

Absolute Ownership.

Construction

Chimney stacks -

Three stone chimney stacks, rendered, with coping and one pot to each.

Visible leadwork where passing through the roof.

Roofing including roof space -

Main pitched roof clad fibre cement slate (may contain asbestos) on felt, timber sarking boards and rafters. Fibreglass insulation laid between and over ceiling joists, limiting inspection access to "head & shoulders" from the hatches.

Sun room pitched roof clad fibre cement slate (may contain asbestos) on timber sarking boards and trusses. No inspection access to sun room roof space or timbers due to location of ground source heat pump internal unit restricting hatch access.

Rainwater fittings – Main walls – P.V.C gutters and downpipes.

Stone walls, pointed to front elevation, with external insulation fitted to left gable and rear elevation c.2019, limiting inspection access.

Sun room stone walls finished pointed to lower gable and front elevations, timber boarding to upper front elevation, P.V.C panels to upper gable elevation and external insulation to rear wall c.2019, limiting inspection access.

Windows and doors -

u.P.V.C double glazed windows and external doors.

Single glazed timber window between sitting room and

sun room.

Double glazed Velux windows to kitchen and hallway. Ceilings are lined either plasterboard or timber panelling.

Internal walls and partitions are either lined plasterboard, finished exposed stone or hardwall plaster.

As per Seller, main front external wall was internally

insulated c.2019.

Solid floors.

Ground source heat pump to radiator central heating system.

Solid fuel stove to sitting room.

Floors -Heating -

Interior -

Services -

Condition -

Comments -

Mains water and electricity.

Private septic tank – location should be confirmed.

Garages & Outbuildings -

Detached stone garage with pitched roof clad corrugated fibre cement sheeting (may contain asbestos), concrete floor, electric vehicle door, single glazed timber window and double glazed u.P.V.C door.

Ruinous stone store to left gable.

Detached basic stone outbuilding to front with pitched roof clad corrugated fibre cement sheeting (may contain asbestos).

Where open to general inspection the property is in satisfactory condition.

The subjects are a suitable security for mortgage purposes.

Confirm:-

- 1. Site boundaries and ownership & maintenance responsibilities of boundaries
- 2. If woodworm treated and any guarantee obtained
- 3. Location of septic tank and if registered with SEPA
- 4. If any alterations or extensions requiring planning, building warrant or any other Local Authority Consents have been carried out, including the sun room extension & external wall insulation, the necessary approvals obtained and Completion Certificate issued

Reinstatement Value for Insurance Purposes –

£435,000.

Market Value -

Two Hundred and Ten Thousand Pounds, £210,000.

Signature of Surveyor,

Christopher Park, M.R.I.C.S, Chartered Surveyor, RICS Registered Valuer.

Energy Performance Certificate (EPC)

Dwellings

Scotland

BALLASQUOY, ARWICK ROAD, EVIE, ORKNEY, KW17 2PF

Dwelling type: Detached bungalow
Date of assessment: 11 March 2025
Date of certificate: 24 March 2025

Total floor area: 72 m²

Primary Energy Indicator: 199 kWh/m²/year

Reference number: 9293-1016-3207-2515-2204 **Type of assessment:** RdSAP, existing dwelling

Approved Organisation: Elmhurst

Main heating and fuel: Ground source heat pump,


radiators, electric

You can use this document to:

- Compare current ratings of properties to see which are more energy efficient and environmentally friendly
- Find out how to save energy and money and also reduce CO₂ emissions by improving your home

Estimated energy costs for your home for 3 years*	£3,414	See your recommendations
Over 3 years you could save*	£864	report for more information

* based upon the cost of energy for heating, hot water, lighting and ventilation, calculated using standard assumptions




Energy Efficiency Rating

This graph shows the current efficiency of your home, taking into account both energy efficiency and fuel costs. The higher this rating, the lower your fuel bills are likely to be.

Your current rating is **band C (72)**. The average rating for EPCs in Scotland is **band D (61)**.

The potential rating shows the effect of undertaking all of the improvement measures listed within your recommendations report.



Environmental Impact (CO₂) Rating

This graph shows the effect of your home on the environment in terms of carbon dioxide (CO_2) emissions. The higher the rating, the less impact it has on the environment.

Your current rating is **band C (75)**. The average rating for EPCs in Scotland is **band D (59)**.

The potential rating shows the effect of undertaking all of the improvement measures listed within your recommendations report.

Top actions you can take to save money and make your home more efficient

Recommended measures	Indicative cost	Typical savings over 3 years
1 Internal or external wall insulation	£4,000 - £14,000	£234.00
2 Floor insulation (solid floor)	£4,000 - £6,000	£312.00
3 Solar water heating	£4,000 - £6,000	£318.00

A full list of recommended improvement measures for your home, together with more information on potential cost and savings and advice to help you carry out improvements can be found in your recommendations report.

To find out more about the recommended measures and other actions you could take today to stop wasting energy and money, visit greenerscotland.org or contact Home Energy Scotland on 0808 808 2282.

THIS PAGE IS THE ENERGY PERFORMANCE CERTIFICATE WHICH MUST BE AFFIXED TO THE DWELLING AND NOT BE REMOVED UNLESS IT IS REPLACED WITH AN UPDATED CERTIFICATE

Summary of the energy performance related features of this home

This table sets out the results of the survey which lists the current energy-related features of this home. Each element is assessed by the national calculation methodology; 1 star = very poor (least efficient), 2 stars = poor, 3 stars = average, 4 stars = good and 5 stars = very good (most efficient). The assessment does not take into consideration the condition of an element and how well it is working. 'Assumed' means that the insulation could not be inspected and an assumption has been made in the methodology, based on age and type of construction.

Element	Description	Energy Efficiency	Environmental
Walls	Sandstone or limestone, with external insulation Sandstone or limestone, with internal insulation Sandstone or limestone, as built, no insulation (assumed)	**** **** ***	**** **** ***
Roof	Pitched, 150 mm loft insulation	★★★★ ☆	★★★ ☆
Floor	Solid, no insulation (assumed)	_	_
Windows	Fully double glazed	★★★☆☆	★★★☆☆
Main heating	Ground source heat pump, radiators, electric	****	****
Main heating controls	Programmer, TRVs and bypass	★★★☆☆	★★★☆☆
Secondary heating	Room heaters, dual fuel (mineral and wood)	_	_
Hot water	From main system	★★★☆☆	★★★ ☆
Lighting	Low energy lighting in all fixed outlets	****	****

The energy efficiency rating of your home

Your Energy Efficiency Rating is calculated using the standard UK methodology, RdSAP. This calculates energy used for heating, hot water, lighting and ventilation and then applies fuel costs to that energy use to give an overall rating for your home. The rating is given on a scale of 1 to 100. Other than the cost of fuel for electrical appliances and for cooking, a building with a rating of 100 would cost almost nothing to run.

As we all use our homes in different ways, the energy rating is calculated using standard occupancy assumptions which may be different from the way you use it. The rating also uses national weather information to allow comparison between buildings in different parts of Scotland. However, to make information more relevant to your home, local weather data is used to calculate your energy use, CO₂ emissions, running costs and the savings possible from making improvements.

The impact of your home on the environment

One of the biggest contributors to global warming is carbon dioxide. The energy we use for heating, lighting and power in our homes produces over a quarter of the UK's carbon dioxide emissions. Different fuels produce different amounts of carbon dioxide for every kilowatt hour (kWh) of energy used. The Environmental Impact Rating of your home is calculated by applying these 'carbon factors' for the fuels you use to your overall energy use.

The calculated emissions for your home are 34 kg CO₂/m²/yr.

The average Scottish household produces about 6 tonnes of carbon dioxide every year. Based on this assessment, heating and lighting this home currently produces approximately 2.4 tonnes of carbon dioxide every year. Adopting recommendations in this report can reduce emissions and protect the environment. If you were to install all of these recommendations this could reduce emissions by 3.3 tonnes per year. You could reduce emissions even more by switching to renewable energy sources.

Estimated energy costs for this home

	Current energy costs	Potential energy costs	Potential future savings
Heating	£2,139 over 3 years	£1,596 over 3 years	
Hot water	£1,044 over 3 years	£723 over 3 years	You could
Lighting	£231 over 3 years	£231 over 3 years	save £864
Totals	£3,414	£2,550	over 3 years


These figures show how much the average household would spend in this property for heating, lighting and hot water. This excludes energy use for running appliances such as TVs, computers and cookers, and the benefits of any electricity generated by this home (for example, from photovoltaic panels). The potential savings in energy costs show the effect of undertaking all of the recommended measures listed below.

Recommendations for improvement

The measures below will improve the energy and environmental performance of this dwelling. The performance ratings after improvements listed below are cumulative; that is, they assume the improvements have been installed in the order that they appear in the table. Further information about the recommended measures and other simple actions to take today to save money is available from the Home Energy Scotland hotline which can be contacted on 0808 808 2282. Before carrying out work, make sure that the appropriate permissions are obtained, where necessary. This may include permission from a landlord (if you are a tenant) or the need to get a Building Warrant for certain types of work.

Recommended measures		Indicative cost	Typical saving	Rating after improvement		
		indicative cost	per year	Energy	Environment	
1 Internal or e	external wall insulation	£4,000 - £14,000	£78	C 74	C 77	
2 Floor insula	tion (solid floor)	£4,000 - £6,000	£104	C 77	C 79	
3 Solar water	heating	£4,000 - £6,000	£106	C 80	B 82	
4 Solar photo	voltaic panels, 2.5 kWp	£3,500 - £5,500	£394	B 91	A 92	
5 Wind turbin	e	£15,000 - £25,000	£865	A 115	A 113	

Choosing the right improvement package





About the recommended measures to improve your home's performance rating

This section offers additional information and advice on the recommended improvement measures for your home

1 Internal or external wall insulation

Internal or external wall insulation involves adding a layer of insulation to either the inside or the outside surface of the external walls, which reduces heat loss and lowers fuel bills. As it is more expensive than cavity wall insulation it is only recommended for walls without a cavity, or where for technical reasons a cavity cannot be filled. Internal insulation, known as dry-lining, is where a layer of insulation is fixed to the inside surface of external walls; this type of insulation is best applied when rooms require redecorating. External solid wall insulation is the application of an insulant and a weather-protective finish to the outside of the wall. This may improve the look of the home, particularly where existing brickwork or rendering is poor, and will provide long-lasting weather protection. Further information can be obtained from the National Insulation Association (www.nationalinsulationassociation.org.uk). It should be noted that a building warrant is required for the installation of external wall insulation. Planning permission may also be required and that building regulations apply to external insulation so it is best to check with your local authority on both issues.

2 Floor insulation (solid floor)

Insulation of a floor will significantly reduce heat loss; this will improve levels of comfort, reduce energy use and lower fuel bills. Insulating solid floors can present challenges; insulation laid on top of existing solid floors may impact on existing doors and finishes whilst lifting of a solid floor to insert insulation below will require consideration of the potential effect on both structural stability and damp proofing. It is advised to seek advice from a Chartered Structural Engineer or a registered Architect about this if unsure. Further information about floor insulation is available from many sources including www.energysavingtrust.org.uk/scotland/Insulation/Floor-insulation. Building regulations generally apply to this work and may also require a building warrant so it is best to check with your local authority building standards department.

3 Solar water heating

A solar water heating panel, usually fixed to the roof, uses the sun to pre-heat the hot water supply. This can significantly reduce the demand on the heating system to provide hot water and hence save fuel and money. Planning permission might be required, building regulations generally apply to this work and a building warrant may be required, so it is best to check these with your local authority. You could be eligible for Renewable Heat Incentive payments which could appreciably increase the savings beyond those shown on your EPC, provided that both the product and the installer are certified by the Microgeneration Certification Scheme (or equivalent). Details of local MCS installers are available at www.microgenerationcertification.org.

4 Solar photovoltaic (PV) panels

A solar PV system is one which converts light directly into electricity via panels placed on the roof with no waste and no emissions. This electricity is used throughout the home in the same way as the electricity purchased from an energy supplier. Planning permission might be required, building regulations generally apply to this work and a building warrant may be required, so it is best to check with your local authority. The assessment does not include the effect of any Feed-in Tariff which could appreciably increase the savings that are shown on this EPC for solar photovoltaic panels, provided that both the product and the installer are certified by the Microgeneration Certification Scheme (or equivalent). Details of local MCS installers are available at www.microgenerationcertification.org.

5 Wind turbine

A wind turbine provides electricity from wind energy. This electricity is used throughout the home in the same way as the electricity purchased from an energy supplier. Wind turbines are not suitable for all properties. The system's effectiveness depends on local wind speeds and the presence of nearby obstructions, and a site survey should be undertaken by an accredited installer. Planning permission might be required and building regulations generally apply to this work and a building warrant may be required, so it is best to check these with your local authority. The assessment does not include the effect of any Feed-in Tariff which could appreciably increase the savings that are shown on this EPC for a wind turbine, provided that both the product and the installer are certified by the Microgeneration Certification Scheme (or equivalent). Details of local MCS installers are available at www.microgenerationcertification.org.

Low and zero carbon energy sources

Low and zero carbon (LZC) energy sources are sources of energy that release either very little or no carbon dioxide into the atmosphere when they are used. Installing these sources may help reduce energy bills as well as cutting carbon.

LZC energy sources present:

Ground source heat pump

Your home's heat demand

In this section, you can see how much energy you might need to heat your home and provide hot water. These are estimates showing how an average household uses energy. These estimates may not reflect your actual energy use, which could be higher or lower. You might spend more money on heating and hot water if your house is less energy efficient. The table below shows the potential benefit of having your loft and walls insulated. Visit https://energysavingtrust.org.uk/energy-at-home for more information.

Heat demand	Existing dwelling	Impact of loft insulation	Impact of cavity wall insulation	Impact of solid wall insulation
Space heating (kWh per year)	11,896	(450)	N/A	(1,185)
Water heating (kWh per year)	2,729			_

Addendum

This dwelling has stone walls and may be exposed to wind driven rain and so requires further investigation to establish whether these walls are of cavity construction and to determine which type of wall insulation is best suited.

About this document

This Recommendations Report and the accompanying Energy Performance Certificate are valid for a maximum of ten years. These documents cease to be valid where superseded by a more recent assessment of the same building carried out by a member of an Approved Organisation.

The Energy Performance Certificate and this Recommendations Report for this building were produced following an energy assessment undertaken by an assessor accredited by Elmhurst (www.elmhurstenergy.co.uk), an Approved Organisation Appointed by Scottish Ministers. The certificate has been produced under the Energy Performance of Buildings (Scotland) Regulations 2008 from data lodged to the Scottish EPC register. You can verify the validity of this document by visiting www.scottishepcregister.org.uk and entering the report reference number (RRN) printed at the top of this page.

Assessor's name: Mr. Christopher Park

Assessor membership number: EES/021836
Company name/trading name: S J Omand
Address: 14 Victoria Street
Orkney

Kirkwall KW15 1DW 01856 876215

Phone number: KW15 1DW 91856 876215

Email address: chris.park@sjomand.co.uk

Related party disclosure: No related party

If you have any concerns regarding the content of this report or the service provided by your assessor you should in the first instance raise these matters with your assessor and with the Approved Organisation to which they belong. All Approved Organisations are required to publish their complaints and disciplinary procedures and details can be found online at the web address given above.

Use of this energy performance information

Once lodged by your EPC assessor, this Energy Performance Certificate and Recommendations Report are available to view online at www.scottishepcregister.org.uk, with the facility to search for any single record by entering the property address. This gives everyone access to any current, valid EPC except where a property has a Green Deal Plan, in which case the report reference number (RRN) must first be provided. The energy performance data in these documents, together with other building information gathered during the assessment is held on the Scottish EPC Register and is available to authorised recipients, including organisations delivering energy efficiency and carbon reduction initiatives on behalf of the Scottish and UK governments. A range of data from all assessments undertaken in Scotland is also published periodically by the Scottish Government. Further information on these matters and on Energy Performance Certificates in general, can be found at www.gov.scot/epc.

Advice and support to improve this property

There is support available, which could help you carry out some of the improvements recommended for this property on page 3 and stop wasting energy and money. For more information, visit greeners cotland.org or contact Home Energy Scotland on 0808 808 2282.

Home Energy Scotland's independent and expert advisors can offer free and impartial advice on all aspects of energy efficiency, renewable energy and more.

HOMEENERGYSCOTLAND.ORG
0808 808 2282
FUNDED BY THE SCOTTISH GOVERNMENT



Property address	BALLASQUOY EVIE ORKNEY KWI7 2PF
Seller(s)	
Completion date of property questionnaire	28/2/25

Note for sellers

- Please complete this form carefully. It is important that your answers are correct.
- The information in your answers will help ensure that the sale of your house goes smoothly. Please answer each question with as much detailed information as you can.
- If anything changes after you fill in this questionnaire but before the date of entry for the sale of your house, tell your solicitor or estate agent immediately.

Information to be given to prospective buyer(s)

1.	Length of ownership	
	Control Bridge Control	*(' '_'
	How long have you owned the property? $6\frac{1}{2}$ 46ARS	
2.	Council tax	
	Which Council Tax band is your property in? (Please circle)	
	A B C D E F G H	
3.	Parking	
	What are the arrangements for parking at your property?	
	(Please tick all that apply)	, ,
	• Garage	
	Allocated parking space	
	• Driveway	
	Shared parking	
	On street	
!	Resident permit	
1	Metered parking	
	Other (please specify):	
4.	Conservation area	
	Is your property in a designated Conservation Area (that is an area of special architectural or historical interest, the character or appearance of which it is desirable to preserve or enhance)?	Yes/No/ Don't know
		,

5.	Listed buildings	
	Is your property a Listed Building, or contained within one (that is a building recognised and approved as being of special architectural or historical interest)?	Yes/No
6.	Alterations/additions/extensions	president and the second
a.	(i) During your time in the property, have you carried out any structural alterations, additions or extensions (for example, provision of an extra bath/shower room, toilet, or bedroom)?	Yes/No
	If you have answered yes, please describe below the changes which you have made:	
	3	
	(ii) Did you obtain planning permission, building warrant, completion certificate and other consents for this work?	Yes/No
	If you have answered yes, the relevant documents will be needed by the purchaser and you should give them to your solicitor as soon as possible for checking.	
	If you do not have the documents yourself, please note below who has these documents and your solicitor or estate agent will arrange to obtain them:	
b.	Have you had replacement windows, doors, patio doors or double glazing installed in your property?	Yes/No YES
	If you have answered yes, please answer the three questions below:	100
	(i) Were the replacements the same shape and type as the ones you replaced?	Yes/No NO
	(ii) Did this work involve any changes to the window or door openings?	Yes/No
	(iii) Please describe the changes made to the windows doors, or patio door approximate dates when the work was completed): Back spulls table d with single modern door; main entrance door replaced with me door; tall mont window replaced with glan door. Approx Aug Please give any guarantees which you received for this work to your solicingent.	ors (with oor replaced oden front oust 2019, itor or estate

7.	Central heating	
a.	Is there a central heating system in your property? (Note: a partial central heating system is one which does not heat all the main rooms of the property — the main living room, the bedroom(s), the hall and the bathroom). If you have answered yes or partial — what kind of central heating is there? (Examples: gas-fired, solid fuel, electric storage heating, gas warm air). If you have answered yes, please answer the three questions below:	Yes/No/ Partial 465
	i) When was your central heating system or partial central heating system installed?	DEC 2019
	(ii) Do you have a maintenance contract for the central heating system?	Yes/No
	If you have answered yes, please give details of the company with which you have a maintenance contract: Installed by Steven Paterson - I ask them to service the system every year. Last service feb 2025	NO .
8.	(iii) When was your maintenance agreement last renewed? AH (Please provide the month and year). Energy Performance Certificate	
	Does your property have an Energy Performance Certificate which is less than 10 years old?	(Yes) No
9.	Issues that may have affected your property	
а.	Has there been any storm, flood, fire or other structural damage to your	Yes/No
	property while you have owned it?	NO
	If you have answered yes, is the damage the subject of any outstanding insurance claim?	Yes/No
b.	Are you aware of the existence of asbestos in your property?	Yes/No
	If you have answered yes, please give details:	No

Services	Connected	Supplier	
Gas or liquid petroleum gas			ola, sudaderida
Water mains or private water supply	✓ ·	SCOTTISH WATER	
Electricity	17	OCTOPUS	0.17
Mains drainage	for	Tie grants i	
Telephone	/	PLUSNET	
Cable TV or satellite			
Cable TV or satellite Broadband	✓ /	PLUSNET	
	at your property?		Yes/No
Broadband		PLUSNET	
Broadband there a septic tank system you have answered yes, ple	ease answer the tw	PLUSNET	Yes/No Yes/No Don't kno
Broadband there a septic tank system you have answered yes, ple Do you have appropriate cank?	ease answer the two	PLUSNET o questions below: charge from your septic	Yes/No Yes/No Don't kno
Broadband there a septic tank system you have answered yes, ple Do you have appropriate cank?	ease answer the two	PLUSNET o questions below: charge from your septic	Yes/No/ Yes/No/ Yes/No
Broadband there a septic tank system you have answered yes, ple Do you have appropriate cank?	ease answer the two	PLUSNET o questions below: charge from your septic	Yes/No Yes/No Don't kno
Broadband there a septic tank system you have answered yes, ple Do you have appropriate cank? Do you have a maintenance you have answered yes, ple	ease answer the two	PLUSNET o questions below: charge from your septic	Yes/No/ Yes/No/ Yes/No

11.	Responsibilities for shared or common areas	
a.	Are you aware of any responsibility to contribute to the cost of anything used jointly, such as the repair of a shared drive, private road, boundary, or garden area? If you have answered yes, please give details:	Yes/No/ Don't know N⊖
b.	Is there a responsibility to contribute to repair and maintenance of the roof, common stairwell or other common areas? If you have answered yes, please give details:	Yes/No/ Not applicable
c.	Has there been any major repair or replacement of any part of the roof during the time you have owned the property?	Yes/No
d.	Do you have the right to walk over any of your neighbours' property — for example to put out your rubbish bin or to maintain your boundaries? If you have answered yes, please give details:	Yes/No NO
e.	As far as you are aware, do any of your neighbours have the right to walk over your property, for example to put out their rubbish bin or to maintain their boundaries? If you have answered yes, please give details:	Yes/No NO
f.	As far as you are aware, is there a public right of way across any part of your property? (public right of way is a way over which the public has a right to pass, whether or not the land is privately-owned.) If you have answered yes, please give details:	Yes/No NO
12.	Charges associated with your property	
a.	Is there a factor or property manager for your property? If you have answered yes, please provide the name and address, and give details of any deposit held and approximate charges:	Yes/No No

b.	Is there a common buildings insurance policy? If you have answered yes, is the cost of the insurance included in your monthly/annual factor's charges? Please give details of any other charges you have to pay on a regulupkeep of common areas or repair works, for example to a resider maintenance or stair fund.	
	maintenance or stair fund.	21102
13.	Specialist works	
a.	As far as you are aware, has treatment of dry rot, wet rot, damp or any other specialist work ever been carried out to your property?	Yes/No
	If you have answered yes, please say what the repairs were for, whether you carried out the repairs (and when) or if they were done before you bought the property.	ET SABER OZIT
b.	As far as you are aware, has any preventative work for dry rot, wet rot, or damp ever been carried out to your property? If you have answered yes, please give details:	Yes/No
	e sa desta esta esta Milla esta esta. Esta esta esta esta esta esta esta esta e	
C.	If you have answered yes to 13(a) or (b), do you have any guarantees relating to this work? If you have answered yes, these guarantees will be needed by the purchaser and should be given to your solicitor as soon as possible for checking. If you do not have them yourself please write below who has these documents and your solicitor or estate agent will arrange for them to be obtained. You will also need to provide a description of the work carried out. This may be shown in the original estimate. Guarantees are held by:	Yes/No

	Guarantees					
a.	Are there any guarantees or warrant	ies for any	of the follo	wing:		
(i)	Electrical work	No	Yes	Don't know	With title deeds	Lost
(ii)	Roofing	No	Yes	Don't know	With title deeds	Lost
(iii)	Central heating	No	Yes	Don't know	With title deeds	Lost
(iv)	National House Building Council (NHBC)	(No)	Yes	Don't know	With title deeds	Lost
(v)	Damp course	No	Yes	Don't know	With title deeds	Lost
(vi)	Any other work or installations? (for example, cavity wall insulation, underpinning, indemnity policy)	No	Yes	Don't know	With title deeds	Lost
b. c.	If you have answered 'yes' or 'with t installations to which the guarantee INSULATION COVERED MAY 20 Are there any outstanding claims un	(s) relate(s): 19 – MAY	2044.	AL+EXTE	RNAL W	Yes/No
	If you have answered yes, please give	e details:				
						100
15.	Boundaries					100
15.	Boundaries So far as you are aware, has any bollast 10 years? If you have answered yes, please given		our proper	ty been mo	ved in the	Yes/ No/ Don't know

Date:

16.	Notices that affect your property			
	In the past three years have you ever received a notice:			
a.	advising that the owner of a neighbouring property has made a planning application?	Yes/No		
b.	that affects your property in some other way?	Yes/No		
		NO		
C.	that requires you to do any maintenance, repairs or improvements to your	Yes/No		
	property?	NO		
	If you have answered yes to any of a-c above, please give the notices to your solicitor or estate agent, including any notices which arrive at any time before the date of entry of the purchaser of your property.			

Declaration by	y the seller(s)/or other a	uthorised body or	person(s)	
I/We confirm t and belief.	that the information in th	is form is true an	d correct to the best of my/	our knowledge
Signature(s) .		·		
Date:	28/2/25	,	<u> </u>	