

Home Report

shepherd.co.uk







Contents

- 1. Scottish Single Survey
- 2. Energy Performance Certificate
- 3. Property Questionnaire



Scottish
Single Survey



survey report on:

Property address	24 Wingate Crescent East Kilbride Glasgow G74 3JA
Customer	EUAN DUNN
Customer address	24 Wingate Crescent East Kilbride Glasgow G74 3JA
Prepared by	Shepherd Chartered Surveyors
Date of inspection	11/03/2025



www.shepherd.co.uk

PART 1 - GENERAL

1.1 THE SURVEYORS

The Seller has engaged the Surveyors to provide the Single Survey Report and a generic Mortgage Valuation Report for Lending Purposes. The Seller has also engaged the Surveyors to provide an Energy Report in the format prescribed by the accredited Energy Company.

The Surveyors are authorised to provide a transcript or retype of the generic Mortgage Valuation Report on to Lender specific pro-forma. Transcript reports are commonly requested by Brokers and Lenders. The transcript report will be in the format required by the Lender but will contain the same information, inspection date and valuation figure as the generic Mortgage Valuation Report and the Single Survey. The Surveyors will decline any transcript request which requires the provision of information additional to the information in the Report and the generic Mortgage Valuation Report until the Seller has conditionally accepted an offer to purchase made in writing.

Once the Seller has conditionally accepted an offer to purchase made in writing, the Purchaser's lender or conveyancer may request that the Surveyors provide general comment on standard appropriate supplementary documentation. In the event of a significant amount of documentation being provided to the Surveyors, an additional fee may be incurred by the Purchaser. Any additional fee will be agreed in writing.

If information is provided to the Surveyors during the conveyancing process which materially affects the valuation stated in the Report and generic Mortgage Valuation Report, the Surveyors reserve the right to reconsider the valuation. Where the Surveyors require to amend the valuation in consequence of such information, they will issue an amended Report and generic Mortgage Valuation Report to the Seller. It is the responsibility of the Seller to ensure that the amended Report and generic Mortgage Valuation Report are transmitted to every prospective Purchaser.

The individual Surveyor will be a member of the Royal Institution of Chartered Surveyors who is competent to survey, value and report upon Residential Property¹.

If the Surveyors have had a previous business relationship within the past two years with the Seller or Seller's Agent or relative to the property, they will be obliged to indicate this by marking the adjacent box.



The Surveyors have a written complaints handling procedure. This is available from the offices of the Surveyors at the address stated.

1.2 THE REPORT

The Surveyors will not provide an amended Report on the Property, except to correct factual inaccuracies.

The Report will identify the nature and source of information relied upon in its preparation.

The Surveyor shall provide a Market Value of the Property, unless the condition of the Property is such that it would be inappropriate to do so. A final decision on whether a loan will be granted rests with the Lender who may impose retentions in line with their lending criteria. The date of condition and value of the property will be the date of inspection.

Prior to 1 December 2008, Purchasers have normally obtained their own report from their chosen Surveyor. By contrast, a Single Survey is instructed by the Seller and made available to all potential Purchasers in expectation that the successful Purchaser will have relied upon it. The Royal Institution of Chartered Surveyors rules require disclosure of any potential conflict of interest when acting for the Seller and the Purchaser in the same transaction. The Single Survey may give rise to a conflict of interest and if this is of concern to any party they are advised to seek their own independent advice.

The Report and any expressions or assessments in it are not intended as advice to the Seller or Purchaser or any other person in relation to an asking price or any other sales or marketing decisions.

¹ Which shall be in accordance with the current RICS Valuation Standards (The Red Book) and RICS Rules of Conduct.

The Report is based solely on the Property and is not to be relied upon in any manner whatsoever when considering the valuation or condition of any other property.

If certain minor matters are mentioned in the Report it should not be assumed that the Property is free of other minor defects.

Neither the whole nor any part of the Report may be published in any way, reproduced or distributed by any party other than the Seller, prospective purchasers and the Purchaser and their respective professional advisers without the prior written consent of the Surveyors.

1.3 LIABILITY

The Report is prepared with the skill and care reasonably to be expected of a competent residential surveyor who is a member of the Royal Institution of Chartered Surveyors.

The Report is addressed to the Seller and was prepared in the expectation that it (or a complete copy) along with these Terms and Conditions (or a complete copy) would (or, as the case might be, would have been) be disclosed and delivered to:

- the Seller:
- any person(s) noting an interest in purchasing the Property from the Seller;
- any person(s) who make(s) (or on whose behalf is made) an offer to purchase the Property, whether
 or not that offer is accepted by the Seller;
- the Purchaser; and
- the professional advisers of any of these.

The Surveyors acknowledge that their duty of skill and care in relation to the Report is owed to the Seller and to the Purchaser. The Surveyors accept no responsibility or liability whatsoever in relation to the Report to persons other than the Seller and the Purchaser. The Seller and Purchaser should be aware that if a Lender seeks to rely on this Report they do so at their own risk. In particular, the Surveyors accept no responsibility or liability whatsoever to any Lender in relation to the Report. Any such Lender relies upon the Report entirely at their own risk.

1.4 GENERIC MORTGAGE VALUATION REPORT

The Surveyors undertake to the Seller that they will prepare a generic Mortgage Valuation Report, which will be issued along with the Single Survey. It is the responsibility of the Seller to ensure that the generic Mortgage Valuation Report is provided to every potential Purchaser.

1.5 TRANSCRIPT MORTGAGE VALUATION FOR LENDING PURPOSES

The Surveyors undertake that on being asked to do so by a prospective purchaser, or his/her professional advisor or Lender, they will prepare a Transcript Mortgage Valuation Report for Lending Purposes on terms and conditions to be agreed between the Surveyors and Lender and solely for the use of the Lender and upon which the Lender may rely. The decision as to whether finance will be provided is entirely a matter for the Lender. The Transcript Mortgage Valuation Report will be prepared from information contained in the Report and the generic Mortgage Valuation Report².

1.6 INTELLECTUAL PROPERTY

All intellectual property rights whatsoever (including copyright) in and to the Report, excluding the headings and rubrics, are the exclusive property of the Surveyors and shall remain their exclusive property unless

² Which shall be in accordance with the current RICS Valuation Standards (The Red Book) and RICS Rules of Conduct.

they assign the same to any other party in writing.

1.7 PAYMENT

The Surveyors are entitled to refrain from delivering the Report to anyone until the fee and other charges for it notified to the Seller have been paid. Additional fees will be charged for subsequent inspections and Reports.

1.8 CANCELLATION

The Seller will be entitled to cancel the inspection by notifying the Surveyor's office at any time before the day of the inspection.

The Surveyor will be entitled not to proceed with the inspection (and will so report promptly to the Seller) if after arriving at the property, the Surveyor concludes that it is of a type of construction of which the Surveyor has insufficient specialist knowledge to be able to provide the inspection satisfactorily. The Surveyor will also be entitled not to proceed if after arriving at the property, the surveyor concludes that the property is exempt under Part 3 of The Housing (Scotland) Act 2006 as detailed in the (Prescribed Documents) Regulations 2008. If there is a potential threat to their health or personal safety, the inspection may be postponed or cancelled, at the Surveyor's discretion.

In the case of cancellation or the inspection not proceeding, the Surveyor will refund any fees paid by the Seller for the inspection and Report, except for expenses reasonably incurred and any fee due in light of the final paragraph of this section.

In the case of cancellation by the Seller, for whatever reason, after the inspection has taken place but before a written report is issued, the Surveyor will be entitled to raise an invoice equivalent to 80% of the agreed fee.

1.9 PRECEDENCE

If there is any incompatibility between these Terms and Conditions and the Report, these Terms and Conditions take precedence.

1.10 DEFINITIONS

- the "Lender" is the party who has provided or intends or proposes to provide financial assistance to the Purchaser towards the purchase of the Property and in whose favour a standard security will be granted over the Property;
- the "Transcript Mortgage Valuation Report for Lending Purposes" means a separate report, prepared by the Surveyor, prepared from information in the Report and the generic Mortgage Valuation Report, but in a style and format required by the Lender. The Transcript Mortgage Valuation Report for Lending Purposes will be prepared with the skill and care reasonably to be expected from a surveyor who is a member of the Royal Institution of Chartered Surveyors and who is competent to survey, value and report on the Property;
- the "Generic Mortgage Valuation Report" means a separate report, prepared by the Surveyor from information in the Report but in the Surveyor's own format;
- the "Market Value" is the estimated amount for which a property should exchange on the date of valuation between a willing buyer and a willing seller in an arm's-length transaction after proper marketing wherein the parties had each acted knowledgeably, prudently and without compulsion;
- the "Property" is the property which forms the subject of the Report;
- the "Purchaser" is the person (or persons) who enters into a contract to buy the Property from the Seller;

- a "prospective Purchaser" is anyone considering buying the Property;
- the "Report" is the report, of the kind described in Part 2 of these Terms and Conditions and in the form set out in part 1 of Schedule 1 of the Housing (Scotland) Act 2006 (Prescribed Documents) Regulations 2008;
- the "Seller" is/are the proprietor(s) of the Property;
- the "Surveyor" is the author of the Report on the Property; and
- the "Surveyors" are the firm or company of which the Surveyor is an employee, director, member or partner (unless the Surveyor is not an employee, director, member or partner, when the "Surveyors" means the Surveyor) whose details are set out at the head of the Report.
- the "Energy Report" is the advice given by the accredited Energy Company, based on information collected by the Surveyor during the Inspection, and also includes an Energy Performance Certificate, in a Government approved format.

PART 2 - DESCRIPTION OF THE REPORT

2.1 THE SERVICE

The Single Survey is a Report by an independent Surveyor, prepared in an objective way regarding the condition and value of the Property on the day of the inspection, and who is a member of the Royal Institution of Chartered Surveyors. It includes an Energy Report as required by Statute and this is in the format of the accredited Energy Company. In addition, the Surveyor has agreed to supply a generic Mortgage Valuation Report.

2.2 THE INSPECTION

The Inspection is a general surface examination of those parts of the Property which are accessible: in other words, visible and readily available for examination from ground and floor levels, without risk of causing damage to the Property or injury to the Surveyor.

All references to visual inspection refer to an inspection from within the property at floor level and from ground level within the site and adjoining public areas, without the need to move any obstructions. Any references to left or right are taken facing the front of the property.

The Inspection is carried out with the Seller's permission, without causing damage to the building or contents. Furniture, stored items and insulation are not moved.

Unless identified in the report the Surveyor will assume that no harmful or hazardous materials have been used in the construction. The presence or possible consequences of any site contamination will not be researched.

The Surveyor will not carry out an asbestos inspection, and will not be acting as an asbestos inspector in completing a Single Survey of properties that may fall within the Control of Asbestos in the Workplace Regulations. In the case of flats it will be assumed that there is a duty holder, as defined in the Regulations and that a Register of Asbestos and effective Management Plan is in place, which does not require any expenditure, or pose a significant risk to health. No enquiry of the duty holder will be made.

2.3 THE REPORT

The Report will be prepared by the Surveyor who carried out the property inspection and will describe various aspects of the property as defined by the headings of the Single Survey report with the comments

being general and unbiased. The report on the location, style and condition of the property, will be concise and will be restricted to matters that could have a material effect upon value and will omit items that, in the Surveyor's opinion, are not significant. If certain minor matters are mentioned, it should not be interpreted that the property is free of any other minor defects.

Throughout the Report, the following repair categories will be used to give an overall opinion of the state of repair and condition of the property.

- 1 <u>Category 3:</u> Urgent repairs or replacement are needed now. Failure to deal with them may cause problems to other parts of the property or cause a safety hazard. Estimates for repairs or replacement are needed now.
- 2 <u>Category 2:</u> Repairs or replacement requiring future attention, but estimates are still advised.
- 3 Category 1: No immediate action or repair is needed.

WARNING: If left unattended, even for a relatively short period, Category 2 repairs can rapidly develop into more serious Category 3 repairs. The existence of Category 2 or Category 3 repairs may have an adverse effect on marketability, value and the sale price ultimately achieved for the property. This is particularly true during slow market conditions when the effect can be considerable.

Parts of the property, which cannot be seen or accessed, will not be reported upon and this will be stated. If the Surveyor suspects that a defect may exist within an unexposed area and which could have a material effect upon the value, he may recommend further investigation by specialist contractors.

2.4 SERVICES

Surveyors are not equipped or qualified to test the services and therefore no comment can be interpreted as implying that the design, installation and function of the services are in accordance/compliance with regulations, safety and efficiency expectations. However, comment is made where there is cause to suspect significant defects or shortcomings with the installations. No tests are made of any services or appliances.

2.5 ACCESSIBILITY

A section is included to help identify the basic information interested parties need to know to decide whether to view a property.

2.6 ENERGY REPORT

A section is included that makes provision for an Energy Report, relative to the property. The Surveyor will collect physical data from the property and provide such data in a format required by an accredited Energy Company. The Surveyor cannot of course accept liability for any advice given by the Energy Company.

2.7 VALUATION AND CONVEYANCER ISSUES

The last section of the Report contains matters considered relevant to the Conveyancer (Solicitor). It also contains the Surveyor's opinion both of the market value of the property and of the re-instatement cost, as defined below.

"Market Value" The estimated amount for which a property should exchange on the date of valuation between a willing buyer and a willing seller in an arm's-length transaction after proper marketing wherein the parties had each acted knowledgeably, prudently and without compulsion. In arriving at the opinion of the Market Value the Surveyor also makes various standard assumptions covering, for example, vacant possession; tenure and other legal considerations; contamination and hazardous materials; the condition of un-inspected parts; the right to use mains services; and the exclusion of curtains, carpets etc. from the valuation. In the case of flats, the following further assumptions are made that:

There are rights of access and exit over all communal roadways, corridors, stairways etc. and to use

communal grounds, parking areas, and other facilities;

- There are no particularly troublesome or unusual legal restrictions;
- There is no current dispute between the occupiers of the flats or any outstanding claims or losses; and the costs of repairs to the building are shared among the co-proprietors on an equitable basis.

Any additional assumption, or any found not to apply, is reported.

"Re-instatement cost" is an estimate for insurance purposes of the current cost of rebuilding the Property in its present form unless otherwise stated. This includes the cost of rebuilding the garage and permanent outbuildings, site clearance and professional fees, but excludes VAT (except on the fees).

Sellers or prospective Purchasers may consider it prudent to instruct a reinspection and revaluation after a period of 12 weeks (or sooner if appropriate) to reflect changing circumstances in the market and/or in the physical condition of the Property.

1. Information and scope of inspection

This section tells you about the type, accommodation, neighbourhood, age and construction of the property. It also tells you about the extent of the inspection and highlights anything that the surveyor could not inspect.

All references to visual inspection refer to an inspection from within the property without moving any obstructions and externally from ground level within the site and adjoining public areas. Any references to left or right in a description of the exterior of the property refer to the view of someone standing facing that part of the property from the outside.

The inspection is carried out without causing damage to the building or its contents and without endangering the occupiers or the surveyor. Heavy furniture, stored items and insulation are not moved. Unless identified in the report the surveyor will assume that no harmful or hazardous materials or techniques have been used in the construction. The presence or possible consequences of any site contamination will not be researched.

Services such as TV/cable connection, internet connection, swimming pools and other leisure facilities etc. will not be inspected or reported on.

Description	Two storey semi detached house.	
Accommodation	Ground floor: Entrance vestibule, hall, living room, dining room (or alternatively bedroom 4), kitchen and rear vestibule/utility room. Upper floor: Landing, 3 bedrooms, bathroom and toilet.	
Gross internal floor area (m²)	107m2 approximately.	
Neighbourhood and location	Residential area of varying house types with local shopping, educational, social and transport facilities available within close proximity.	
Age	1960 approximately.	
Weather	Dry and partly overcast and partly cloudy bright.	
Chimney stacks	Visually inspected with the aid of binoculars where appropriate.	
	There is a brick built and rendered chimney head with lead flashings.	

Roofing including roof space Sloping roofs were visually inspected with the aid of binoculars where appropriate. Flat roofs were visually inspected from vantage points within the property and where safe and reasonable to do so from a 3m ladder externally. Roof spaces were visually inspected and were entered where there was safe and reasonable access, normally defined as being from a 3m ladder within the property. If this is not possible, then physical access to the roof space may be taken by other means if the Surveyor deems it safe and reasonable to do so. The roof above the 2 storey building section is of timber framed pitched design clad in concrete interlocking tiles. The roof space was accessed from a hatch in the ceiling of the upper floor landing and comprises timber trusses with timber and compressed timber sarking and felt overlay. There is blanket insulation between and across the joists. The central area is floored. There were some stored items including some stored items on some roof space collars. The inspection could be undertaken from accessible/uncovered floored areas only. The roof above the single storey building section is flat and clad in felt. Where visible, the sarking is formed in woodwool. Rainwater fittings Visually inspected with the aid of binoculars where appropriate. PVC and cast iron gutters and downpipes. Main walls Visually inspected with the aid of binoculars where appropriate. Foundations and concealed parts were not exposed or inspected. The walls are largely of 300mm cavity brick construction. The remaining walls are assumed to be of 220mm or thereby brick construction. The walls have render and timber weatherboarding external finishes.

Windows, external doors and joinery	Internal and external doors were opened and closed where keys were available.
	Random windows were opened and closed where possible.
	Doors and windows were not forced open.
	uPVC double glazed windows.
	The outer front entrance doors are PVC framed double glazed. The inner front entrance door is formed in timber. The side entrance door is PVC framed double glazed.
	The eaves areas are clad in PVC.
External decorations	Visually inspected.
	Painted finishes.
Conservatories / porches	None
Communal areas	None
Garages and permanent outbuildings	None
Outside areas and boundaries	Visually inspected.
	There are garden grounds to the front, side and rear generally laid to grass, stone chips and paving. Boundaries are generally marked by hedging and brick/block walling.
Ceilings	Visually inspected from floor level.
	These are formed in plasterboard.
Internal walls	Visually inspected from floor level.
	Using a moisture meter, walls were randomly tested for dampness where considered appropriate.
	The walls are formed in plastered masonry.

Floors including sub floors	Surfaces of exposed floors were visually inspected. No carpets or floor coverings were lifted.
	Physical access to the sub floor area may be taken if the Surveyor deems it is safe and reasonable to do so, and subject to a minimum clearance of 1m between the underside of floor joists and the solum as determined from the access hatch.
	Sub-floor areas were inspected only to the extent visible from a readily accessible and unfixed hatch by way of an inverted "head and shoulders" inspection at the access point.
	The flooring is generally of suspended timber construction with tongue and grooved boarding laid on timber joists. The remaining flooring is of concrete construction. The floors were predominantly covered by fitted floor coverings. There was no means of access to any sub floor areas.
Internal joinery and kitchen fittings	Built-in cupboards were looked into but no stored items were moved.
	Kitchen units were visually inspected excluding appliances.
	Painted softwood finishes with timber panelled internal doors. The kitchen is fitted with a combination of base and wall mounted units. There are fitted cupboards in the rear vestibule/utility room.
Chimney breasts and fireplaces	Visually inspected.
	No testing of the flues or fittings was carried out.
	The chimney breast is formed in plastered masonry. A gas fire is attached.
Internal decorations	Visually inspected.
	The decoration comprises a combination of painted and papered finishes.
Cellars	None

Electricity	Accessible parts of the wiring were visually inspected without removing fittings. No tests whatsoever were carried out to the system or appliances. Visual inspection does not assess any services to make sure they work properly and efficiently and meet modern standards. If any services are turned off, the surveyor will state that in the report and will not turn them on. Mains supply. The electricity meter and switchgear are located within a hallway cabinet.
Gas	Accessible parts of the system were visually inspected without removing fittings. No tests whatsoever were carried out to the system or appliances. Visual inspection does not assess any services to make sure they work properly and efficiently and meet modern standards. If any services are turned off, the surveyor will state that in the report and will not turn them on.
	Mains supply. The gas meter is located externally.
1	
Water, plumbing, bathroom fittings	Visual inspection of the accessible pipework, water tanks, cylinders and fittings without removing any insulation.
	No tests whatsoever were carried out to the system or appliances.
	Mains supply. The plumbing installation is formed in a combination of metal and plastic pipework. White sanitary ware is installed with a mixer shower over the bath.
Heating and hot water	Visual inspection of the accessible pipework, water tanks, cylinders and fittings without removing any insulation.
	No tests whatsoever were carried out to the system or appliances.
	Gas boiler with radiators. The floor mounted boiler is located in the rear vestibule/utility room and heats a series of radiators. The boiler also provides the hot water supply via a cylinder located in the rear vestibule/utility room.
Drainage	Drainage covers etc. were not lifted.
	Diamage covers etc. were not inted.
	Neither drains nor drainage systems were tested.
	To the main sewer.

Fire, smoke and burglar alarms

Visually inspected.

No tests whatsoever were carried out to the system or appliances.

Fire Safety Legislation effective from February 2022 requires a smoke alarm to be installed in the room most frequently used for living purposes and in every circulation space on each floor. A heat detecting alarm must be installed in every kitchen area and all smoke and heat alarms must be ceiling mounted and interlinked. Where there is a carbon-fuelled appliance e.g. central heating boiler, open fire, wood burning stove etc, a carbon monoxide detector is also required. The purchaser(s) should appraise themselves of the requirements of this legislation and engage with appropriately accredited contractors to ensure compliance.

Any additional limits to inspection

For flats / maisonettes

Only the subject flat and internal communal areas giving access to the flat were inspected.

If the roof space or under-building / basement is communal, reasonable and safe access is not always possible. If no inspection was possible, this will be stated. If no inspection was possible, the surveyor will assume that there are no defects that will have a material effect on the valuation.

The building containing the flat, including any external communal areas, was visually inspected only to the extent that the surveyor is able to give an opinion on the general condition and standard of maintenance.

At the time of inspection the property was unoccupied, partly furnished and the majority of floors were covered. Inspection of the roof space was limited by the presence of insulation material. All unseen areas are assumed to be free from defect.

There were stored items in the upper level front right bedroom cupboard closest to the head of the staircase.

Floors have varying styles of covering. It was not possible to inspect areas of flooring beneath the baths, shower cubicles, WCs or similar water using appliances and accordingly no comment can be made on the condition of enclosed flooring.

Services have not been tested. To have these tested arrangements should be made with suitably qualified electricians, plumbers, heating engineers, etc.

Windows and external doors were not all fully opened or tested.

The construction materials described in this report should not be considered as an exact specification. They are described for general guide only and based on a non-disruptive, visual inspection.


Due to the nature and/or age of some properties, deleterious materials e.g. asbestos or Reinforced Autoclaved Aerated Concrete (RAAC) can be present in the building fabric and/or the finished surfaces to such e.g. hidden walls or roof sections, textured coatings such as Artex, floor/ceiling/wall tiles, claddings, linings etc. If any of these elements are applicable to the property under report and should you require certainty of the construction of any part of the property (including any outbuildings or garages) then a detailed Building Survey or sample testing of materials by qualified technicians/scientists would be required. This degree of reporting is clearly outside the scope of the Home Report.

This is not an Asbestos survey and should not be construed as such. Should an inspection to identify asbestos or other deleterious materials within the property e.g. Reinforced Autoclaved Aerated Concrete (RAAC) be required this should be provided by suitably qualified specialists under separate instructions.

An inspection for Japanese Knotweed was not carried out. This is a plant which is subject to control regulation, is considered to be invasive and one which can render a property unsuitable for some mortgage lenders. It is therefore assumed that there is no Japanese Knotweed within the boundaries of the property or its neighbouring property. Identification of Japanese Knotweed is best undertaken by a specialist contractor.

Adverse weather conditions can expose underlying defects to parts of the building fabric that are not apparent during good or dry conditions. This is particularly the case with roofs, including flashings and abutments, e.g. at extensions, conservatories or with neighbouring property. A good building maintenance programme is essential with roof areas inspected/maintained regularly by reputable contractors and especially after inclement weather.

Sectional Diagram showing elements of a typical house

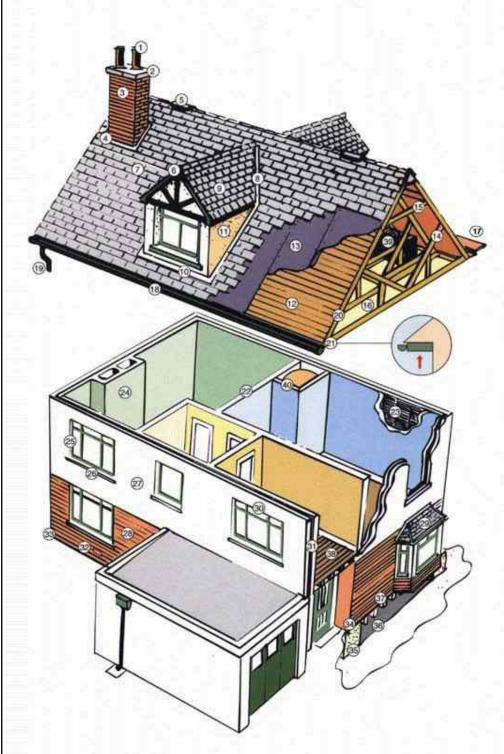

Reference may be made in this report to some or all of the above component parts of the property. This diagram may assist you in locating and understanding these items.

- 1) Chimney pots
- 2) Coping stone
- 3) Chimney head
- (4) Flashing
- 5) Ridge ventilation
- 6) Ridge board
- 7) Slates / tiles
- 8 Valley guttering
- 9 Dormer projection
- 10 Dormer flashing
- 11) Dormer cheeks
- (12) Sarking
- 13) Roof felt
- 14) Trusses
- (15) Collar
- 16) Insulation
- (17) Parapet gutter
- 18) Eaves guttering
- (19) Rainwater downpipe
- 20) Verge boards/skews
- 21) Soffit boards
- 22) Partition wall
- 23) Lath / plaster
- (24) Chimney breast
- 25) Window pointing
- 26) Window sills
- 27) Rendering
- 28) Brickwork / pointing
- 29 Bay window projection
- (30) Lintels
- (31) Cavity walls / wall ties
- 32) Subfloor ventilator
- (33) Damp proof course
- 34) Base course
- 35) Foundations
- 36) Solum
- 37) Floor joists
- 38) Floorboards
- 39) Water tank
- 40) Hot water tank

2. Condition

This section identifies problems and tells you about the urgency of any repairs by using one of the following three categories:

Category 3	Category 2	Category 1
	Repairs or replacement requiring future attention, but estimates are still advised.	

Structural movement	
Repair category	1
Notes	No indications of current significant structural movement.

Dampness, rot and infestation	
Repair category	2
Notes	The vendor advised that woodworm treatments were undertaken in 2005 and that a 30 year guarantee was provided. Notwithstanding this, it is good practice to have the property, including the roof space and all accessible sub floor areas, inspected by a suitably qualified timber and damp specialist to establish whether any further treatments are required.

Chimney stacks	
Repair category	2
Notes	The chimney head is affected by weathering and moss build-up.
	There is evidence of water ingress in the form of stained and damp roof timbers and sarking in the roof space around the chimney head.

Roofing including roof space	
Repair category	2
Notes	The roof tiles are affected by weathering and moss build-up.
	There is evidence of water ingress in the form of stained and damp roof timbers and sarking in the roof space.
	The roof covering above the single storey building section is affected by weathering and moss build-up. Felt roofs require ongoing maintenance and can be prone to sudden failure.

Rainwater fittings	
Repair category	2
Notes	The cast iron rainwater fittings are affected by corrosion. It should be appreciated it was not raining at the time of inspection and we are therefore unable to confirm that all rainwater good joints are watertight. It is widely recommended that monitoring of rainwater goods be undertaken particularly in periods of heavy rainfall.

Main walls	
Repair category	2
Notes	There is some open mortar pointing.
	There is some cracked, weathered and patched render.
	There is some cracked concrete at the right hand verge underneath the PVC verge tiles.

Windows, external doors and joinery	
Repair category	2
Notes	The kitchen window is in excess of 30 years old and therefore may be approaching the end of its normal life expectancy.
	Double glazed units deteriorate as they age and can fail at any time. Opening mechanisms and seals are particularly prone to unexpected failure.

External decorations	
Repair category	2
Notes	There are some weathered painted finishes.

Conservatories/porches	
Repair category	N/A
Notes	

Communal areas	
Repair category	N/A
Notes	

Garages and permanent outbuildings	
Repair category	N/A
Notes	

Outside areas and boundaries	
Repair category	2
Notes	There is some off level boundary walling.

Ceilings	
Repair category	1
Notes	There is staining on the bathroom ceiling. The affected area was found to be dry where tested with a moisture meter.

Internal walls	
Repair category	1
Notes	No significant defects.

Floors including sub-floors	
Repair category	1
Notes	No significant defects.

Internal joinery and kitchen fittings	
Repair category	2
Notes	The joinery is consistent with age and type and the kitchen fittings are affected by wear and tear.
	There are large gaps in the staircase balustrade.
	The glazing in glazed internal pass doors does not appear to be of a toughened nature.

Chimney breasts and fireplaces	
Repair category	2
Notes	The gas fire is of a significant age and may be approaching the end of its normal life expectancy. It is good practice to have the gas fire checked on change of occupancy and annually thereafter by a Gas Safe engineer.

Internal decorations	
Repair category	2
Notes	The decorative finishes are affected by wear and tear.

Cellars	
Repair category	N/A
Notes	

Electricity	
Repair category	1
Notes	It is assumed that building regulation approval has been obtained for any electrical alteration or installation carried out after 1 January 2005. The Institution of Engineering and Technology (IET) recommends that inspections and testings are undertaken at least every five years and on a change of occupancy for tenanted property or every ten years or change of ownership for owner occupied properties. It should be appreciated that only the most recently constructed or re-wired properties will have installations which fully comply with IET regulations and codes of practice.

Gas	
Repair category	1
Notes	In the interests of safety and to meet current regulations, all gas appliances, pipework and fittings should be checked by a registered 'Gas Safe' engineer with any repairs or replacements recommended by the engineer carried out immediately.
	Current good practice states that gas pipes and meters should be positioned in areas with good accessibility and should be spaced at least 150mm (6 inches) from electricity meters, switchboards, electric cables, sockets, telecommunication cables, consumer units and/or any other conductors.

Water, plumbing and bathroom fittings		
Repair category	2	
Notes	The majority of the sanitary ware is of a significant age and is affected by wear and tear.	

Heating and hot water		
Repair category	2	
Notes	The majority of the radiators are of a significant age and may be approaching the end of their normal life expectancy.	
	It is understood that the central heating boiler is 18 years or more old and therefore may be approaching the end of its normal life expectancy.	
	The hot water cylinder is of a significant age and therefore may be approaching the end of its normal life expectancy.	
	It is good practice to have the heating system checked on change of occupancy and annually thereafter by a Gas Safe engineer.	

Drainage	
Repair category	1
Notes	No indications of problems with the drainage system.

Set out below is a summary of the condition of the property which is provided for reference only. You should refer to the previous comments for detailed information.

Structural movement	1
Dampness, rot and infestation	2
Chimney stacks	2
Roofing including roof space	2
Rainwater fittings	2
Main walls	2
Windows, external doors and joinery	2
External decorations	2
Conservatories/porches	N/A
Communal areas	N/A
Garages and permanent outbuildings	N/A
Outside areas and boundaries	2
Ceilings	1
Internal walls	1
Floors including sub-floors	1
Internal joinery and kitchen fittings	2
Chimney breasts and fireplaces	2
Internal decorations	2
Cellars	N/A
Electricity	1
Gas	1
Water, plumbing and bathroom fittings	2
Heating and hot water	2
Drainage	1

Category 3

Urgent repairs or replacement are needed now. Failure to deal with them may cause problems to other parts of the property or cause a safety hazard. Estimates for repairs or replacement are needed now.

Category 2

Repairs or replacement requiring future attention, but estimates are still advised.

Category 1

No immediate action or repair is needed.

Remember

The cost of repairs may influence the amount someone is prepared to pay for the property. We recommend that relevant estimates and reports are obtained in your own name.

Warning

If left unattended, even for a relatively short period, Category 2 repairs can rapidly develop into more serious Category 3 repairs. The existence of Category 2 or Category 3 repairs may have an adverse effect on marketability, value and the sale price ultimately achieved for the property. This is particularly true during slow market conditions where the effect can be considerable.

3. Accessibility information

Guidance notes on accessibility information

Three steps or fewer to a main entrance door of the property:

In flatted developments the 'main entrance' would be the flat's own entrance door, not the external door to the communal stair. The 'three steps or fewer' are counted from external ground level to the flat's entrance door. Wherea lift is present, the count is based on the number of steps climbed when using the lift.

Unrestricted parking within 25 metres:

For this purpose, 'Unrestricted parking' includes parking available by means of a parking permit. Restricted parking includes parking that is subject to parking restrictions, as indicated by the presence of solid yellow, red or white lines at the edge of the road or by a parking control sign, parking meters or other coin-operated machines.

1. Which floor(s) is the living accommodation on?		Ground and first		
2. Are there three steps or fewer to a main entrance door of the property?	Yes	X	No	
3. Is there a lift to the main entrance door of the property?	Yes		No	X
4. Are all door openings greater than 750mm?	Yes		No	X
5. Is there a toilet on the same level as the living room and kitchen?	Yes		No	X
6. Is there a toilet on the same level as a bedroom?	Yes	X	No	
7. Are all rooms on the same level with no internal steps or stairs?	Yes		No	X
8. Is there unrestricted parking within 25 metres of an entrance door to the building?	Yes	X	No	

4. Valuation and conveyancer issues

This section highlights information that should be checked with a solicitor or licensed conveyancer. It also gives an opinion of market value and an estimated reinstatement cost for insurance purposes.

Matters for a solicitor or licensed conveyancer

It is understood that woodworm treatments were undertaken in 2005 and guarantees should be assigned.

Unless stated otherwise within this report and in the absence of any information to the contrary, we have assumed that:

All buildings have been erected either prior to planning control, or in accordance with planning permissions, and have the benefit of permanent planning consents or existing use rights for their current use;

The property is not adversely affected by town planning or road proposals;

All alterations, additions or extensions to the property have received all necessary Town Planning Consents, Building Authority Approvals (Building Warrants) and Completion Certificates;

The property complies with all relevant statutory and local authority requirements, including but not limited to Fire Regulations, The Equality Act, The Control of Asbestos Act, Health and Safety Regulations, Environmental Health Regulations, Regulations governing Residential Tenancies and similar.

Estimated reinstatement cost for insurance purposes

The property should be insured on a reinstatement basis for not less than £256,000 (TWO HUNDRED AND FIFTY SIX THOUSAND POUNDS).

This is an indicative figure only, based on the current Building Cost Information Service (BCIS) published rates. It is good practice to regularly review this figure as building costs can increase rapidly. Specific specialist advice should be obtained from the building insurers where necessary.

Valuation and market comments

The market value of the property, at the present time, may be fairly stated in the sum of £170,000 (ONE HUNDRED AND SEVENTY THOUSAND POUNDS).

The housing market has been buoyant since reopening after the Covid19 pandemic with demand levels often exceeding supply, resulting in some record sales levels. However, there is currently a degree of economic uncertainty, with rising costs and it is prudent to keep the valuation under constant review.

Signed	Calum Steven
	Electronically signed :- 17/03/2025 14:55

Report author	Calum Steven
Company name	J & E Shepherd Chartered Surveyors
Address	65-67 Strathmore House East Kilbride G74 1LF
Date of report	11/03/2025



www.shepherd.co.uk

Property Address	
Address	24 Wingate Crescent, East Kilbride, Glasgow, G74 3JA
Seller's Name	EUAN DUNN
Date of Inspection	11/03/2025
Property Details	
Property Type X House	Bungalow Purpose built maisonette Converted maisonette
Purpose built flat	Converted flat Tenement flat Flat over non-residential use
	Other (specify in General Remarks)
Property Style Detached	X Semi detached Mid terrace End terrace
Back to back	☐ High rise block ☐ Low rise block ☐ Other (specify in General Remarks)
Does the surveyor believe that the r	property was built for the public sector, e. g. local authority,
military, police?	rioperty was built for the public sector, e. g. local authority,
Flats/Maisonettes only Floor(s) on whi	ich located No. of floors in block Lift provided? Yes No
•	No. of units in block
Approximate Year of Construction	1960
Tenure	
X Absolute Ownership C	ther
Accommodation	
Accommodation	
Number of Rooms 1 Living room	
1 Bathroom(s)	1 WC(s) 1 Other (Specify in General remarks)
Gross Floor Area (excluding garages	s and outbuildings) 107 m² (Internal) m² (External)
Residential Element (greater than 40	ivo)
Garage / Parking / Outbuildings	
Single garage Double gara	age
Available on site?	No
Permanent outbuildings:	
None	
None	

Construction	
Walls X Brick Stone Concrete Timber frame Other (specify in General Roof X Tile Slate Asphalt Felt Other (specify in General	
Special Risks	
Has the property suffered structural movement? Yes X No	
If Yes, is this recent or progressive?	
Is there evidence, history, or reason to anticipate subsidence, heave, landslip or flood in \square Yes \boxtimes No the immediate vicinity?	
If Yes to any of the above, provide details in General Remarks.	
Service Connections	
Based on visual inspection only. If any services appear to be non-mains, please comment on the type and the supply in General Remarks	locationof
Drainage X Mains Private None Water X Mains Private	None
Electricity X Mains Private None Gas X Mains Private	None
Central Heating X Yes Partial None	
Brief description of Central Heating and any non mains services: Gas boiler with radiators.	
Cas polici with radiators.	
Cita	
Site Apparent legal issues to be verified by the conveyancer. Please provide a brief description in General Ren	narke
Rights of way Shared drives / access Garage or other amenities on separate site Shared service connections	iaiks.
Ill-defined boundaries Agricultural land included with property Other (specify in General Re	marks)
Location	
Residential suburb X Residential within town / city Mixed residential / commercial Shared service connect	ions
Commuter village Semote village Isolated rural property Other (specify in Gener	al Remarks)
Planning Issues	
Has the property been extended / converted / altered? Yes X No If Yes provide details in General Remarks.	
Roads	
Made up road Unmade road Partly completed new road Pedestrian access only X Adopted Un	adopted

General Remarks	
The condition of the property is consistent with age and type requiring some routine maintenance and modernisation which accounted for in the valuation.	ch has been
In addition to the accommodation listed above, there is a rear vestibule/utility room.	
The property is located within a residential area of varying house types with local amenities available within close proximi	ty.
It is understood that woodworm treatments were undertaken in 2005 and guarantees should be assigned.	
Essential Repairs	
None	
Estimated cost of essential repairs N/A	
Retention recommended? Yes X No	
Retention amount N/A	
Comment on Mortgageability	
The property forms adequate security for mortgage purposes.	
Valuation	
Market value in present condition	£ 170,000
Market value on completion of essential repairs	£
Insurance reinstatement value	£ 256,000
(to include the cost of total rebuilding, site clearance, professional fees, ancillary charges plus VAT)	
Is a reinspection necessary?	Yes X No

Declaration

Signed Calum Steven

Electronically signed :- 17/03/2025 14:55

Surveyor's name Calum Steven

Professional qualifications BA (Hons) MSc MRICS

Company name J & E Shepherd Chartered Surveyors

Address 65-67 Strathmore House, East Kilbride, G74 1LF

Telephone 01355 229 317

Email Address eastkilbride@shepherd.co.uk

Date of Inspection 11/03/2025



Energy Performance Certificate



Energy Performance Certificate (EPC)

Dwellings

Scotland

24 WINGATE CRESCENT, EAST KILBRIDE, GLASGOW, G74 3JA

Dwelling type: Semi-detached house **Date of assessment:** 11 March 2025

Date of certificate: 17 March 2025

Total floor area: 107 m²

Primary Energy Indicator: 332 kWh/m²/year

Reference number: 0100-2719-8170-2595-6935 **Type of assessment:** RdSAP, existing dwelling

Approved Organisation: Elmhurst

Main heating and fuel: Boiler and radiators, mains


gas

You can use this document to:

- Compare current ratings of properties to see which are more energy efficient and environmentally friendly
- Find out how to save energy and money and also reduce CO₂ emissions by improving your home

Estimated energy costs for your home for 3 years*	£5,553	See your recommendations
Over 3 years you could save*	£2,373	report for more information

^{*} based upon the cost of energy for heating, hot water, lighting and ventilation, calculated using standard assumptions




Energy Efficiency Rating

This graph shows the current efficiency of your home, taking into account both energy efficiency and fuel costs. The higher this rating, the lower your fuel bills are likely to be.

Your current rating is **band D (60)**. The average rating for EPCs in Scotland is **band D (61)**.

The potential rating shows the effect of undertaking all of the improvement measures listed within your recommendations report.



Environmental Impact (CO₂) Rating

This graph shows the effect of your home on the environment in terms of carbon dioxide (CO_2) emissions. The higher the rating, the less impact it has on the environment.

Your current rating is **band E (52)**. The average rating for EPCs in Scotland is **band D (59)**.

The potential rating shows the effect of undertaking all of the improvement measures listed within your recommendations report.

Top actions you can take to save money and make your home more efficient

Recommended measures	Indicative cost	Typical savings over 3 years
1 Flat roof or sloping ceiling insulation	£850 - £1,500	£204.00
2 Cavity wall insulation	£500 - £1,500	£411.00
3 Internal or external wall insulation	£4,000 - £14,000	£258.00

A full list of recommended improvement measures for your home, together with more information on potential cost and savings and advice to help you carry out improvements can be found in your recommendations report.

To find out more about the recommended measures and other actions you could take today to stop wasting energy and money, visit greenerscotland.org or contact Home Energy Scotland on 0808 808 2282.

THIS PAGE IS THE ENERGY PERFORMANCE CERTIFICATE WHICH MUST BE AFFIXED TO THE DWELLING AND NOT BE REMOVED UNLESS IT IS REPLACED WITH AN UPDATED CERTIFICATE

Summary of the energy performance related features of this home

This table sets out the results of the survey which lists the current energy-related features of this home. Each element is assessed by the national calculation methodology; 1 star = very poor (least efficient), 2 stars = poor, 3 stars = average, 4 stars = good and 5 stars = very good (most efficient). The assessment does not take into consideration the condition of an element and how well it is working. 'Assumed' means that the insulation could not be inspected and an assumption has been made in the methodology, based on age and type of construction.

Element	Description	Energy Efficiency	Environmental
Walls	Cavity wall, as built, no insulation (assumed) Solid brick, as built, no insulation (assumed)	**☆☆☆ **☆☆☆	★★☆☆☆ ★★☆☆☆
Roof	Pitched, 300 mm loft insulation Flat, no insulation (assumed)	**** ***	**** *☆☆☆☆
Floor	Suspended, no insulation (assumed) Solid, no insulation (assumed)	_ _	_ _
Windows	Fully double glazed	****	★★★ ☆
Main heating	Boiler and radiators, mains gas	****	★★★ ☆
Main heating controls	Programmer and room thermostat	★★★☆☆	***
Secondary heating	None	_	_
Hot water	From main system, no cylinder thermostat	***☆☆	***
Lighting	Low energy lighting in 82% of fixed outlets	****	****

The energy efficiency rating of your home

Your Energy Efficiency Rating is calculated using the standard UK methodology, RdSAP. This calculates energy used for heating, hot water, lighting and ventilation and then applies fuel costs to that energy use to give an overall rating for your home. The rating is given on a scale of 1 to 100. Other than the cost of fuel for electrical appliances and for cooking, a building with a rating of 100 would cost almost nothing to run.

As we all use our homes in different ways, the energy rating is calculated using standard occupancy assumptions which may be different from the way you use it. The rating also uses national weather information to allow comparison between buildings in different parts of Scotland. However, to make information more relevant to your home, local weather data is used to calculate your energy use, CO₂ emissions, running costs and the savings possible from making improvements.

The impact of your home on the environment

One of the biggest contributors to global warming is carbon dioxide. The energy we use for heating, lighting and power in our homes produces over a quarter of the UK's carbon dioxide emissions. Different fuels produce different amounts of carbon dioxide for every kilowatt hour (kWh) of energy used. The Environmental Impact Rating of your home is calculated by applying these 'carbon factors' for the fuels you use to your overall energy use.

The calculated emissions for your home are 59 kg CO₂/m²/yr.

The average Scottish household produces about 6 tonnes of carbon dioxide every year. Based on this assessment, heating and lighting this home currently produces approximately 6.3 tonnes of carbon dioxide every year. Adopting recommendations in this report can reduce emissions and protect the environment. If you were to install all of these recommendations this could reduce emissions by 3.9 tonnes per year. You could reduce emissions even more by switching to renewable energy sources.

Estimated energy costs for this home

	Current energy costs	Potential energy costs	Potential future savings
Heating	£4,077 over 3 years	£2,481 over 3 years	
Hot water	£1,107 over 3 years	£330 over 3 years	You could
Lighting	£369 over 3 years	£369 over 3 years	save £2,373
Total	s £5,553	£3,180	over 3 years

These figures show how much the average household would spend in this property for heating, lighting and hot water. This excludes energy use for running appliances such as TVs, computers and cookers, and the benefits of any electricity generated by this home (for example, from photovoltaic panels). The potential savings in energy costs show the effect of undertaking all of the recommended measures listed below.

Recommendations for improvement

The measures below will improve the energy and environmental performance of this dwelling. The performance ratings after improvements listed below are cumulative; that is, they assume the improvements have been installed in the order that they appear in the table. Further information about the recommended measures and other simple actions to take today to save money is available from the Home Energy Scotland hotline which can be contacted on 0808 808 2282. Before carrying out work, make sure that the appropriate permissions are obtained, where necessary. This may include permission from a landlord (if you are a tenant) or the need to get a Building Warrant for certain types of work.

Da	a a managarina a	Indicative cost	Typical saving	Rating after improvement	
Re	commended measures	indicative cost	per year	Energy	Environment
1	Flat roof or sloping ceiling insulation	£850 - £1,500	£68	D 61	E 54
2	Cavity wall insulation	£500 - £1,500	£137	D 64	D 57
3	Internal or external wall insulation	£4,000 - £14,000	£86	D 66	D 60
4	Floor insulation (suspended floor)	£800 - £1,200	£124	D 68	D 63
5	Increase hot water cylinder insulation	£15 - £30	£50	C 70	D 65
6	Hot water cylinder thermostat	£200 - £400	£97	C 72	D 68
7	Replace boiler with new condensing boiler	£2,200 - £3,000	£172	C 75	C 73
8	Solar water heating	£4,000 - £6,000	£56	(C 77	C 75
9	Solar photovoltaic panels, 2.5 kWp	£3,500 - £5,500	£389	B 85	B 83

Alternative measures

There are alternative improvement measures which you could also consider for your home. It would be advisable to seek further advice and illustration of the benefits and costs of such measures.

- External insulation with cavity wall insulation
- Micro CHP

Choosing the right improvement package

For free and impartial advice on choosing suitable measures for your property, contact the Home Energy Scotland hotline on 0808 808 2282 or go to www.greenerscotland.org.



About the recommended measures to improve your home's performance rating

This section offers additional information and advice on the recommended improvement measures for your home

1 Flat roof or sloping ceiling insulation

Insulating a flat roof or sloping ceiling will significantly reduce heat loss through the roof; this will improve levels of comfort, reduce energy use and lower fuel bills. Insulation can be placed on top of the roof under the waterproof membrane and should particularly be considered when the waterproofing needs to be replaced. Further information about roof insulation and details of local contractors can be obtained from the National Insulation Association (www.nationalinsulationassociation.org.uk). Building regulations generally apply to this work so it is best to check with your local authority building standards department.

2 Cavity wall insulation

Cavity wall insulation, to fill the gap between the inner and outer layers of external walls with an insulating material, reduces heat loss; this will improve levels of comfort, reduce energy use and lower fuel bills. The insulation material is pumped into the gap through small holes that are drilled into the outer walls, and the holes are made good afterwards. As specialist machinery is used to fill the cavity, a professional installation company should carry out this work, and they should carry out a thorough survey before commencing work to ensure that this type of insulation is suitable for this home and its exposure. They should also provide a guarantee for the work and handle any building standards issues. Further information about cavity wall insulation and details of local installers can be obtained from the National Insulation Association (www.nationalinsulationassociation.org.uk).

3 Internal or external wall insulation

Internal or external wall insulation involves adding a layer of insulation to either the inside or the outside surface of the external walls, which reduces heat loss and lowers fuel bills. As it is more expensive than cavity wall insulation it is only recommended for walls without a cavity, or where for technical reasons a cavity cannot be filled. Internal insulation, known as dry-lining, is where a layer of insulation is fixed to the inside surface of external walls; this type of insulation is best applied when rooms require redecorating. External solid wall insulation is the application of an insulant and a weather-protective finish to the outside of the wall. This may improve the look of the home, particularly where existing brickwork or rendering is poor, and will provide long-lasting weather protection. Further information can be obtained from the National Insulation Association (www.nationalinsulationassociation.org.uk). It should be noted that a building warrant is required for the installation of external wall insulation. Planning permission may also be required and that building regulations apply to external insulation so it is best to check with your local authority on both issues.

4 Floor insulation (suspended floor)

Insulation of a floor will significantly reduce heat loss; this will improve levels of comfort, reduce energy use and lower fuel bills. Suspended floors can often be insulated from below but must have adequate ventilation to prevent dampness; seek advice about this if unsure. Further information about floor insulation is available from many sources including www.energysavingtrust.org.uk/scotland/Insulation/Floor-insulation. Building regulations generally apply to this work so it is best to check with your local authority building standards department.

5 Hot water cylinder insulation

Increasing the thickness of existing insulation around the hot water cylinder will help to maintain the water at the required temperature; this will reduce the amount of energy used and lower fuel bills. An additional cylinder jacket or other suitable insulation layer can be used. The insulation should be fitted over any thermostat clamped to the cylinder. Hot water pipes from the hot water cylinder should also be insulated, using pre-formed pipe insulation of up to 50 mm thickness, or to suit the space available, for as far as they can be accessed to reduce losses in summer. All these materials can be purchased from DIY stores and installed by a competent DIY enthusiast.

6 Cylinder thermostat

A hot water cylinder thermostat enables the boiler to switch off when the water in the cylinder reaches the required temperature; this minimises the amount of energy that is used and lowers fuel bills. The thermostat is a temperature sensor that sends a signal to the boiler when the required temperature is reached. To be fully effective it needs to be sited in the correct position and hard wired in place, so it should be installed by a competent plumber or heating engineer. Building regulations apply to this work, so it is best to check with your local authority building standards department whether a building warrant will be required.

7 Condensing boiler

A condensing boiler is capable of much higher efficiencies than other types of boiler, meaning it will burn less fuel to heat this property. This improvement is most appropriate when the existing central heating boiler needs repair or replacement, however there may be exceptional circumstances making this impractical. Condensing boilers need a drain for the condensate which limits their location; remember this when considering remodelling the room containing the existing boiler even if the latter is to be retained for the time being (for example a kitchen makeover). Building regulations generally apply to this work and a building warrant may be required, so it is best to check with your local authority building standards department and seek advice from a qualified heating engineer.

8 Solar water heating

A solar water heating panel, usually fixed to the roof, uses the sun to pre-heat the hot water supply. This can significantly reduce the demand on the heating system to provide hot water and hence save fuel and money. Planning permission might be required, building regulations generally apply to this work and a building warrant may be required, so it is best to check these with your local authority. You could be eligible for Renewable Heat Incentive payments which could appreciably increase the savings beyond those shown on your EPC, provided that both the product and the installer are certified by the Microgeneration Certification Scheme (or equivalent). Details of local MCS installers are available at www.microgenerationcertification.org.

9 Solar photovoltaic (PV) panels

A solar PV system is one which converts light directly into electricity via panels placed on the roof with no waste and no emissions. This electricity is used throughout the home in the same way as the electricity purchased from an energy supplier. Planning permission might be required, building regulations generally apply to this work and a building warrant may be required, so it is best to check with your local authority. The assessment does not include the effect of any Feed-in Tariff which could appreciably increase the savings that are shown on this EPC for solar photovoltaic panels, provided that both the product and the installer are certified by the Microgeneration Certification Scheme (or equivalent). Details of local MCS installers are available at www.microgenerationcertification.org.

Low and zero carbon energy sources

Low and zero carbon (LZC) energy sources are sources of energy that release either very little or no carbon dioxide into the atmosphere when they are used. Installing these sources may help reduce energy bills as well as cutting carbon.

LZC energy sources present: There are none provided for this home

Your home's heat demand

In this section, you can see how much energy you might need to heat your home and provide hot water. These are estimates showing how an average household uses energy. These estimates may not reflect your actual energy use, which could be higher or lower. You might spend more money on heating and hot water if your house is less energy efficient. The table below shows the potential benefit of having your loft and walls insulated. Visit https://energysavingtrust.org.uk/energy-at-home for more information.

Heat demand	Existing dwelling	Impact of loft insulation	Impact of cavity wall insulation	Impact of solid wall insulation
Space heating (kWh per year)	15,645	N/A	(1,748)	(1,092)
Water heating (kWh per year)	4,506			

Addendum

About this document

This Recommendations Report and the accompanying Energy Performance Certificate are valid for a maximum of ten years. These documents cease to be valid where superseded by a more recent assessment of the same building carried out by a member of an Approved Organisation.

The Energy Performance Certificate and this Recommendations Report for this building were produced following an energy assessment undertaken by an assessor accredited by Elmhurst (www.elmhurstenergy.co.uk), an Approved Organisation Appointed by Scottish Ministers. The certificate has been produced under the Energy Performance of Buildings (Scotland) Regulations 2008 from data lodged to the Scottish EPC register. You can verify the validity of this document by visiting www.scottishepcregister.org.uk and entering the report reference number (RRN) printed at the top of this page.

Assessor's name: Mr. Calum Steven Assessor membership number: EES/022236

Company name/trading name: Shepherd Whyte & Barrie Address: 67 Srathmore House

East Kilbride G74 1LQ

Phone number: 01698891400

Email address: calum.steven@wbcs.co.uk

Related party disclosure: No related party

If you have any concerns regarding the content of this report or the service provided by your assessor you should in the first instance raise these matters with your assessor and with the Approved Organisation to which they belong. All Approved Organisations are required to publish their complaints and disciplinary procedures and details can be found online at the web address given above.

Use of this energy performance information

Once lodged by your EPC assessor, this Energy Performance Certificate and Recommendations Report are available to view online at www.scottishepcregister.org.uk, with the facility to search for any single record by entering the property address. This gives everyone access to any current, valid EPC except where a property has a Green Deal Plan, in which case the report reference number (RRN) must first be provided. The energy performance data in these documents, together with other building information gathered during the assessment is held on the Scottish EPC Register and is available to authorised recipients, including organisations delivering energy efficiency and carbon reduction initiatives on behalf of the Scottish and UK governments. A range of data from all assessments undertaken in Scotland is also published periodically by the Scottish Government. Further information on these matters and on Energy Performance Certificates in general, can be found at www.gov.scot/epc.

Advice and support to improve this property

There is support available, which could help you carry out some of the improvements recommended for this property on page 3 and stop wasting energy and money. For more information, visit greeners cotland.org or contact Home Energy Scotland on 0808 808 2282.

Home Energy Scotland's independent and expert advisors can offer free and impartial advice on all aspects of energy efficiency, renewable energy and more.

HOMEENERGYSCOTLAND.ORG
0808 808 2282
FUNDED BY THE SCOTTISH GOVERNMENT





Property Questionnaire



Property address	24 Wingate Crescent East Kilbride Glasgow G74 3JA
Seller(s)	EUAN DUNN
Completion date of property questionnaire	17/03/2025

Note for sellers

- Please complete this form carefully. It is important that your answers are correct.
- The information in your answers will help ensure that the sale of your house goes smoothly. Please answer each question with as much detailed information as you can.
- If anything changes after you fill in this questionnaire but before the date of entry for the sale of your house, tell your solicitor or estate agent immediately.

Information to be given to prospective buyer(s)

1.	Length of ownership		
	How long have you owned the proper	rty?	Mothers 60 years
2.	Council tax		
	Which Council Tax band is your propo	erty in?	D
3.	Parking		
	What are the arrangements for parkir (Please tick all that apply)	ng at your property?	
	• Garage	No	
	Allocated parking space	No	
	• Driveway	No	
	Shared parking	No	
	On street	Yes	
	Resident permit	No	
	Metered Parking	No	
	Other (please specify):		
4.	Conservation area		
	Is your property in a designated Conspecial architectural or historical into which it is desirable to preserve or en	erest, the character or appea	ea of No nrance of

5.	Listed buildings			
	Is your property a Listed Building, or contained within one (that is a building recognised and approved as being of special architectural or historical interest)?	No		
6.	Alterations/additions/extensions			
a.	(i) During your time in the property, have you carried out any structural alterations, additions or extensions (for example, provision of an extra bath/shower room, toilet, or bedroom)?	No		
	If you have answered yes, please describe below the changes which you have made:			
	(ii) Did you obtain planning permission, building warrant, completion certificate and other consents for this work?			
	If you have answered yes, the relevant documents will be needed by the purchaser and you should give them to your solicitor as soon as possible for checking.			
	If you do not have the documents yourself, please note below who has these documents and your solicitor or estate agent will arrange to obtain them:			
b.	Have you had replacement windows, doors, patio doors or double glazing installed in your property?	Yes		
	If you have answered yes, please answer the three questions below:			
	(i) Were the replacements the same shape and type as the ones you replaced?	Yes		
	(ii) Did this work involve any changes to the window or door openings?	No		
	(iii) Please describe the changes made to the windows doors, or patio doors (with approximate dates when the work was completed):			
	Please give any guarantees which you received for this work to your solicito agent.	r or estate		
	Don't know			
7.	Central heating			
a.	Is there a central heating system in your property? (Note: a partial central heating system is one which does not heat all the main rooms of the property — the main living room, the bedroom(s), the hall and the bathroom).	Yes		
	If you have answered yes or partial – what kind of central heating is there? (Examples: gas-fired, solid fuel, electric storage heating, gas warm air).			
1				

	Gas				
	If you have answered yes, please answer the three questions below:				
	i) When was your central heating system or partial central heating system installed? 80's ?				
	(ii) Do you have a maintenand	ce contract for the cent	ral heating system?	No	
	If you have answered yes, please give details of the company with which you have a maintenance contract:				
	(iii) When was your maintena (Please provide the month ar		ewed?		
8.	Energy Performance Certification	ate			
	Does your property have an than 10 years old?	Energy Performance Co	ertificate which is less	No	
9.	Issues that may have affected your property				
a.	Has there been any storm, flood, fire or other structural damage to the property while you have owned it?		No		
	If you have answered yes, is insurance claim?	the damage the subjec	t of any outstanding		
b.	Are you aware of the existen	ce of asbestos in your	property?	No	
	If you have answered yes, please give details:				
10.	Services				
a.	Please tick which services ar supplier:	e connected to your pr	operty and give details o	of the	
	Services	Connected	Supplier		
	Gas or liquid petroleum gas	Yes	British Gas		
	Water mains or private water supply	Yes	Scottish Water		
	Electricity	Yes	British Gas		
	Mains drainage	Yes	Local Authority		
	Telephone	No			

	Cable TV or satellite	No	
	Broadband	No	
b.	Is there a septic tank system	em at your property?	No
	If you have answered yes,	please answer the two questions below:	
	(i) Do you have appropriat tank?	e consents for the discharge from your septic	
	(ii) Do you have a mainten	ance contract for your septic tank?	
	If have answered yes, deta maintenance contract:	ails of the company with which you have a	
11.	Responsibilities for share	d or common areas	
a.		sponsibility to contribute to the cost of anything repair of a shared drive, private road, a?	No
	If you have answered yes	s, please give details:	
b.	Is there a responsibility t roof, common stairwell o	to contribute to repair and maintenance of the or other common areas?	Not Applica ble
	If you have answered yes	s, please give details:	
C.	Has there been any major during the time you have	repair or replacement of any part of the roof owned the property?	No
d.		walk over any of your neighbours'property — our rubbish bin or to maintain your	No
	If you have answered yes	s, please give details:	
е.		do any of your neighbours have the right to for example to put out their rubbish bin or to s?	No
	If you have answered yes	s, please give details:	
f.	your property? (public ri	is there a public right of way across any part of ght of way is a way over which the public has a not the land is privately-owned.)	No
	If you have answered yes	, who are with a detailer	

12.	Charges associated with the property			
а.	Is there a factor or property manager for your property? If you have answered yes, please provide the name and address, and	No		
b.	give details of any deposit held and approximate charges: Is there a common buildings insurance policy?	Don't		
	If you have answered yes, is the cost of the insurance included in monthly/annual factor's charges?	know		
C.	Please give details of any other charges you have to pay on a regular ba upkeep of common areas or repair works, for example to a residents' as or maintenance or stair fund.			
13.	Specialist work			
a.	As far as you are aware, has treatment of dry rot, wet rot, damp or any other specialist work ever been carried out to your property?	Yes		
	If you have answered yes, please say what the repairs were for, whether you carried out the repairs (and when) or if they were done before you bought the property.			
	Mother got wood treatment guaranteed for 30 years			
b.	As far as you are aware, has any preventative work for dry rot, wet rot, or damp ever been carried out to your property?	Yes		
	If you have answered yes, please give details:			
	Wood treatment with 30 year guarantee approx 20 years ago			
C.	If you have answered yes to 13(a) or (b), do you have any guarantees relating to this work?	Yes		
	If you have answered yes, these guarantees will be needed by the purchaser and should be given to your solicitor as soon as possible for checking. If you do not have them yourself please write below who has these documents and your solicitor or estate agent will arrange for them to be obtained. You will also need to provide a description of the work carried out. This may be shown in the original estimate.			
	Guarantees are held by: Unsure			
14.	Guarantees			
a.	Are there any guarantees or warranties for any of the following?			
	(i) Electrical work	No		

	(iii) Central heating	No		
	(iv) National House Building Council (NHBC)	No		
	(v) Damp course	No		
	(vi) Any other work installations? (for example, cavity wall installation, underpinning, indemnity policy)	No		
b.	If you have answered 'yes' or 'with title deeds', please give details of the installations to which the guarantee(s) relate(s):	e work or		
c.	Are there any outstanding claims under any of the guarantees listed above? If you have answered yes, please give details:	No		
15.	Boundaries			
	So far as you are aware, has any boundary of your property been moved in thelast 10 years?	No		
	If you have answered yes, please give details:			
16.	Notices that affect your property			
	In the past three years have you ever received a notice:			
a.	advising that the owner of a neighbouring property has made a planning application?	No		
b.	that affects your property in some other way?	No		
c.	that requires you to do any maintenance, repairs or improvements to your property?	No		
	If you have answered yes to any of a-c above, please give the notices to yo or estate agent, including any notices which arrive at any time before the d of the purchaser of your property.			

Declaration by the seller(s)/or other authorised body or person(s)

I/We confirm that the information in this form is true and correct to the best of my/our knowledge and belief

Name(s): Euan Dunn

Date: 17/03/2025

shepherd.co.uk





Home Report

Valuation Report

Executory Valuation

Tax Valuations

Separation Valuation

Private Sale Valuation

New Build & Plot Valuation

Insurance Reinstatement Valuation

Portfolio Valuation

Rental Valuation

Drive By & Desktop Valuation

Energy Performance Certificate (EPC)

Level Two Survey & Valuation Report

Level Two Condition Report

Expert Witness Report





Commercial Valuation

Commercial Agency

Acquisitions Consultancy

Commercial Lease Advisory

Rent Reviews

Asset Management

Development Appraisals & Consultancy

Auctions

Property Management

Professional Services

Licensed Trade & Leisure

Expert Witness Report

Rating

Property Investment

Public Sector



PROPERTY & CONSTRUCTION CONSULTANTS



Quantity Surveying

Building Surveying

Project Management

Dispute Resolution Support Services

Principal Designer

Clerk of Works

Commercial EPC

Health & Safety Management

Employer's Agent

Energy Consultancy

Housing Partnerships

Housing Consultancy

Development Monitoring

Mediation Services

Aberdeen

△▲△ 01224 202800 △ △ 0131 663 2780

Ayr △ △ 01292 267987

Bearsden △▲ 0141 611 1500

Belfast

▲ 02890 912975

Birmingham **△** 0121 270 2266

Coatbridge △▲ 01236 436561

Cumbernauld △ △ 01236 780000 Dalkeith

Dumbarton

△ ▲ 01389 731682

Dumfries

△▲△ 01387 264333

Dundee

△▲ 01382 200454

△ 01382 220699

Dunfermline

△▲ 01383 722337 △ 01383 731841

East Kilbride

△▲ 01355 229317

Edinburgh

△ 0131 557 9300

Elain

△ ▲ 01343 553939

Falkirk

△△ 01324 635 999

Fraserburgh

△ ▲ 01346 517456

Galashiels

△△ 01896 750150

Glasgow △△△ 0141 331 2807

Glasgow South △ ▲ 0141 649 8020 **Glasgow West End** △ ▲ 0141 353 2080

Greenock

△▲01475 730717

Hamilton △▲01698 891400

Inverness △△△01463 712239

Kilmarnock

△△01563 520318

Kirkcaldy △ △ 01592 205442

Lanark △△01555 663058 Leeds

△ 0113 322 5069

Livingston △▲ 01<u>506 41677</u>7

London

▲△ 02033 761 236

Montrose

△△ 01674 676768

Musselburgh △ △ 0131 653 3456

Oban △▲ 01631 707 800

Paisley △△ 0141 889 8334 Perth

△△ 01738 638188 △ 01738 631631

Peterhead △△ 01779 470766

St Andrews △△ 01334 477773

△ 01334 476469

Saltcoats △ △ 01294 464228

Stirling

△△ 01786 450438 △ 01786 474476