

Home Report

16 Whytehouse Avenue
Kirkcaldy KY1 1UW

Date of Valuation: 06/08/2026

**UK Chartered Surveyors
and Property Consultants**

g-s.co.uk

Single Survey

Survey report on:

Property Address	16 Whytehouse Avenue Kirkcaldy KY1 1UW
Customer	Aaron and Frances Fimister
Prepared by	Graham + Sibbald Property Consultants Limited
Date of Inspection	06/08/2026

GRAHAM + SIBBALD

1. Information and Scope of Inspection

This section tells you about the type, accommodation, neighbourhood, age and construction of the property. It also tells you about the extent of the inspection and highlights anything that the surveyor could not inspect.

All references to visual inspection refer to an inspection from within the property without moving any obstructions and externally from ground level within the site and adjoining public areas. Any references to left or right in a description of the exterior of the property refer to the view of someone standing facing that part of the property from the outside.

The inspection is carried out without causing damage to the building or its contents and without endangering the occupiers or the surveyor. Heavy furniture, stored items and insulation are not moved. Unless identified in the report the surveyor will assume that no harmful or hazardous materials or techniques have been used in the construction. The presence or possible consequences of any site contamination will not be researched.

Services such as TV/cable connection, internet connection, swimming pools and other leisure facilities etc. will not be inspected or reported on.

Description	The subjects comprise a two storey semi-detached house with single storey rear projection.
--------------------	--

Accommodation	On Ground Floor: Entrance Vestibule, Entrance Hallway, Living Room, Dining Room/Bedroom 4, Kitchen, WC Compartment and Rear Porch. On Half Landing: Bathroom with WC. On Upper Floor: Landing and three Bedrooms.
----------------------	---

Gross Internal Floor Area (m²)	117 sq m or thereby excl rear porch.
--	--------------------------------------

Neighbourhood and Location	The subjects are located in an established mixed residential/commercial district of Kirkcaldy, close to the town centre, where surrounding properties are of mixed age and character. Local shopping and public transport amenities are available nearby.
-----------------------------------	---

Age (Year Built)	The subjects are thought to have been constructed around 1905.
-------------------------	--

Weather	Dry, part dull and part sunny.
----------------	--------------------------------

Chimney Stacks	The chimney stack is of pointed stone construction with mortar flashings. Chimney pots have been added. Visually inspected with the aid of binoculars where appropriate.
-----------------------	--

Roofing including Roof Space	The main roof is of pitched timber Dutch barn styling and slated. There is some lead and zinc detailing. The roof over the rear kitchen projection is single pitched and overlaid with slates. Access to the roof space is via a ceiling hatch with associated drop down ladder located off the landing. The roof frame is generally unfloored with insulation materials laid between and over ceiling joists. It accommodates a redundant cold water storage tank. Sloping roofs were visually inspected with the aid of binoculars where appropriate. Roof spaces were visually inspected and were entered where there was safe and reasonable access, normally defined as being from a 3m ladder within the property. If this is not possible, then physical access to the roof space may be taken by other means if the Surveyor deems it safe and reasonable to do so.
-------------------------------------	---

Rainwater Fittings	Rainwater units are run in a mixture of cast iron and PVC materials. Visually inspected with the aid of binoculars where appropriate.
---------------------------	---

Main Walls	The main walls are of pointed solid stone construction. Visually inspected with the aid of binoculars where appropriate. Foundations and concealed parts were not exposed or inspected.
-------------------	---

Windows, External Doors and Joinery	Window units are of mixed ages and opening styles being predominantly uPVC framed and of predominantly sash and casement styling. There is a retained timber framed, single glazed sash and casement window within the dining room/fourth bedroom. The property is accessed to the front by a timber panelled storm door with glazed fanlight over and thereafter via a timber glazed inner door. The rear door from the kitchen is of replacement composite part double glazed stable door styling. Internal and external doors were opened and closed where keys were available. Random windows were opened and closed where possible. Doors and windows were not forced open.
--	--

External Decorations	External decorations are of painted and uPVC finishes. Visually inspected.
-----------------------------	--

Conservatories / Porches	There is a porch to the rear of the property, this being of lean-to construction with pointed blockwork base walls surmounted by timber single glazed window units. The roof over is of single pitched timber and glazed design. The porch is accessed via a timber single glazed door. Visually inspected.
---------------------------------	---

Communal Areas	Not applicable.
-----------------------	-----------------

Garages and Permanent Outbuildings	There is no garage nor garage space. There are no permanent outbuildings.
---	---

Outside Areas and Boundaries	There are private front, side and rear garden grounds, the subjects occupying an elevated plot accessed to the front by external steps. Boundaries are formed by a mixture of brick, stone and blockwork walling, this having a part pointed, part rendered finish and being part retaining in nature. There is some further garden fencing. There is a roller shutter door within the rear boundary wall providing access to an area of part paved off-street parking within the rear garden. Garden grounds are generally laid out with a mixture of grass, chips, paving and borders. There is a timber shed to the rear of the property. Visually inspected.
-------------------------------------	--

Ceilings	Ceilings appear to be a mixture of lath and plaster and plasterboard materials. Visually inspected from floor level.
-----------------	--

Internal Walls	Internal walls are plastered and plasterboard lined. Visually inspected from floor level. Using a moisture meter, walls were randomly tested for dampness where considered appropriate.
-----------------------	--

Floors Including Sub-Floors	Flooring at entry level is predominantly of suspended timber construction however there are apparent solid floors within the kitchen and vestibule. Upper flooring is of suspended timber construction. There is no readily accessible sub-floor hatch and hence no sub-floor area inspection could be undertaken. Surfaces of exposed floors were visually inspected. No carpets or floor coverings were lifted. Sub-floor areas were inspected only to the extent visible from a readily accessible and unfixed hatch by way of an inverted "head and shoulders" inspection at the access point. Physical access to the sub floor area may be taken if the Surveyor deems it is safe and reasonable to do so , and subject to a minimum clearance of 1m between the underside of floor joists and the solum as determined from the access hatch.
------------------------------------	---

Internal Joinery and Kitchen Fittings	Internal joinery is of timber with timber internal pass doors, the inner vestibule door incorporating a glazed insert. The kitchen is fitted with floor and wall mounted storage units. There is a timber feature staircase. Built-in cupboards were looked into but no stored items were moved. Kitchen units were visually inspected excluding appliances.
--	---

Chimney Breasts and Fireplaces	There are chimney breasts in the living room and dining room/bedroom 4, and also presumably, within the gable elevation bedrooms. The majority of fireplace openings have been removed/blocked over and a gas fire has been installed within a decorative fireplace in the living room. Visually inspected. No testing of the flues or fittings was carried out.
---------------------------------------	--

Internal Decorations	Internal decoration is a mixture of papered, painted, textured, tiled and decorative lined finishes. Visually inspected.
-----------------------------	--

Cellars	Not applicable.
----------------	-----------------

Electricity	Mains supply. The electrical switch gear is located within a cupboard in the living room with meter adjacent. Accessible parts of the wiring were visually inspected without removing fittings. No tests whatsoever were carried out to the system or appliances. Visual inspection does not assess any services to make sure they work properly and efficiently and meet modern standards. If any services are turned off, the surveyor will state that in the report and will not turn them on.
--------------------	---

Gas	Mains supply. The gas meter is located externally within a box mounted on the rear-most rear garden wall. Accessible parts of the system were visually inspected without removing fittings. No tests whatsoever were carried out to the system or appliances. Visual inspection does not assess any services to make sure they work properly and efficiently and meet modern standards. If any services are turned off, the surveyor will state that in the report and will not turn them on.
------------	---


Water, Plumbing and Bathroom Fittings	Mains water supply. Where seen, plumber work is formed mainly in a mixture of copper and PVC materials. There is a section of lead waste visible beneath the bathroom, as viewed from the hallway. Given the age of the property, there is potential for further lead plumber work to exist in concealed areas. The stopcock is located within the kitchen. There is an external water tap. The WC compartment comprises wash-hand basin and low level WC. The bathroom comprises a three piece suite with shower apparatus over the bath. Accessible parts of the system were visually inspected without removing fittings. No tests whatsoever were carried out to the system or appliances. Visual inspection does not assess any services to make sure they work properly and efficiently and meet modern standards. If any services are turned off, the surveyor will state that in the report and will not turn them on. It should be appreciated that concealed areas beneath and around baths and shower trays could not be inspected. Water spillage in these areas can result in dampness/decay and no comment can be made on inaccessible areas. Waterproof seals in sanitary areas should be checked and maintained on a regular basis.
Heating and Hot Water	There is a wall mounted condensing gas fired combination central heating boiler located within the kitchen. This supplies steel panelled radiators and also provides domestic hot water. There is a heated towel rail within the bathroom. Accessible parts of the system were visually inspected apart from communal systems, which were not inspected. No tests whatsoever were carried out to the system or appliances.
Drainage	All foul and surface water drainage is assumed to be connected to the main public sewer. Drainage covers etc were not lifted. Neither drains nor drainage systems were tested.

Fire, Smoke and Burglar Alarms

New smoke alarm standards were introduced in Scotland in February 2022 and it is likely that some properties may require additional works to meet these standards. In instances where alarms are in place, no tests whatsoever have been carried out and we cannot confirm if the system complies with the most recent regulations. Any potential purchaser should satisfy themselves as to whether the current system meets with regulations or otherwise.

Additional limits to Inspection	It is outwith the scope of this inspection to determine whether or not asbestos based products are present within the property. Asbestos was widely used in the building industry until around 1999, when it became a banned substance. If you have any concerns you should engage the services of a qualified asbestos surveyor. No inspection for Japanese Knotweed was carried out and unless otherwise stated for the purpose of this report, it is assumed that there is no Japanese Knotweed within the boundaries of the property or neighbouring properties. A restricted inspection was possible only of the roof space due to accessibility, insulation materials and/or storage items. Our inspection was restricted to the exposed and accessible surface fabric. It should be appreciated that the Home Report inspection is a non-disruptive visual inspection of the property as at the date of inspection and that we are unable to inspect parts of the property which are concealed or covered by floor coverings or contents in place at that time. Once vacant, defects may be apparent that could not be detected during our survey. Changing weather conditions can also affect aspects of the property which would not be apparent at the time of inspection. Due to fitted carpets and floor coverings no detailed inspection was possible of the floor timbers and accordingly we cannot guarantee their soundness or otherwise. Restricted inspection in cupboards due to storage items. The inspections of garden walls and of a section of the kitchen projection were restricted by vegetation growths. At the time of inspection the subjects were occupied, furnished and some floors were covered. The services were not tested. There is no readily accessible sub-floor hatch and hence no sub-floor area inspection could be undertaken. A restricted inspection was possible only of the roof and chimney from ground level.
--	---

Sectional diagram showing elements of a typical house

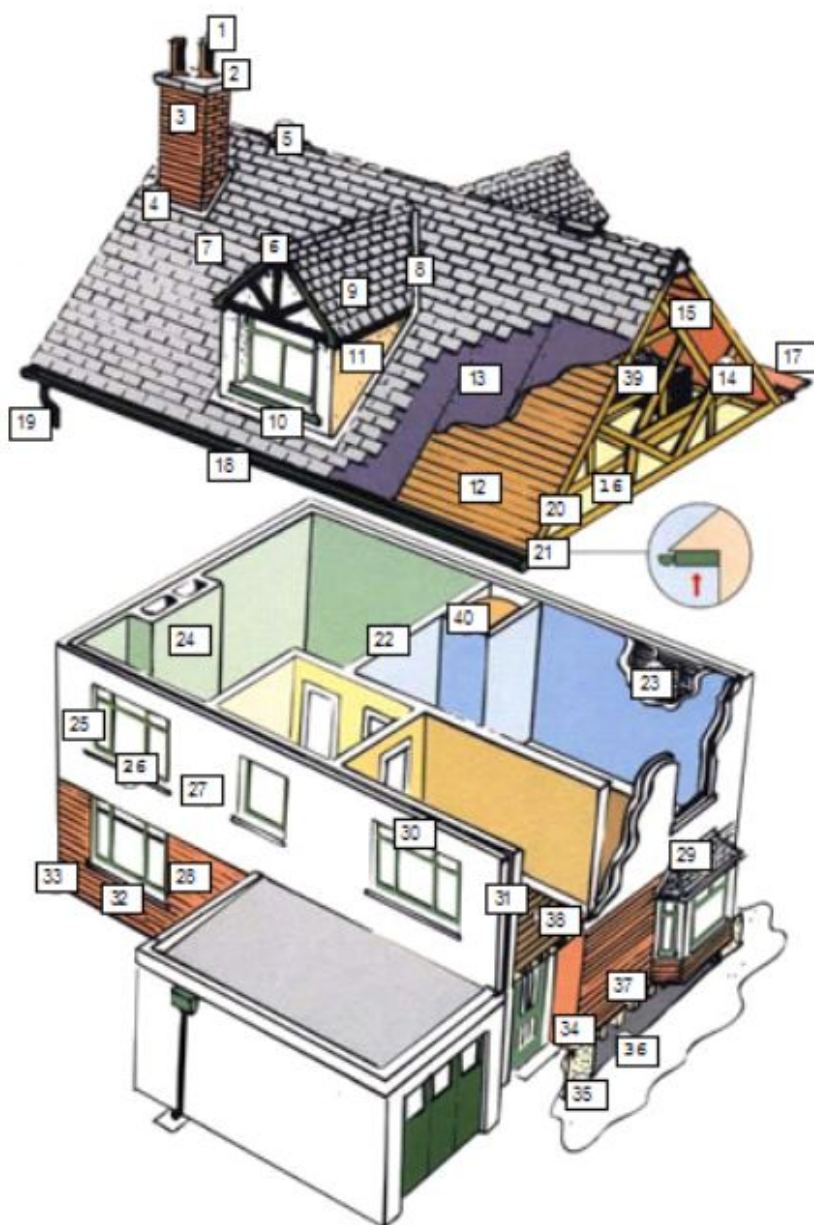

1	Chimney pots
2	Coping stone
3	Chimney head
4	Flashing
5	Ridge ventilation
6	Ridge board
7	Slates / tiles
8	Valley guttering
9	Dormer projection
10	Dormer flashing
11	Dormer cheeks
12	Sarking
13	Roof felt
14	Trusses
15	Collar
16	Insulation
17	Parapet gutter
18	Eaves guttering
19	Rainwater downpipe
20	Verge boards / skews
21	Soffit boards
22	Partition wall
23	Lath / plaster
24	Chimney breast
25	Window pointing
26	Window sills
27	Rendering
28	Brickwork / pointing
29	Bay window projection
30	Lintels
31	Cavity walls / wall ties
32	Subfloor ventilator
33	Damp proof course
34	Base course
35	Foundations
36	Solum
37	Floor joists
38	Floorboards
39	Water tank
40	Hot water tank

Reference may be made in this report to some or all of the above component parts of the property. This diagram may assist you in locating and understanding these items.

2. Condition

This section identifies problems and tells you about the urgency of any repairs by using one of the following three categories:

Category 3	Category 2	Category 1
Urgent repairs or replacement are needed now. Failure to deal with them may cause problems to other parts of the property or cause a safety hazard. Estimates for repairs or replacement are needed now.	Repairs or replacement requiring future attention, but estimates are still advised.	No immediate action or repair is needed.

	Structural Movement
Repair Category	1
Notes	There is evidence of settlement in the building noted both internally and externally but this is not inconsistent with a property of this age and type and on the basis of a single inspection appears to be longstanding.

	Dampness, Rot and Infestation
Repair Category	2
Notes	Some higher than average moisture readings were recorded to wall surfaces within the property. Further moisture readings were recorded to the lintel around the front main entrance door and to the hallway ceiling. There are pin holes to roof space timbers indicative of infestation by wood boring insect. There is the potential for further related issues to exist in concealed areas. It is recommended that a reputable timber/damp specialist firm be employed to carry out a detailed inspection of the entire subjects and thereafter implement all necessary remedial works under cover of long term guarantee.

	Chimney Stacks
Repair Category	2

Notes	There is weathering to chimney stonework and some deterioration to pointing. It should be appreciated that this is of an age where ongoing maintenance will be required, particularly to flashing details to ensure water tightness.
-------	--

	Roofing including Roof Space
Repair Category	2
Notes	Although the kitchen roof is understood to have been re-slatted around 2019, there are nonetheless some slipped, chipped and localised missing slates to roof coverings. Some deterioration was noted to metal roof detailing and also to the roof skews. The skylight is dated and corroded. The roof covering is now of an age where ongoing and regular maintenance will be required and it would be prudent to seek the advice of a roofing contractor to comment on its current condition and expected lifespan. The extractor fan ductwork relating to the bathroom is no longer connected to the outside area and requires repair/reconnection.

	Rainwater Fittings
Repair Category	3
Notes	There is a missing downpipe hopper at the front elevation. There is a further missing downpipe to the rear kitchen projection. Reinstatement of fittings is required. Corroded rainwater units were noted and there are sections of choked guttering. Corrosion can result in leakage. Some slate debris and moss/vegetation requires to be cleared from guttering. Attention is required to areas of the rainwater goods system where deterioration has occurred.

	Main Walls
Repair Category	2

Notes	External stonework is weathered and cracked in places, displaying some defective pointing. There is some cracking through external sills. The external ground level is high in relation to some of the sub-floor ventilators and should be lowered. A general building contractor can inspect and advise accordingly with a view to carrying out any necessary associated repair works. Repairs in these regards should be envisaged as part of an ongoing maintenance programme. Creeper growths can cause and conceal defects and should be removed.
-------	--

	Windows, External Doors and Joinery
Repair Category	2
Notes	There is an apparent failed window unit seal in the bathroom causing condensation to form between the panes. The dining room/fourth bedroom window is sealed shut and displays snapped sash cords. This requires to be repaired/freed up. Windows can be problematic and over time the operation of the windows can be affected and opening mechanisms damaged. It is therefore likely that maintenance/repair will be required as part of an ongoing maintenance programme. There is general weathering to the main external front door.

	External Decorations
Repair Category	2
Notes	The external decoration is weathered and an overhaul should be expected.

	Conservatories / Porches
Repair Category	3
Notes	The rear porch is in poor condition, displaying defective and poorly supported glazing together with rotted timbers. This requires to be substantially rebuilt or removed by a competent contractor.



Communal Areas

Repair Category

Notes

Not applicable.



Garages and Permanent Outbuildings

Repair Category

Notes

Not applicable.



Outside Areas and Boundaries

Repair Category

2

Notes

Evidence of movement was noted to have affected the boundary walls observed in the form of cracking/open joints. There are sections of loose and defective brick and stonework and also of damaged render. A monitoring and maintenance/repair programme will be required to walls, including to retaining walling. Repairs in this regard can prove costly.

The roller shutter door set within the rear boundary requires adjustment/servicing to ensure satisfactory performance. The surrounds and canopy over this door are rotted and require further overhaul/repair.

Garden grounds are overgrown. Outside areas will require ongoing repairs and maintenance.

The boundaries appear reasonably well defined. Regular maintenance will be required. You should verify with your conveyancer the extent of the boundaries attaching to the property.



Ceilings

Repair Category

2

Notes	The inner hallway ceiling is part damaged following advised repairs to rectify a bathroom leak. Reinstatement works will be required. Elsewhere, cracking and blemishes have occurred and some plaster repairs may be required. Some decorative surfaces are finished with an Artex type product. Early forms of Artex may incorporate small amounts of asbestos based bonding materials and therefore specialist advice should be obtained prior to working on these areas to minimise the risk of releasing hazardous fibres.
-------	--

	Internal Walls
Repair Category	2
Notes	Within the limits of our inspection these generally appeared in fair condition consistent with age. During redecoration some plaster filling/repair may be required. There is some localised damage to wall surfaces requiring repair.

	Floors including Sub-Floors
Repair Category	2
Notes	There are sections of creaking/worn and part damaged flooring requiring overhaul/repair. Older style linoleum floor coverings within a hallway cupboard may contain encapsulated asbestos fibres within their construction.

	Internal Joinery and Kitchen Fittings
Repair Category	2

Notes	Some seals to kitchen fittings are defective. This may have caused damage to timbers which are hidden and may need repair. The kitchen units are of a semi modern type. Consistent with age and usage, wear and tear was noted to sections of the cabinetry. It is therefore recognised that incoming purchasers may opt to modernise to suit individual tastes and requirements. The door to the WC compartment would not comply with current Building Regulations. The internal joinery is showing some signs of wear and tear and upgrading during routine decoration is thought necessary.
-------	--

	Chimney Breasts and Fireplaces
Repair Category	2
Notes	The gas fire bears a safety advisory sticker prohibiting further use. The gas fire is not, however, believed to be capped off. A Gas Safe registered heating engineer can provide further advice in this regard. Blocked fireplaces should be vented to prevent condensation and/ or dampness developing.

	Internal Decorations
Repair Category	1
Notes	The property is reasonably decorated although it is recognised that on taking occupancy, homeowners will likely consider redecoration or refurbishment to suit individual tastes and requirements.

	Cellars
Repair Category	
Notes	Not applicable.



Electricity

Repair Category**2****Notes**

Damage was noted to a hallway downlighter fitting where the ceiling has been cut open following repairs to the bathroom. There is a loose hanging wall light within the hallway. Associated repairs are required.

There are older sockets and switches within the property and there are some skirting-mounted sockets which would not comply with current Regulations.

The electrical installation is of mixed age and includes a number of older sections. It will be necessary to have the installation checked by a suitably qualified electrician and upgraded as necessary.

The Institution of Engineering and Technology recommends that inspections and testing are undertaken at least every ten years and on a change of occupancy. It should be appreciated that only the most recently constructed or re-wired properties will have installations which fully comply with IET regulations.



Gas

Repair Category**2****Notes**

The smart gas meter is located some distance from the property and is understood to require replacement.

In the interest of safety all gas appliances should be checked by a Gas Safe Registered Engineer.



Water, Plumbing and Bathroom Fittings

Repair Category**2**

Notes	There is a leak at the kitchen sink requiring repair by a plumbing contractor. There is some lead plumber work visible within the property with the potential for further older sections to exist in concealed areas. It would be prudent to budget for upgrading in conjunction with other modernisation costs. The sanitary fittings appeared in fair order consistent with age. Where plumbing and fittings appear to be of copper/PVC piping, these appeared in serviceable condition but were not tested. It should be appreciated that concealed areas beneath and around baths and shower trays could not be inspected. Water spillage in these areas can result in dampness/decay and no comment can be made on inaccessible areas. Waterproof seals in sanitary areas should be checked and maintained on a regular basis.
-------	--

	Heating and Hot Water
Repair Category	2
Notes	There is some corrosion to the heated towel rail within the bathroom and the need for ongoing maintenance should therefore be anticipated. There is a gas fired central heating system and gas fittings and these should all be checked and serviced in the normal manner. In the interests of safety it would be prudent to have all gas appliances checked by a Gas Safe registered tradesperson.

	Drainage
Repair Category	1
Notes	The property is thought to be connected to a main sewer. There was no surface evidence to suggest the system is choked or leaking.

Set out below is a summary of the condition of the property which is provided for reference only. You should refer to the previous comments for detailed information.

Structural Movement	1
Dampness, Rot and Infestation	2
Chimney stacks	2
Roofing including Roof Space	2
Rainwater Fittings	3
Main Walls	2
Windows, External Doors and Joinery	2
External Decorations	2
Conservatories / Porches	3
Communal Areas	
Garages and Permanent Outbuildings	
Outside areas and Boundaries	2
Ceilings	2
Internal Walls	2
Floors including Sub-Floors	2
Internal Joinery and Kitchen Fittings	2
Chimney Breasts and Fireplaces	2
Internal Decorations	1
Cellars	
Electricity	2
Gas	2
Water, Plumbing and Bathroom Fittings	2
Heating and Hot Water	2
Drainage	1

Category 3

Urgent repairs or replacement are needed now. Failure to deal with them may cause problems to other parts of the property or cause a safety hazard. Estimates for repairs or replacement are needed now.

Category 2

Repairs or replacement requiring future attention, but estimates are still advised.

Category 1

No immediate action or repair is needed.

Remember

The cost of repairs may influence the amount someone is prepared to pay for the property. We recommend that relevant estimates and reports are obtained in your own name.

Warning

If left unattended, even for a relatively short period, Category 2 repairs can rapidly develop into more serious Category 3 repairs. The existence of Category 2 or Category 3 repairs may have an adverse effect on marketability, value and the sale price ultimately achieved for the property. This is particularly true during slow market conditions where the effect can be considerable.

3. Accessibility Information

Guidance Notes on Accessibility Information

Three steps or fewer to a main entrance door of the property: In flatted developments the 'main entrance' would be the flat's own entrance door, not the external door to the communal stair. The 'three steps or fewer' are counted from external ground level to the flat's entrance door. Where a lift is present, the count is based on the number of steps climbed when using the lift.

Unrestricted parking within 25 metres: For this purpose, 'Unrestricted parking' includes parking available by means of a parking permit. Restricted parking includes parking that is subject to parking restrictions, as indicated by the presence of solid yellow, red or white lines at the edge of the road or by a parking control sign, parking meters or other coin-operated machines.

1. Which floor is the living accommodation on?	Ground, Half Landing and First Floor.		
2. Are there three steps or fewer to a main entrance to a property?	Yes	☒	No ☐
3. Is there a lift to the main entrance door of the property?	Yes	☐	No ☒
4. Are all door openings greater than 750mm?	Yes	☐	No ☒
5. Is there a toilet on the same level as the living room and kitchen?	Yes	☒	No ☐
6. Is there a toilet on the same level as a bedroom?	Yes	☒	No ☐
7. Are all rooms on the same level with no internal steps or stairs?	Yes	☐	No ☒
8. Is there unrestricted parking within 25 metres of an entrance door to the building?	Yes	☒	No ☐

4. Valuation and Conveyance Issues

This section highlights information that should be checked with a solicitor or licensed conveyancer. It also gives an opinion of market value and an estimated cost for insurance purposes.

Matters for a Solicitor or Licensed Conveyancer

We are unaware of any adverse planning proposals affecting the subjects although this should be confirmed by obtaining a Property Enquiry Certificate.

Absolute Ownership assumed. We are unaware of any easements, servitudes or rights of way which may adversely affect the property. This point should be confirmed by reference to the Title Deeds.

It is recommended that where repairs, defects or maintenance items have been identified, particularly categorised as a 2 or 3, interested parties make appropriate enquiries in order to satisfy themselves of potential costs and the extent of the works required prior to submitting a legal offer to purchase.

We assume that the carriageways etc., ex adverso the subjects are the responsibility of the Local Authority.

The subjects are accessed to the rear via a private lane over which there is understood to be a Right of Way. The conveyancer can verify whether all legal arrangements are adequate.

The subjects are understood to be located within a Conservation Area which may have implications for future maintenance/repairs and insurance. Further details can be confirmed legally.

The valuation is made on the assumption that any alterations that may have been carried out to the property satisfy all relevant legislation and have full certification where appropriate. While not necessarily an exhaustive list, alterations noted at the time of our inspection include the removal of a hallway cupboard and associated wall for the purposes of creating alternative hallway access to the kitchen; the formation of a WC compartment off the hallway at ground floor level; the installation of replacement double glazed window units and doors and the installation of an attic hatch with associated drop down ladder involving the cutting and re-siting of roof structure timbers.

The conveyancer should obtain copies of any documentation and associated guarantees relating to past kitchen roof re-slating works.

Estimated Reinstatement Cost for Insurance Purposes

£565,000

It is assumed that insurance cover is obtainable on normal terms. The guidance figure is the estimate of costs for reinstating the subjects as at the date of inspection based on information provided by the Building Cost Information Service (BCIS). It is recommended that this figure is kept under regular review to ensure that you have adequate insurance cover. We are of the opinion that the subjects should be insured for buildings reinstatement purposes for a sum of not less than £565,000 (FIVE HUNDRED AND SIXTY-FIVE THOUSAND POUNDS STERLING).

Valuation and Market Comments	£225,000
-------------------------------	----------

We are of the opinion that the market value of the subjects all as previously described and on a vacant possession basis would be fairly stated in the region of £225,000 (TWO HUNDRED AND TWENTY-FIVE THOUSAND POUNDS STERLING).

Report Author	Zoe C M Gardner MA (Hons) MRICS
---------------	---------------------------------

Address	Suite B3, Carlyle House, Carlyle Road, Kirkcaldy, KY1 1DB
---------	---

Signed	
Name and Qualification	Zoe C M Gardner MA (Hons) MRICS For and on behalf of Graham + Sibbald

Date of Report	13/8/2026
----------------	-----------

TERMS AND CONDITIONS OF SINGLE SURVEY

GENERAL

1.1 The Surveyors

The Seller has engaged the Surveyors to provide the Report and a Generic Mortgage Valuation Report for Lending Purposes. The Seller has also engaged the Surveyors to provide an Energy Report in the format prescribed by the accredited energy company.

The Surveyors are authorised to provide a transcript or retype of the Generic Mortgage Valuation Report on to Lender specific pro-forma. Transcript reports are commonly requested by brokers and lenders. The transcript report will be in the format required by the Lender but will contain the same information, inspection date and valuation figure as the Generic Mortgage Valuation Report and the Report. The Surveyors will decline any transcript request which requires the provision of information additional to the information in the Report and the Generic Mortgage Valuation Report until the Seller has conditionally accepted an offer to purchase made in writing.

Once the Seller has conditionally accepted an offer to purchase made in writing, the Lender or conveyancer may request that the Surveyors provide general comment on standard appropriate supplementary documentation. In the event of a significant amount of documentation being provided to the Surveyors, an additional fee may be incurred by the Purchaser. Any additional fee will be agreed in writing.

If information is provided to the Surveyors during the conveyancing process which materially affects the valuation stated in the Report and Generic Mortgage Valuation Report, the Surveyors reserve the right to reconsider the valuation. Where the Surveyors are required to amend the valuation in consequence of such information, they will issue an amended Report and Generic Mortgage Valuation Report to the Seller. It is the responsibility of the Seller to ensure that the amended Report and Generic Mortgage Valuation Report are transmitted to every prospective Purchaser.

The individual Surveyor will be a member of the Royal Institution of Chartered Surveyors who is competent to survey, value and report upon residential property. *

If the Surveyors have had a previous business relationship within the past two years with the Seller or Seller's agent or relative to the Property, they will be obliged to indicate this in the adjacent box. ☒ Yes

The Surveyors have a written complaints handling procedure. This is available from the offices of the Surveyors at the address stated.

* Which shall be in accordance with the current RICS Appraisal and Valuation Standards (The Red Book) and RICS Rules of Conduct.

1.2 The Report

The Surveyors will not provide an amended Report on the Property, except to correct factual inaccuracies.

The Report will identify the nature and source of information relied upon in its preparation.

The Surveyor shall provide a Market Value of the Property, unless the condition of the Property is such that it would be inappropriate to do so. A final decision on whether a loan will be granted rests with the Lender who may impose retentions in line with their lending criteria. The date of condition and value of the property will be the date of inspection.

Prior to the 1st of December 2008, Purchasers have normally obtained their own report from their chosen Surveyor. By contrast, a Report is instructed by the Seller and made available to all potential Purchasers in expectation that the successful Purchaser will have relied upon it. The Royal Institution of Chartered Surveyors rules require disclosure of any potential conflict of interest when acting for the Seller and the Purchaser in the same transaction. The Report may give rise to a conflict of interest and if this is of concern to any party they are advised to seek their own independent advice.

The Report and any expressions or assessments in it are not intended as advice to the Seller or Purchaser or any other person in relation to an asking price or any other sales or marketing decisions.

The Report is based solely on the Property and is not to be relied upon in any manner whatsoever when considering the valuation or condition of any other property.

If certain minor matters are mentioned in the Report it should not be assumed that the Property is free of other minor defects.

Neither the whole nor any part of the Report may be published in any way, reproduced or distributed by any party other than the Seller, prospective Purchasers and the Purchaser and their respective professional advisors without the prior written consent of the Surveyors.

1.3 Liability

The Report is prepared with the skill and care reasonably to be expected of a competent residential surveyor who is a member of the Royal Institution of Chartered Surveyors.

The Report is addressed to the Seller and is prepared in the expectation that it (or a complete copy) along with these Terms and Conditions (or a complete copy) would be (or, as the case might be, would have been) disclosed and delivered to:

- the Seller;
- any person(s) noting an interest in purchasing the Property from the Seller;
- any person(s) who make(s) (or on whose behalf is made) an offer to purchase the Property, whether or not that offer is accepted by the Seller;
- the Purchaser; and
- the professional advisors of any of these.

The Surveyors acknowledge that their duty of skill and care in relation to the Report is owed to the Seller and to the Purchaser. The Surveyors accept no responsibility or liability whatsoever in relation to the Report to persons other than the Seller and the Purchaser. The Seller and Purchaser should be aware that if a Lender seeks to rely on this Report they do so at their own risk. In particular, the Surveyors accept no responsibility or liability whatsoever to any Lender in relation to the Report. Any such Lender relies upon the Report entirely at their own risk.

Graham + Sibbald's total liability to the Client (and any third party relying upon this report) under this Agreement (including liability in contract, tort (including negligence), breach of statutory duty, or otherwise) shall be limited to the lower of the following : a) 25% of the valuation or b) £250,000.

1.4 Generic Mortgage Valuation Report

The Surveyors undertake to the Seller that they will prepare a Generic Mortgage Valuation Report, which will be issued along with the Report. It is the responsibility of the Seller to ensure that the Generic Mortgage Valuation Report is provided to every potential Purchaser.

1.5 Transcript Mortgage Valuation for Lending Purposes

The Surveyors undertake that on being asked to do so by a prospective Purchaser, or his/her professional advisor or Lender, they will prepare a Transcript Mortgage Valuation Report for Lending Purposes on terms and conditions to be agreed between the Surveyors and Lender and solely for the use of the Lender and upon which the Lender may rely. The decision as to whether finance will be provided is entirely a matter for the Lender. ** The Transcript Mortgage Valuation Report for Lending Purposes will be prepared from information contained in the Report and the Generic Mortgage Valuation Report.

** Which shall be in accordance with the current RICS Appraisal and Valuation Standards (The Red Book) and RICS Rules of Conduct.

1.6 Intellectual Property

All intellectual property rights whatsoever (including copyright) in and to the Report, excluding the headings and rubrics, are the exclusive property of the Surveyors and shall remain their exclusive property unless they assign the same to any other party in writing.

1.7 Payment

The Surveyors are entitled to refrain from delivering the Report to anyone until the fee and other charges for it notified to the Seller have been paid. Additional fees will be charged for subsequent inspections and Reports, including replacement home reports.

1.8 Cancellation

The Seller will be entitled to cancel the inspection by notifying the Surveyor's office at any time before the day of the inspection.

The Surveyor will be entitled not to proceed with the inspection (and will so report promptly to the Seller) if after arriving at the Property, the Surveyor concludes that it is of a type of construction of which the Surveyor has insufficient specialist knowledge to be able to provide the inspection satisfactorily. The Surveyor will also be entitled not to proceed if after arriving at the Property, the Surveyor concludes that the Property is exempt under Part 3 of The Housing (Scotland) Act 2006 as detailed in the (Prescribed Documents) Regulations 2008. If there is a potential threat to their health or personal safety, the inspection may be postponed or cancelled at the Surveyor's discretion.

In the case of cancellation or the inspection not proceeding, the Surveyor will refund any fees paid by the Seller for the inspection and Report, except for expenses reasonably incurred and any fee due in light of the following paragraph of this section.

In the case of cancellation by the Seller, for whatsoever reason, after the inspection has taken place but before a written report is issued, the Surveyor will be entitled to raise an Invoice equivalent to 80% of the agreed fee.

If our account details change, we will notify these to you by letter or face to face and never by email.

1.9 Precedence

If there is any incompatibility between these Terms and Conditions and the Report, these Terms and Conditions take precedence.

1.10 Definitions

- the "Lender" is the party who has provided or intends or proposes to provide financial assistance to the Purchaser towards the purchase of the Property and in whose favour a standard security will be granted over the Property;
- the "Transcript Mortgage Valuation Report for Lending Purposes" means a separate report, prepared by the Surveyor, prepared from information in the Report and the generic Mortgage Valuation Report, but in a style and format required by the Lender. The Transcript Mortgage Valuation Report for Lending Purposes will be prepared with the skill and care reasonably to be expected from a Surveyor who is a member of the Royal Institution of Chartered Surveyors and who is competent to survey, value and report on the Property;
- the "Generic Mortgage Valuation Report" means a separate report, prepared by the Surveyor from information in the Report but in the Surveyor's own format.
- the "Market Value" is the estimated amount for which the Property should exchange, on the date of valuation, between a willing seller and a willing buyer in an arm's length transaction after proper marketing where the parties had each acted knowledgeably, prudently and without compulsion;
- the "Property" is the property which forms the subject of the Report;
- the "Purchaser" is the person (or persons) who enters into a contract to buy the Property from the Seller;
- a "prospective Purchaser" is anyone considering buying the Property;
- the "Report" is the report, of the kind described in Part 2 of these Terms and Conditions and in the form set out in Part 1 of Schedule 1 of the Housing (Scotland) Act 2006 (Prescribed Documents) Regulations 2008;
- the "Seller" is/are the proprietor(s) of the Property;
- the "Surveyor" is the author of the Report on the Property;
- the "Surveyors" are Graham + Sibbald Property Consultants Limited, a limited company incorporated in Scotland (Registered Number SC837809) and having its registered office address at Seabraes House, 18 Greenmarket, Dundee, DD1 4QB, of which the Surveyor is an employee, director or member (unless the Surveyor is not an employee, director or member, when the "Surveyors" means the Surveyor) whose details are set out at the head of the Report; and

- the "Energy Report" is the advice given by the accredited energy company, based on information collected by the Surveyor during the Inspection, and also includes an Energy Performance Certificate, in a Government approved format.
- "Data Protection Legislation" means the UK Data Protection Legislation and any other European Union legislation relating to personal data and all other legislation and regulatory requirements in force from time to time which apply to a party relating to the use of personal data (including, without limitation, the privacy of electronic communications).
- "UK Data Protection Legislation" means all applicable data protection and privacy legislation in force from time to time in the UK including the UK GDPR; the Data Protection Act 2018; the Privacy and Electronic Communications Directive 2002/58/EC (as updated by Directive 2009/136/EC) and the Privacy and Electronic Communications Regulations 2003 (SI 2003/2426) as amended.
- "UK GDPR" has the meaning given to it in section 3(10) (as supplemented by section 205(4)) of the Data Protection Act 2018.

DESCRIPTION OF THE REPORT

2.1 The Service

The Single Survey is a Report by an independent Surveyor, prepared in an objective way regarding the condition and value of the Property on the day of the inspection, and who is a member of the Royal Institution of Chartered Surveyors. It includes an Energy Report as required by statute and this is in the format of the accredited energy company. In addition, the Surveyor has agreed to supply a generic Mortgage Valuation Report.

2.2 The Inspection

The inspection is a general surface examination of those parts of the Property which are accessible: in other words, **visible and readily available for examination from ground and floor levels without risk of causing damage to the Property or injury to the Surveyor.**

All references to visual inspection refer to an inspection from within the Property at floor level and from ground level within the site and adjoining public areas, without the need to move any obstructions. Any references to left or right are taken facing the front of the Property.

The inspection is carried out with the Seller's permission, without causing damage to the building or contents. Furniture, stored items and insulation are not moved.

Unless identified in the Report the Surveyor will assume that no harmful or hazardous materials have been used in the construction. The presence or possible consequences of any site contamination will not be researched.

The Surveyor will not carry out an asbestos inspection, and will not be acting as an asbestos inspector in completing a Report of Property that may fall within the Control of Asbestos in the Workplace Regulations. In the case of flats it will be assumed that there is a duty holder, as defined in the Regulations and that a register of asbestos and effective management plan is in place, which does not require any expenditure, or pose a significant risk to health. No enquiry of the duty holder will be made.

2.3 The Report

The Report will be prepared by the Surveyor who carried out the Property inspection and will describe various aspects of the Property as defined by the headings of the Single Survey report with the comments being general and unbiased. The report on the location, style and condition of the Property will be concise and will be restricted to matters that could have a material affect upon value and will omit items that, in the Surveyor's opinion, are not significant. If certain minor matters are mentioned, it should not be interpreted that the Property is free of any other minor defects.

Throughout the Report the following repair categories will be used to give an overall opinion of the state of repair and condition of the Property:

2.3.1 Category 3:

Urgent repairs or replacement are needed now. Failure to deal with them may cause problems to other parts of the Property or cause a safety hazard. Estimates for repairs or replacement are needed now.

2.3.2 Category 2:

Repairs or replacement requiring future attention, but estimates are still advised.

2.3.3 Category 1:

No immediate action or repair is needed.

WARNING:

If left unattended, even for a relatively short period, Category 2 repairs can rapidly develop into more serious Category 3 repairs. The existence of Category 2 or Category 3 repairs may have an adverse effect on marketability, value and the sale price ultimately achieved for the Property. This is particularly true during slow market conditions when the effect can be considerable. Parts of the Property which cannot be seen or accessed will not be reported upon and this will be stated. If the Surveyor suspects that a defect may exist within an unexposed area and which could have a material effect upon the value, he may recommend further investigation by specialist contractors

2.4 Services

Surveyors are not equipped or qualified to test the services and therefore no comment can be interpreted as implying that the design, installation and function of the services are in accordance/compliance with regulations, safety and efficiency expectations. However, comment is made where there is cause to suspect significant defects or shortcomings with the installations. No tests are made of any services or appliances.

2.5 Accessibility

A section is included to help identify the basic information interested parties need to know to decide whether to view a Property.

2.6 Energy Report

A section is included that makes provision for an Energy Report, relative to the Property. The Surveyor will collect physical data from the Property and provide such data in a format required by an accredited energy company. The Surveyor cannot of course accept liability for any advice given by the energy company.

2.7 Valuation & Conveyancer Issues

The last section of the Report contains matters considered relevant to the conveyancer (solicitor). It also contains the Surveyor's opinion both of the market value of the Property and of the re-instatement cost, as defined below.

"Market Value" is the estimated amount for which a property should exchange on the date of valuation within a willing buyer and willing seller in an arms-length transaction after proper marketing wherein the parties have each acted knowledgeably, prudently and without compulsion. In arriving at the opinion of the Market Value the Surveyor also makes various standard assumptions covering, for example, vacant possession; tenure and other legal considerations; contamination and hazardous materials; the condition of uninspected parts; the right to use mains services; and the exclusion of curtains, carpets etc. from the valuation. In the case of flats, the following further assumptions are made that:

- There are rights of access and exit over all communal roadways, corridors, stairways etc. and to use communal grounds, parking areas, and other facilities;
- There are no particularly troublesome or unusual legal restrictions.
- There is no current dispute between the occupiers of the flats or any outstanding claims or losses; and the costs of repairs to the building are shared among the co-proprietors on an equitable basis.

Any additional assumption, or any found not to apply, is reported.

"Re-instatement cost" is an estimate for insurance purposes of the current cost of rebuilding the Property in its present form unless otherwise stated. This includes the cost of rebuilding the garage and permanent outbuildings, site clearance and professional fees, but excludes VAT (except on the fees).

Sellers or prospective Purchasers may consider it prudent to instruct a re-inspection and revaluation after a period of 12 weeks (or sooner if appropriate) to reflect changing circumstances in the market and/or in the physical condition of the Property.

It is assumed that any relevant Local Authority consents, warrants and completion certificates have been obtained where construction or alteration works have been undertaken.

This agreement and any dispute or claim arising out of or in connection with its subject matter shall be governed by and construed in accordance with the laws of Scotland, and the Scottish Courts will have exclusive jurisdiction to hear such claims.

DATA PROTECTION

Graham + Sibbald and the Client each undertake that:

- (a) they shall comply with all applicable requirements of the Data Protection Legislation, including without limitation any obligations relating to the rights of a data subject and the reporting of personal data breaches (all as defined in the UK GDPR); and
- (b) not do or omit to do anything which puts any other party to the Agreement in breach of the Data Protection Legislation.

Without prejudice to the generality of this clause, you shall ensure that you have all necessary appropriate consents and notices in place to enable lawful transfer of the personal data to Graham + Sibbald for the duration and purposes of this Agreement. You shall have liability for and shall indemnify Graham + Sibbald for any loss, liability, costs (including legal costs), damages, or expenses resulting from any breach by you of the Data Protection Legislation. For further information regarding how Graham + Sibbald processes personal data in relation to this Agreement, please see Graham + Sibbald's privacy notice on their website.

Mortgage Valuation Report for Home Report



Source: G+S Home Report

Seller Name Aaron and Frances Fimister

Reference KDY-2026\08\0003

1) Property Details

House Name

Number / Ext 16

Street Whytehouse Avenue

Area

Town Kirkcaldy

Postcode KY1 1UW

2) Description of property

Property Type House

House Type Semi-Detached

Floor number of subject property

Year Built The subjects are thought to have been constructed around 1995

Non Traditional Construction? No

No. of floors in block

(*Specify under general comments)

No. of flats in block

3) Accommodation - give number of:

Receptions 2

Bedrooms 3

Kitchens 1

Bathrooms 1

Total Inside W.C.s 2

No of floors 2

Other Not applicable.

Garage(s) Parking Space

Outbuildings None

Garden Gardens to front, side and rear.

4) Tenure Absolute Ownership

If Leasehold, years unexpired:

Any known or reported problems with onerous or unusual ground rent or service charges?

Owner occupied ☒

Tenanted ☐

Vacant ☐

If part tenanted, please give details

5) Subsidence, Settlement and Landslip

Does the property show signs of, or is the property located near any area subject to landslip, heave, settlement, subsidence, flooding or mining?

Yes

If yes, please clarify

There is evidence of settlement in the building noted both internally and externally but this is not inconsistent with a property of this age and type and on the basis of a single inspection appears to be longstanding.

6) Condition of Property

Are essential internal repairs required?

Yes ☐

No ☒

Are essential external repairs required?

Yes ☐

No ☒

Should the repairs be effected before the advance is made?

Yes ☐

No ☐

Is a mortgage retention recommended?

Yes ☐

No ☒

If the answer to any of the above questions is Yes, please provide further detail:



Regulated by RICS
Chartered Surveyors
A Quality Assured Firm



7) Services Mains water ☒ Mains drainage ☒ Electricity ☒ Gas ☒ Central heating

8) Insurance Reinstatement Value

Total area of all floors measured internally (m²)

Cost of rebuilding inc. demolition, site clearance, professional fees, local authority requirements and main building (inc all other structures within the site boundaries unless specifically excluded)

9) Market Valuation for Mortgage Purposes (Assuming Vacant Possession)

Comment on mortgageability

In our opinion the property forms suitable security for loan purposes subject to specific lender's criteria which may vary.

Valuation in present condition:

Valuation on completion of any works required under Question 6:

10) General Comments

Please advise of any special features of the property and/or the location, which affects the property.

The subjects are located in an established mixed residential/commercial district of Kirkcaldy, close to the town centre, where surrounding properties are of mixed age and character. Local shopping and public transport amenities are available nearby.

The subjects appear to have been maintained in a fair condition having regard to age, type and construction but now require some general refurbishment/upgrading.

Some higher than average moisture readings were recorded to wall surfaces within the property. Further moisture readings were recorded to the lintel around the front main entrance door and to the hallway ceiling. There are pin holes to roof space timbers indicative of infestation by wood boring insect. There is the potential for further related issues to exist in concealed areas. It is recommended that a reputable timber/damp specialist firm be employed to carry out a detailed inspection of the entire subjects and thereafter implement all necessary remedial works under cover of long term guarantee.

The need for vigilant ongoing maintenance/repair should be anticipated to the external building fabric paying particular attention to roof coverings/pertinents, rainwater units, and to garden boundary and retaining walls. A defective rear porch requires to be substantially rebuilt or removed by a competent contractor.

The subjects are accessed to the rear via a private lane over which there is understood to be a Right of Way. The conveyancer can verify whether all legal arrangements are adequate.

The subjects are understood to be located within a Conservation Area which may have implications for future maintenance/repairs and insurance. Further details can be confirmed legally.

The valuation is made on the assumption that any alterations that may have been carried out to the property satisfy all relevant legislation and have full certification where appropriate. While not necessarily an exhaustive list, alterations noted at the time of our inspection include the removal of a hallway cupboard and associated wall for the purposes of creating alternative hallway access to the kitchen; the formation of a WC compartment off the hallway at ground floor level; the installation of replacement double glazed window units and doors and the installation of an attic hatch with associated drop down ladder involving the cutting and re-siting of roof structure timbers.

At the time of inspection the subjects were occupied, furnished and some floors were covered. The services were not tested.

IMPORTANT - THIS IS A CONFIDENTIAL REPORT PREPARED FOR MORTGAGE PURPOSES.

Certificate: I have personally inspected the property described herein and confirm adequate professional indemnity cover is held.

Signature		Company / Firm Name	Graham + Sibbald Property Consultants Limited
Valuer name and qualification	Zoe C M Gardner MA (Hons) MRICS For and on behalf of Graham + Sibbald	Office Name	Kirkcaldy
Date of inspection	06/08/2026	Office Addr1	Suite B3, Carlyle House
Date of report	13/08/2026	Office Addr2	Carlyle Road
		Area	
		Town	Kirkcaldy
		Postcode	KY1 1DB
		Tel no	01592 266211



In these Terms and Conditions of Engagement, the following expressions shall have the following meanings:

"Agreement" means these Terms and Conditions of Engagement, the Instructions and the confirmation letter issued by Graham + Sibbald.

"Client"/"you"/"your" means the person, firm, company, organisation or other entity engaging Graham + Sibbald to provide the inspection services.

"Data Protection Legislation" means the UK Data Protection Legislation and any other European Union legislation relating to personal data and all other legislation and regulatory requirements in force from time to time which apply to a party relating to the use of personal data (including, without limitation, the privacy of electronic communications).

"Graham + Sibbald"/"we"/"us"/"our" means Graham + Sibbald Property Consultants Limited, a limited company incorporated in Scotland (Registered Number SC837809) and having its registered office address at Seabraes House, 18 Greenmarket, Dundee, DD1 4QB.

"Instructions" means the written or verbal instructions by the Client to Graham + Sibbald, which appoint Graham + Sibbald to provide the inspection services.

"Property" means the property identified and described in the Instructions.

"UK Data Protection Legislation" means all applicable data protection and privacy legislation in force from time to time in the UK including the UK GDPR; the Data Protection Act 2018; the Privacy and Electronic Communications Directive 2002/58/EC (as updated by Directive 2009/136/EC) and the Privacy and Electronic Communications Regulations 2003 (SI 2003/2426) as amended.

"UK GDPR" has the meaning given to it in section 3(10) (as supplemented by section 205(4)) of the Data Protection Act 2018.

A valuation for mortgage is a limited inspection and report produced for building societies, banks and other lenders to enable them to make a lending decision. IT IS NOT A SURVEY. Unless otherwise stated the date of valuation will be the date of inspection.

This report is used to guide the lender on the market value of the Property for mortgage purposes and is carried out for this purpose alone. Although the inspection will be carried out by a valuer who will usually be a qualified surveyor it is not a detailed inspection of the Property, and only major visible defects will be noted. Subject to reasonable accessibility, the roof space is inspected only to the extent visible from the access hatch without entering it. The surveyor will not inspect under floor areas, communal roof space or other parts not readily accessible. The exterior and roof of the Property will be inspected from ground level only from within the boundaries of the site and adjacent/communal public areas. The area of the Property will be taken into account, and the rooms individually inspected, but floor coverings and furniture will not be moved. Services (such as water, gas, electricity and drainage) will not be tested and we will not advise as to whether these comply with regulations in respect of these services.

The surveyor may recommend that a part of the mortgage be retained by the lenders until such time as particular repair works are carried out. Similarly, the report may suggest that the borrower should undertake to carry out certain repairs or commission more extensive investigation where hidden defects are suspected since these may have a material effect on the value of the Property. If a retention is recommended then the figure should not be regarded as an estimate of repair costs. Its purpose is to protect the interests of the lending institution. It is recommended that detailed estimates be obtained before proceeding with the purchase. Attention is drawn to the fact that if a subsequent transcription of this report is prepared on a lenders form, then in order to comply with the lenders specific requirements, the wording or phraseology may differ. Many people rely on the mortgage valuation certificate in the mistaken belief that it is a detailed survey. The report is often made available to house buyers by lenders, but this does not mean that it should be relied upon as a report on the condition of the building.

The definition of 'market value' is the estimated amount for which a Property should exchange on the date of valuation, between a willing buyer and a willing seller in an arms-length transaction after proper marketing wherein the parties had acted knowledgeably, prudently and without compulsion. For the purpose of this market value the surveyor has assumed that vacant possession will be provided. Unless otherwise stated the surveyor has valued the interest on a comparable basis.

The inspection that has been undertaken should not be regarded as a survey. The surveyor did not inspect parts of the Property which were covered, unexposed or inaccessible and are therefore unable to report that any such part of the Property is free from defect. Defects which are not considered materially to affect the value of the Property or other matters which would be attended to during maintenance, may not have been mentioned. If defects have been mentioned in this report, they should be regarded as indicative and not exhaustive. For the purposes of this valuation the surveyor assumes that all uninspected areas are free from defect which would have a material effect on value.

In accordance with our normal practice, we must state that this report is for the use only of the party to whom it is addressed or their named client and no responsibility is accepted to any third party for the whole or any part of its content.

In addition, we would bring to your attention that neither the whole nor any part of this report, nor any reference thereto, may be included in any document, circular or statement without prior written approval of the form and context in which it will appear.

The surveyor shall, unless otherwise expressly agreed, rely upon information provided by the Client and/or the Client's legal or other professional advisers relating to tenure, leases and all other relevant matters.

For the purposes of this valuation the surveyor has assumed that all ground burdens are nominal or have been redeemed and that there are no unusual outgoings or onerous restrictions contained within the titles of which we have no knowledge. The surveyor has further assumed that the subjects are unaffected by any adverse planning proposals.

Unless otherwise stated, it is assumed that all the required valid planning permissions and statutory approvals for the building and for their use, including any recent or significant extensions or alterations, have been obtained and complied with. It has been further assumed that no deleterious or hazardous materials or techniques have been used in the construction of the subject and that there is no contamination in or from the ground or from the immediate surrounds.

The surveyor will not carry out an asbestos inspection and will not be acting as an asbestos inspector in completing a valuation inspection of Property that may fall within the Control of Asbestos Regulations 2012. No enquiry of the duty holder, as defined in the Control of Asbestos Regulations 2012, of the existence of an asbestos register, or of any plan for the management of asbestos will be made. Your legal adviser/conveyancer should confirm the duty holder under these regulations, the availability of an asbestos register and the existence and management of any asbestos containing materials. For the purposes of this valuation, the surveyor has assumed that there is a duty holder, as defined in the Control of Asbestos Regulations 2006, and that a register of asbestos and effective management plan is in place which does not require any immediate expenditure or pose a significant risk to health or breach the HSE Regulations.

The surveyor confirms that this mortgage valuation is prepared in accordance with the RICS Valuation - Global Standards 2017 and incorporating IVSC International Valuation Standards and, unless other stated, we are External Valuers as defined therein. Further information may also be obtained from the Royal Institution of Chartered Surveyors in Scotland, 10 Charlotte Square, Edinburgh EH2 4DR.

As part of this remit, the surveyor may, where he/she feels qualified and experienced to do so, provide general comment on standard appropriate supplementary documentation, presented to us by the Client's lender and conveyancer. In the event of a significant amount of documentation being provided to us, an additional fee may be incurred. Any additional fees will be agreed with you in advance.

We confirm that Graham + Sibbald operates formal procedures to deal with complaints from clients in accordance with By-law 19, Regulation 2.7 of the Royal Institution of Chartered Surveyors Rules of Conduct and Disciplinary Procedures. A copy of this procedure is available on request.

Graham + Sibbald's total liability to the Client (and any third party relying upon this report) under this Agreement (including liability in contract, tort (including negligence), breach of statutory duty, or otherwise) shall be limited to the lower of the following: a) 25% of the valuation or b) £250,000.

This agreement and any dispute or claim arising out of or in connection with its subject matter shall be governed by and construed in accordance with the laws of Scotland, and the Scottish courts will have exclusive jurisdiction to hear such claims.

Graham + Sibbald and the Client each undertake that: (a) they shall comply with all applicable requirements of the Data Protection Legislation, including without limitation any obligations relating to the rights of a data subject and the reporting of personal data breaches (all as defined in the UK GDPR); and (b) not do or omit to do anything which puts any other party to the Agreement in breach of the Data Protection Legislation.

Without prejudice to the generality of this clause, you shall ensure that you have all necessary appropriate consents and notices in place to enable lawful transfer of the personal data to Graham + Sibbald for the duration and purposes of this Agreement. You shall have liability for and shall indemnify Graham + Sibbald for any loss, liability, costs (including legal costs), damages, or expenses resulting from any breach by you of the Data Protection Legislation. For further information regarding how Graham + Sibbald processes personal data in relation to this Agreement, please see Graham + Sibbald's privacy notice available via our website.

Energy Performance Certificate (EPC)

Scotland

Dwellings

16 WHYTEHOUSE AVENUE, KIRKCALDY, KY1 1UW

Dwelling type: Semi-detached house
Date of assessment: 06 August 2026
Date of certificate: 12 August 2026
Total floor area: 117 m²
Primary Energy Indicator: 260 kWh/m²/year

Reference number: 0269-1023-2208-6626-6200
Type of assessment: RdSAP, existing dwelling
Approved Organisation: Elmhurst
Main heating and fuel: Boiler and radiators, mains gas

You can use this document to:

- Compare current ratings of properties to see which are more energy efficient and environmentally friendly
- Find out how to save energy and money and also reduce CO₂ emissions by improving your home

Estimated energy costs for your home for 3 years*	£6,441	See your recommendations report for more information
Over 3 years you could save*	£2,055	

* based upon the cost of energy for heating, hot water, lighting and ventilation, calculated using standard assumptions

Very energy efficient - lower running costs



Not energy efficient - higher running costs

Current	Potential
64	79


Energy Efficiency Rating

This graph shows the current efficiency of your home, taking into account both energy efficiency and fuel costs. The higher this rating, the lower your fuel bills are likely to be.

Your current rating is **band D (64)**. The average rating for EPCs in Scotland is **band D (61)**.

The potential rating shows the effect of undertaking all of the improvement measures listed within your recommendations report.

Very environmentally friendly - lower CO₂ emissions

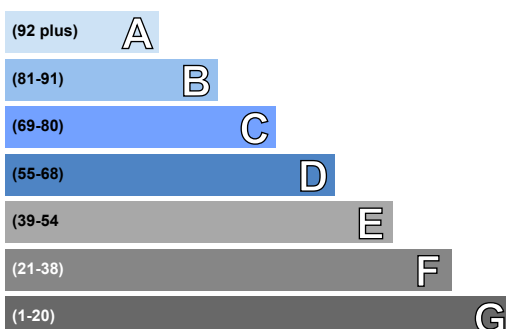

Not environmentally friendly - higher CO₂ emissions

Current	Potential
59	75

Environmental Impact (CO₂) Rating

This graph shows the effect of your home on the environment in terms of carbon dioxide (CO₂) emissions. The higher the rating, the less impact it has on the environment.

Your current rating is **band D (59)**

The potential rating shows the effect of undertaking all of the improvement measures listed within your recommendations report.

Top actions you can take to save money and make your home more efficient

Recommended measures	Indicative cost	Typical savings over 3 years
1 Flat roof or sloping ceiling insulation	£900 - £1,200	£306.00
2 Room-in-roof insulation	£900 - £1,200	£465.00
3 Internal wall insulation	£7,500 - £11,000	£930.00

A full list of recommended improvement measures for your home, together with more information on potential cost and savings and advice to help you carry out improvements can be found in your recommendations report.

To find out more about the recommended measures and other actions you could take today to stop wasting energy and money, visit greenerscotland.org or contact Home Energy Scotland on 0808 808 2282.

THIS PAGE IS THE ENERGY PERFORMANCE CERTIFICATE WHICH MUST BE AFFIXED TO THE DWELLING AND NOT BE REMOVED UNLESS IT IS REPLACED WITH AN UPDATED CERTIFICATE

Summary of the energy performance related features of this home

This table sets out the results of the survey which lists the current energy-related features of this home. Each element is assessed by the national calculation methodology; 1 star = very poor (least efficient), 2 stars = poor, 3 stars = average, 4 stars = good and 5 stars = very good (most efficient). The assessment does not take into consideration the condition of an element and how well it is working. 'Assumed' means that the insulation could not be inspected and an assumption has been made in the methodology, based on age and type of construction.

Element	Description	Energy Efficiency	Environmental
Walls	Sandstone, as built, no insulation (assumed)	★★☆☆☆	★★☆☆☆
Roof	Pitched, no insulation	★☆☆☆☆	★☆☆☆☆
	Roof room(s), ceiling insulated	★★★☆☆	★★★☆☆
Floor	Suspended, no insulation (assumed)	—	—
	Solid, no insulation (assumed)	—	—
Windows	Mostly double glazing	★★☆☆☆	★★☆☆☆
Main heating	Boiler and radiators, mains gas	★★★★☆	★★★★☆
Main heating controls	Programmer, room thermostat and TRVs	★★★★☆	★★★★☆
Secondary heating	Room heaters, mains gas	—	—
Hot water	From main system	★★★★☆	★★★★☆
Lighting	Excellent lighting efficiency	★★★★★	★★★★★

The energy efficiency rating of your home

Your Energy Efficiency Rating is calculated using the standard UK methodology, RdSAP. This calculates energy used for heating, hot water, lighting and ventilation and then applies fuel costs to that energy use to give an overall rating for your home. The rating is given on a scale of 1 to 100. Other than the cost of fuel for electrical appliances and for cooking, a building with a rating of 100 would cost almost nothing to run.

As we all use our homes in different ways, the energy rating is calculated using standard occupancy assumptions which may be different from the way you use it. The rating also uses national weather information to allow comparison between buildings in different parts of Scotland. However, to make information more relevant to your home, local weather data is used to calculate your energy use, CO₂ emissions, running costs and the savings possible from making improvements.

The impact of your home on the environment

One of the biggest contributors to global warming is carbon dioxide. The energy we use for heating, lighting and power in our homes produces over a quarter of the UK's carbon dioxide emissions. Different fuels produce different amounts of carbon dioxide for every kilowatt hour (kWh) of energy used. The Environmental Impact Rating of your home is calculated by applying these 'carbon factors' for the fuels you use to your overall energy use.

The calculated emissions for your home are 48 kg CO₂/m²/yr.

The average Scottish household produces about 6 tonnes of carbon dioxide every year. Based on this assessment, heating and lighting this home currently produces approximately 5.6 tonnes of carbon dioxide every year. Adopting recommendations in this report can reduce emissions and protect the environment. If you were to install all of these recommendations this could reduce emissions by 2.1 tonnes per year. You could reduce emissions even more by switching to renewable energy sources.


Estimated energy costs for this home

	Current energy costs	Potential energy costs	Potential future savings
Heating	£5,667 over 3 years	£3,612 over 3 years	
Hot water	£582 over 3 years	£582 over 3 years	
Lighting	£192 over 3 years	£192 over 3 years	
Totals	£6,441	£4,386	

These figures show how much the average household would spend in this property for heating, lighting and hot water. This excludes energy use for running appliances such as TVs, computers and cookers, and the benefits of any electricity generated by this home (for example, from photovoltaic panels). The potential savings in energy costs show the effect of undertaking all of the recommended measures listed below.

Recommendations for improvement

The measures below will improve the energy and environmental performance of this dwelling. The performance ratings after improvements listed below are cumulative; that is, they assume the improvements have been installed in the order that they appear in the table. Further information about the recommended measures and other simple actions to take today to save money is available from the Home Energy Scotland hotline which can be contacted on 0808 808 2282. Before carrying out work, make sure that the appropriate permissions are obtained, where necessary. This may include permission from a landlord (if you are a tenant) or the need to get a Building Warrant for certain types of work.

Recommended measures	Indicative cost	Typical saving per year	Rating after improvement	
			Energy	Environment
1 Flat roof or sloping ceiling insulation	£900 - £1,200	£102		
2 Room-in-roof insulation	£900 - £1,200	£155		
3 Internal wall insulation	£7,500 - £11,000	£310		
4 Floor insulation (suspended floor)	£5,000 - £10,000	£118		
5 Solar photovoltaic panels, 2.5 kWp	£8,000 - £10,000	£218		

Choosing the right improvement package

For free and impartial advice on choosing suitable measures for your property, contact the Home Energy Scotland hotline on 0808 808 2282 or go to www.greenerscotland.org.

About the recommended measures to improve your home's performance rating

This section offers additional information and advice on the recommended improvement measures for your home

1 Flat roof or sloping ceiling insulation

Insulating a flat roof or sloping ceiling will significantly reduce heat loss through the roof; this will improve levels of comfort, reduce energy use and lower fuel bills. Insulation can be placed on top of the roof under the waterproof membrane and should particularly be considered when the waterproofing needs to be replaced. Further information about roof insulation and details of local contractors can be obtained from the National Insulation Association (www.nationalinsulationassociation.org.uk). Building regulations generally apply to this work so it is best to check with your local authority building standards department.

2 Room-in-roof insulation

Insulating roof rooms will significantly reduce heat loss; this will improve levels of comfort, reduce energy use and lower fuel bills. If it has a flat ceiling insulation can usually be added above the ceiling, and sloping ceilings and walls of roof rooms can be insulated using an internal lining board. Roof voids must have adequate ventilation to prevent dampness; seek advice about this if unsure. Further information about roof room insulation and details of local contractors can be obtained from the National Insulation Association (www.nationalinsulationassociation.org.uk). Building regulations generally apply to this work so it is best to check this with your local authority building standards department.

3 Internal wall insulation

Internal wall insulation involves adding a layer of insulation to the inside surface of the external walls, which reduces heat loss and lowers fuel bills. As it is more expensive than cavity wall insulation it is only recommended for walls without a cavity, or where for technical reasons a cavity cannot be filled. Internal insulation, known as dry-lining, is where a layer of insulation is fixed to the inside surface of external walls; this type of insulation is best applied when rooms require redecorating. Further information can be obtained from the National Insulation Association (www.nationalinsulationassociation.org.uk).

4 Floor insulation (suspended floor)

Insulation of a floor will significantly reduce heat loss; this will improve levels of comfort, reduce energy use and lower fuel bills. Suspended floors can often be insulated from below but must have adequate ventilation to prevent dampness; seek advice about this if unsure. Further information about floor insulation is available from many sources including www.energysavingtrust.org.uk/scotland/Insulation/Floor-insulation. Building regulations generally apply to this work so it is best to check with your local authority building standards department.

5 Solar photovoltaic (PV) panels

A solar PV system is one which converts light directly into electricity via panels placed on the roof with no waste and no emissions. This electricity is used throughout the home in the same way as the electricity purchased from an energy supplier. Planning permission might be required, building regulations generally apply to this work and a building warrant may be required, so it is best to check with your local authority. The assessment does not include the effect of any Feed-in Tariff which could appreciably increase the savings that are shown on this EPC for solar photovoltaic panels, provided that both the product and the installer are certified by the Microgeneration Certification Scheme (or equivalent). Details of local MCS installers are available at www.microgenerationcertification.org.

Low and zero carbon energy sources

Low and zero carbon (LZC) energy sources are sources of energy that release either very little or no carbon dioxide into the atmosphere when they are used. Installing these sources may help reduce energy bills as well as cutting carbon.

LZC energy sources present: There are none provided for this home

Your home's heat demand

In this section, you can see how much energy you might need to heat your home and provide hot water. These are estimates showing how an average household uses energy. These estimates may not reflect your actual energy use, which could be higher or lower. You might spend more money on heating and hot water if your house is less energy efficient. The table below shows the potential benefit of having your loft and walls insulated. Visit <https://energysavingtrust.org.uk/energy-at-home> for more information.

Heat demand	Existing dwelling	Impact of loft insulation	Impact of cavity wall insulation	Impact of solid wall insulation
Space heating (kWh per year)	20,631.33	N/A	N/A	N/A
Water heating (kWh per year)	2,339.87			

Addendum

This dwelling has stone walls and so requires further investigation to establish whether these walls are of cavity construction and to determine which type of wall insulation is best suited.

About this document

This Recommendations Report and the accompanying Energy Performance Certificate are valid for a maximum of ten years. These documents cease to be valid where superseded by a more recent assessment of the same building carried out by a member of an Approved Organisation.

The Energy Performance Certificate and this Recommendations Report for this building were produced following an energy assessment undertaken by an assessor accredited by Elmhurst (www.elmhurstenergy.co.uk), an Approved Organisation Appointed by Scottish Ministers. The certificate has been produced under the Energy Performance of Buildings (Scotland) Regulations 2008 from data lodged to the Scottish EPC register. You can verify the validity of this document by visiting www.scottishepcregister.org.uk and entering the report reference number (RRN) printed at the top of this page.

Assessor's name:	Ms. Zoe Gardner
Assessor membership number:	EES/016133
Company name/trading name:	Graham & Sibbald
Address:	Suite 21 Flexspace John Smith Business Centre 1 Begg Road Kirkcaldy KY2 6HD
Phone number:	01592 266211
Email address:	kkelly@g-s.co.uk
Related party disclosure:	No related party

If you have any concerns regarding the content of this report or the service provided by your assessor you should in the first instance raise these matters with your assessor and with the Approved Organisation to which they belong. All Approved Organisations are required to publish their complaints and disciplinary procedures and details can be found online at the web address given above.

Use of this energy performance information

Once lodged by your EPC assessor, this Energy Performance Certificate and Recommendations Report are available to view online at www.scottishepcregister.org.uk, with the facility to search for any single record by entering the property address. This gives everyone access to any current, valid EPC except where a property has a Green Deal Plan, in which case the report reference number (RRN) must first be provided. The energy performance data in these documents, together with other building information gathered during the assessment is held on the Scottish EPC Register and is available to authorised recipients, including organisations delivering energy efficiency and carbon reduction initiatives on behalf of the Scottish and UK governments. A range of data from all assessments undertaken in Scotland is also published periodically by the Scottish Government. Further information on these matters and on Energy Performance Certificates in general, can be found at www.gov.scot/epc.

Advice and support to improve this property

There is support available, which could help you carry out some of the improvements recommended for this property on page 3 and stop wasting energy and money. For more information, visit [greener-scotland.org](https://www.greener-scotland.org) or contact Home Energy Scotland on 0808 808 2282.

Home Energy Scotland's independent and expert advisors can offer free and impartial advice on all aspects of energy efficiency, renewable energy and more.

HOMEENERGYSCOTLAND.ORG
0808 808 2282
FUNDED BY THE SCOTTISH GOVERNMENT



property questionnaire

Property address	16 Whytehouse Avenue Kirkcaldy Fife KY1 1UW
-------------------------	--

Seller(s)	Aaron and Frances Fimister
------------------	-----------------------------------

Completion date of property questionnaire	06/08/2026
--	-------------------

GRAHAM + SIBBALD

property questionnaire

Note for sellers

- Please complete this form carefully. It is important that your answers are correct.
- The information in your answers will help ensure that the sale of your house goes smoothly. Please answer each question with as much detailed information as you can.
- If anything changes after you fill in this questionnaire but before the date of entry for the sale of your house, tell your solicitor or estate agent immediately.

Information to be given to prospective buyer(s)

1.	Length of ownership	
	How long have you owned the property? 21 years	
2.	Council tax	
	Which Council Tax band is your property in? E	
3.	Parking	
	What are the arrangements for parking at your property? (Please tick all that apply) • Garage • Allocated parking space • Driveway Yes • Shared parking • On street Yes • Resident permit • Metered parking • Other (please specify):	
4.	Conservation area	
	Is your property in a designated Conservation Area (that is an area of special architectural or historical interest, the character or appearance of which it is desirable to preserve or enhance)?	Yes

property questionnaire

5.	Listed buildings	
	Is your property a Listed Building, or contained within one (that is a building recognised and approved as being of special architectural or historical interest)?	No
6.	Alterations / additions / extensions	
a.	(i) During your time in the property, have you carried out any structural alterations, additions or extensions (for example, provision of an extra bath/shower room, toilet, or bedroom)? <u>If you have answered yes</u>, please describe below the changes which you have made: A cupboard was repurposed as a WC and sink.	Yes
	(ii) Did you obtain planning permission, building warrant, completion certificate and other consents for this work? If you have answered yes, the relevant documents will be needed by the purchaser and you should give them to your solicitor as soon as possible for checking. If you do not have the documents yourself, please note below who has these documents and your solicitor or estate agent will arrange to obtain them:	No
b.	Have you had replacement windows, doors, patio doors or double glazing installed in your property? <u>If you have answered yes</u>, please answer the three questions below:	Yes
	(i) Were the replacements the same shape and type as the ones you replaced?	No
	(ii) Did this work involve any changes to the window or door openings?	Yes
	(iii) Please describe the changes made to the windows doors, or patio doors (with approximate dates when the work was completed): Broken sash and case replaced with look-a-like modern UPVC double glazing to the front of the property and one rear bedroom. Completed 2018. Please give any guarantees which you received for this work to your solicitor or estate agent.	

property questionnaire

7.	Central heating	
a.	Is there a central heating system in your property? (Note: a partial central heating system is one which does not heat all the main rooms of the property – the main living room, the bedroom(s), the hall and the bathroom). <u>If you have answered yes or partial</u> – what kind of central heating is there? (Examples: gas-fired, solid fuel, electric storage heating, gas warm air). gas-fired combo boiler with radiators in all rooms <u>If you have answered yes</u>, please answer the three questions below:	Yes
	(i) When was your central heating system or partial central heating system installed? 2023	
	(ii) Do you have a maintenance contract for the central heating system? If you have answered yes, please give details of the company with which you have a maintenance contract:	No
	(iii) When was your maintenance agreement last renewed? (Please provide the month and year).	
8.	Energy Performance Certificate	
	Does your property have an Energy Performance Certificate which is less than 10 years old?	No
9.	Issues that may have affected your property	
a.	Has there been any storm, flood, fire or other structural damage to your property while you have owned it? <u>If you have answered yes</u>, is the damage the subject of any outstanding insurance claim?	Yes No
b.	Are you aware of the existence of asbestos in your property? <u>If you have answered yes</u>, please give details:	No

property questionnaire

10.	Services																									
a. Please tick which services are connected to your property and give details of the supplier:																										
	<table border="1"> <thead> <tr> <th>Services</th> <th>Connected</th> <th>Supplier</th> </tr> </thead> <tbody> <tr> <td>Gas or liquid petroleum gas</td> <td>Yes</td> <td>Scottish Gas</td> </tr> <tr> <td>Water mains or private water supply</td> <td>Yes</td> <td>Scottish Water</td> </tr> <tr> <td>Electricity</td> <td>Yes</td> <td>Scottish Gas</td> </tr> <tr> <td>Mains drainage</td> <td>Yes</td> <td>Scottish Water</td> </tr> <tr> <td>Telephone</td> <td></td> <td></td> </tr> <tr> <td>Cable TV or satellite</td> <td></td> <td></td> </tr> <tr> <td>Broadband</td> <td>Yes</td> <td>Virgin Media</td> </tr> </tbody> </table>	Services	Connected	Supplier	Gas or liquid petroleum gas	Yes	Scottish Gas	Water mains or private water supply	Yes	Scottish Water	Electricity	Yes	Scottish Gas	Mains drainage	Yes	Scottish Water	Telephone			Cable TV or satellite			Broadband	Yes	Virgin Media	
Services	Connected	Supplier																								
Gas or liquid petroleum gas	Yes	Scottish Gas																								
Water mains or private water supply	Yes	Scottish Water																								
Electricity	Yes	Scottish Gas																								
Mains drainage	Yes	Scottish Water																								
Telephone																										
Cable TV or satellite																										
Broadband	Yes	Virgin Media																								
b.	Is there a septic tank system at your property? <u>If you have answered yes</u> , please answer the two questions below:	No																								
	(iv) Do you have appropriate consents for the discharge from your septic tank?																									
	(v) Do you have a maintenance contract for your septic tank? <u>If you have answered yes</u> , please give details of the company with which you have a maintenance contract:																									

property questionnaire

11.	Responsibilities for shared or common areas	
a.	Are you aware of any responsibility to contribute to the cost of anything used jointly, such as the repair of a shared drive, private road, boundary, or garden area? <u>If you have answered yes</u>, please give details:	No
b.	Is there a responsibility to contribute to repair and maintenance of the roof, common stairwell or other common areas? <u>If you have answered yes</u>, please give details:	No
c.	Has there been any major repair or replacement of any part of the roof during the time you have owned the property?	Yes
d.	Do you have the right to walk over any of your neighbours' property — for example to put out your rubbish bin or to maintain your boundaries? <u>If you have answered yes</u>, please give details:	No
e.	As far as you are aware, do any of your neighbours have the right to walk over your property, for example to put out their rubbish bin or to maintain their boundaries? <u>If you have answered yes</u>, please give details:	No
f.	As far as you are aware, is there a public right of way across any part of your property? (public right of way is a way over which the public has a right to pass, whether or not the land is privately-owned.) <u>If you have answered yes</u>, please give details:	No
12.	Charges associated with your property	
a.	Is there a factor or property manager for your property? <u>If you have answered yes</u>, please provide the name and address, and give details of any deposit held and approximate charges:	No

property questionnaire

b.	Is there a common buildings insurance policy? If you have answered yes, is the cost of the insurance included in your monthly/annual factor's charges?	No
c.	Please give details of any other charges you have to pay on a regular basis for the upkeep of common areas or repair works, for example to a residents' association, or maintenance or stair fund.	
13.	Specialist works	
a.	As far as you are aware, has treatment of dry rot, wet rot, damp or any other specialist work ever been carried out to your property? <u>If you have answered yes</u>, please say what the repairs were for, whether you carried out the repairs (and when) or if they were done before you bought the property.	No
b.	As far as you are aware, has any preventative work for dry rot, wet rot, or damp ever been carried out to your property? <u>If you have answered yes</u>, please give details:	No
c.	<u>If you have answered yes</u> to 13(a) or (b), do you have any guarantees relating to this work? <u>If you have answered yes</u>, these guarantees will be needed by the purchaser and should be given to your solicitor as soon as possible for checking. If you do not have them yourself <u>please write below who has these documents</u> and your solicitor or estate agent will arrange for them to be obtained. You will also need to provide a description of the work carried out. This may be shown in the original estimate. Guarantees are held by:	

property questionnaire

14.	Guarantees	
a.	Are there any guarantees or warranties for any of the following:	
(i)	Electrical work	No
(ii)	Roofing	No
(iii)	Central heating	Don't Know
(iv)	National House Building Council (NHBC)	No
(v)	Damp course	No
(vi)	Any other work or installations? (for example, cavity wall insulation, underpinning, indemnity policy)	No
b.	<u>If you have answered 'yes' or 'with title deeds'</u> , please give details of the work or installations to which the guarantee(s) relate(s):	
c.	Are there any outstanding claims under any of the guarantees listed above? <u>If you have answered yes</u> , please give details:	No
15.	Boundaries	
	So far as you are aware, has any boundary of your property been moved in the last 10 years? If you have answered yes, please give details:	No

property questionnaire

16.	Notices that affect your property	
In the past three years have you ever received a notice:		
a.	advising that the owner of a neighbouring property has made a planning application?	Yes
b.	that affects your property in some other way?	No
c.	that requires you to do any maintenance, repairs or improvements to your property?	No
<u>If you have answered yes to any of a-c</u> above, please give the notices to your solicitor or estate agent, including any notices which arrive at any time before the date of entry of the purchaser of your property.		

Declaration by the seller(s) / or other authorised body or person(s)

I / We confirm that the information in this form is true and correct to the best of my / our knowledge and belief.

I ACCEPT ☒

Name: Aaron A Fimister

Date: 06 / 08 / 2026



Looking for a Home Report?

Contact us today!



01592 266211

Check out our other services:

- Commercial Agency
- Building Surveying
- Asset Services
- Hotel + Leisure
- Commercial Valuation
- Planning + Development
- Business Rates
- Lease Consultancy
- Architecture Services
- Automotive + Roadside
- Carbon + Sustainability
- Project Management