

CONTENTS	
BUILDING	04
LOCATION	08
INTERIORS	10
TRANSPORT	18
NEIGHBOURHOOD	20
PLANS	28
SPECIFICATION	60



EightyFen
Ground Floor
1,400 sq ft
Lower Ground Floor
1,860 sq ft
Rupert Bentley-Smith
rbs@vogelgroup.co.uk
0203 234 160
Lucy Cope
lucy@vogelgroup.co.uk
0203 237 866

80

08 80



Think effortless, metropolitan work-life balance – located in London’s famous financial square mile within walking distance to Aldgate and historic Spitalfields.

This is a true capital crossroad and your gateway to a diverse and eclectic life in the City. Where new pathways are taken and perceptions are re-written. Because at EightyFen, your possibilities are endless.

Say hello
to a new
breed of
workspace.



EightyFen / Views

A true capital



crossroad.



EightyFen

City Hall

The Shard

London Bridge (17 mins walk)

Borough (25 mins walk)

22 Bishopsgate

Cannon Street (12 mins walk)

Monument (7 mins walk)

Tower 42

Bank (8 mins walk)

London Fenchurch Street (2 mins walk)

30 St Mary Axe

Perfectly placed.

Aldgate Square

Tower Hill (4 mins walk)

Tower Bridge


Tower of London

Aldgate (3 mins walk)

Liverpool Street (8 mins walk)

09

Immerse
yourself.

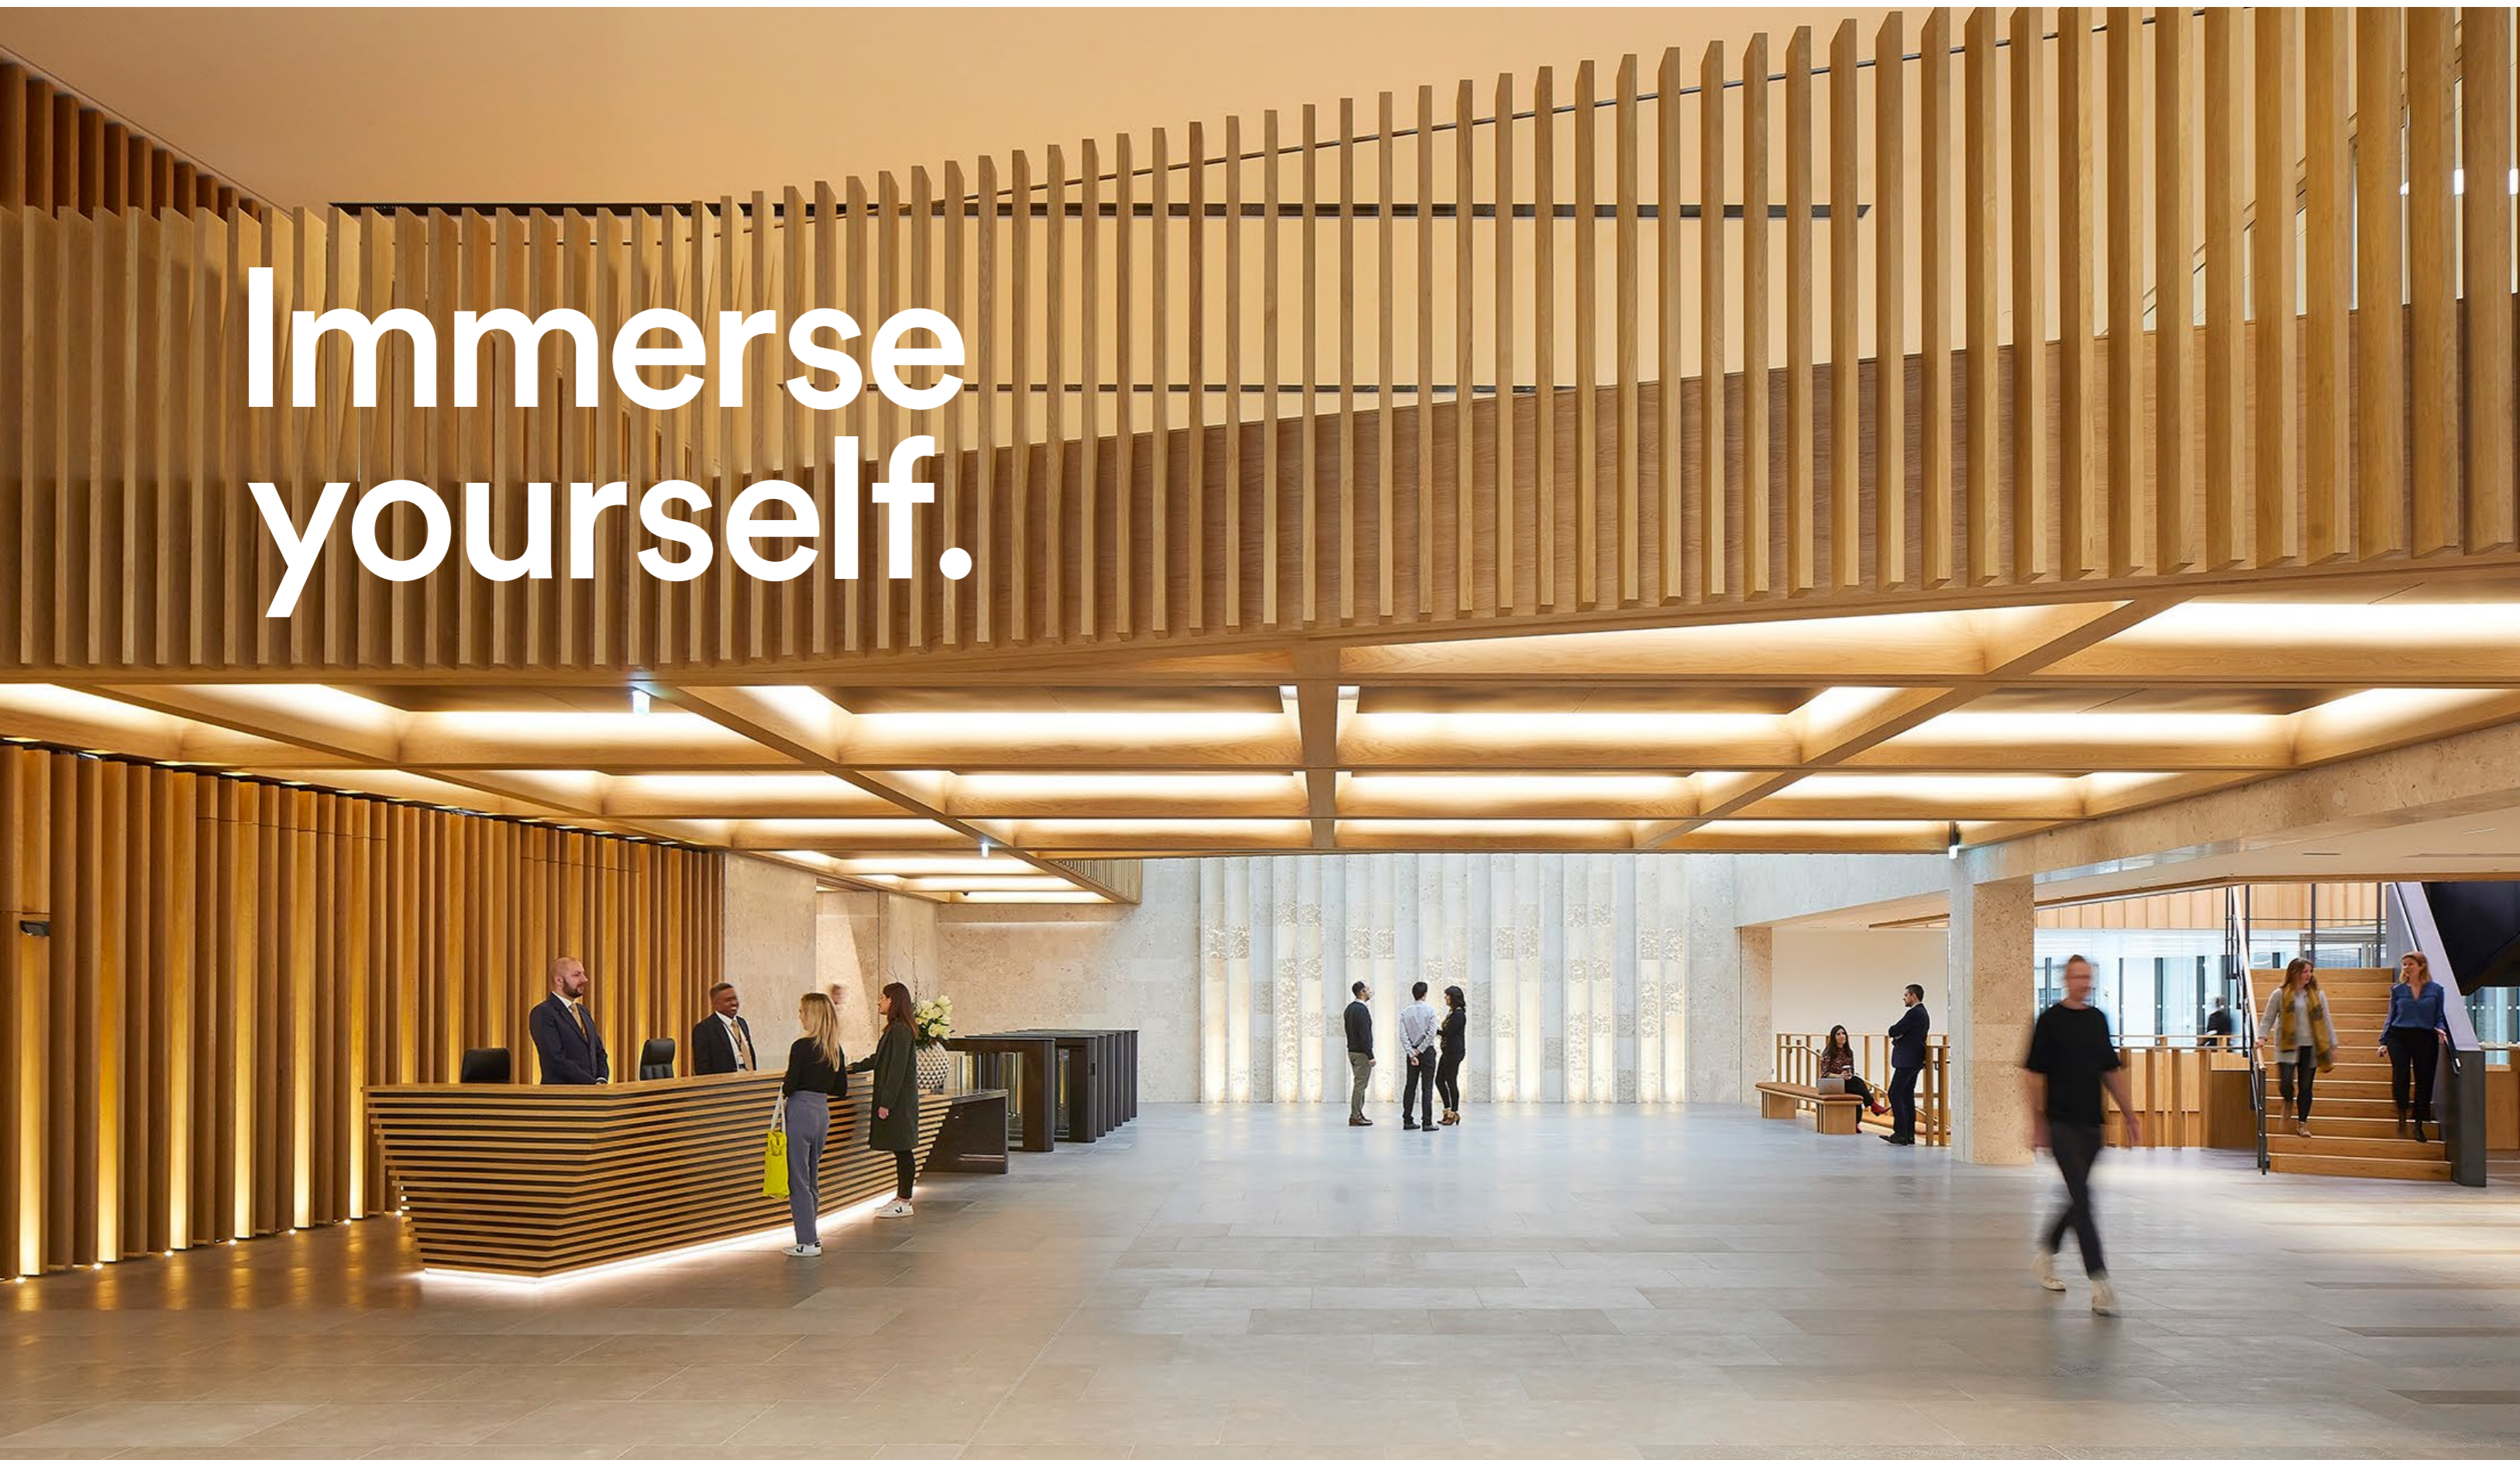



Arrive in style.

When it comes to invigorating life and good business, EightyFen is in a league of its own. High-end design specifications spread throughout 240,000 square feet of prime office space across 14 floors, along with 12,500 square feet of high-quality retail space. EightyFen also offers a ground floor café, restaurant, activated reception area and six spectacular landscaped gardens that offer captivating views across the capital.

EightyFen has everything you need to lose yourself and find something extraordinary. It's your very own prestigious platform to heighten your senses and realise the work-life balance you desire.












Be at the centre.

EightyFen / Transport

Walk time map

From here to anywhere. EightyFen connects you to all that London has to offer, perfectly positioned between the City of London and Aldgate with unrivaled transport links. A short walk east of Fenchurch Street takes you to Aldgate station, Tower Hill station lies to the south and Monument to the west. A two-minute walk takes you to Fenchurch Street main line railway station. Perfect for getting in and out of the capital. Fuss-free.

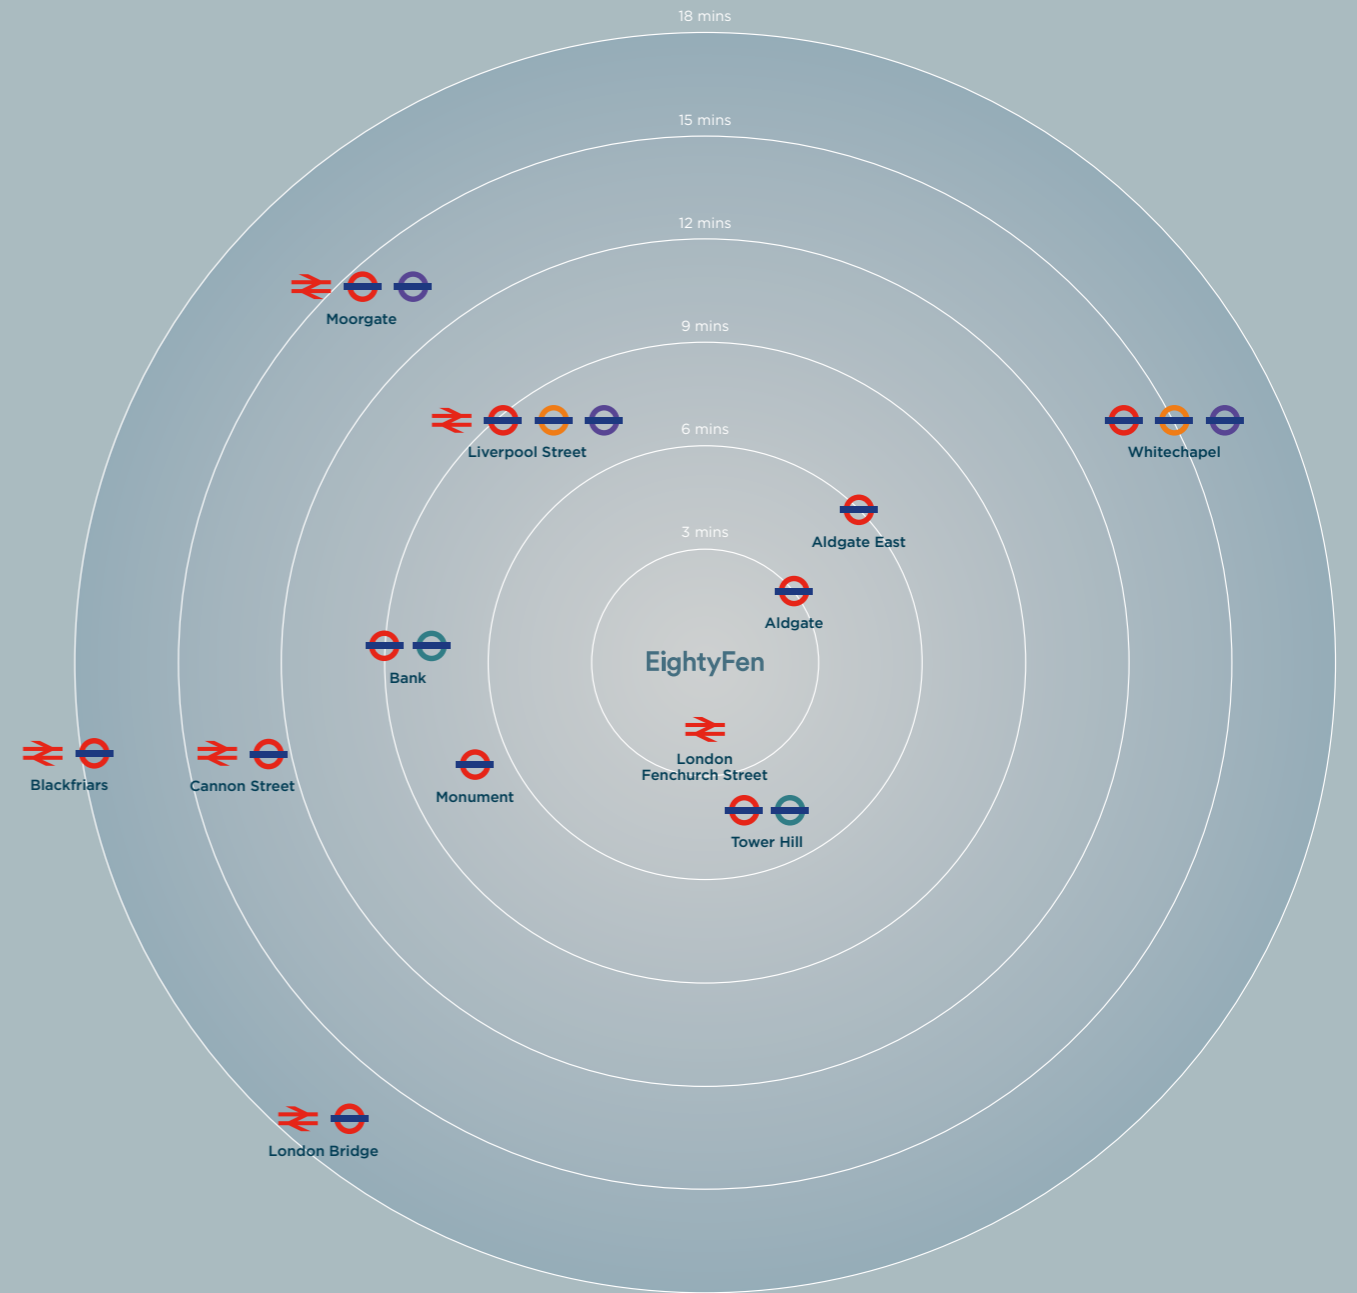

Other key journey times by train:

Waterloo (via Bank)	16 mins	London City Airport (via Bank)	30 mins
King's Cross St. Pancras (via Aldgate)	17 mins	Heathrow Airport (via Aldgate)	47 mins
		Gatwick Airport (via Aldgate)	60 mins



↑
14 Hills

With fine dining restaurants, luxury brand shopping and leisure facilities all close-by, EightyFen delivers the distinguished difference, every day.

EightyFen / Neighbourhood



↑
Diptyque

20+

cafés within five minutes' walk

Grind
↓

HotBox London
→



←
Third Space

Shop. Eat. Play.

10

gyms within five minutes' walk

Gymbox
↓

35+

bars and restaurants within five minutes' walk

Blixen, Spitalfields
↓

Spitalfields Market
→



10 hotels within five minutes' walk

The everyday just got a makeover.



←
Satyrio Restaurant & Wine Shop



←
REISS



At the heart of the City.

BARS

1. The Alchemist
2. The Sterling
3. The Craft Beer Co.
4. The Old Tea Warehouse
5. The Hoop and Grapes
6. Planet of the Grapes
7. BrewDog
8. Tank & Paddle

RESTAURANTS

9. Satyrio
10. VQ
11. Omnino
12. Caravaggio
13. Fora
14. Walter and Monty
15. Natural Kitchen
16. La Dame De Pic
17. 14 Hills
18. Jin Bo Law
19. Las Banderas

HOTELS

20. DoubleTree by Hilton
21. Four Seasons
22. CitizenM
23. Grange
24. Dorsett City
25. Motel One

CAFÉS

26. Kahaila
27. Whitechapel Grind
28. Black Sheep Coffee
29. Crush
30. Association Coffee
31. Illy Caffè
32. Caffè Nero
33. Notes Coffee Roasters
34. Caffè Vergnano 1882

GYMS

35. Virgin Active
36. Orangetheory Fitness
37. PureGym
38. Third Space
39. 1Rebel

GALLERIES & CINEMA

40. Whitechapel Gallery
41. Curzon

OTHER POINTS OF INTEREST

42. Sky Garden
43. Leadenhall Market
44. The Garden at 120
45. Spitalfields Market






BLOCKCHAIN MAERSK GROUPON amazon
 CHUBB® JLT LAD BIBLE ZURICH®
 CLYDE&CO nab Jefferies ashurst
 RBC
 BT
 M&G INVESTMENTS
 SAP
 LEBARA REDDIE & GROSE Miller Taboola
 Uber UNRULY Freshfields Bruckhaus Deringer ASPEN
 SIDLEY PERKINS+WILL NEX AECOM


In great company.

EightyFen / Local Occupiers

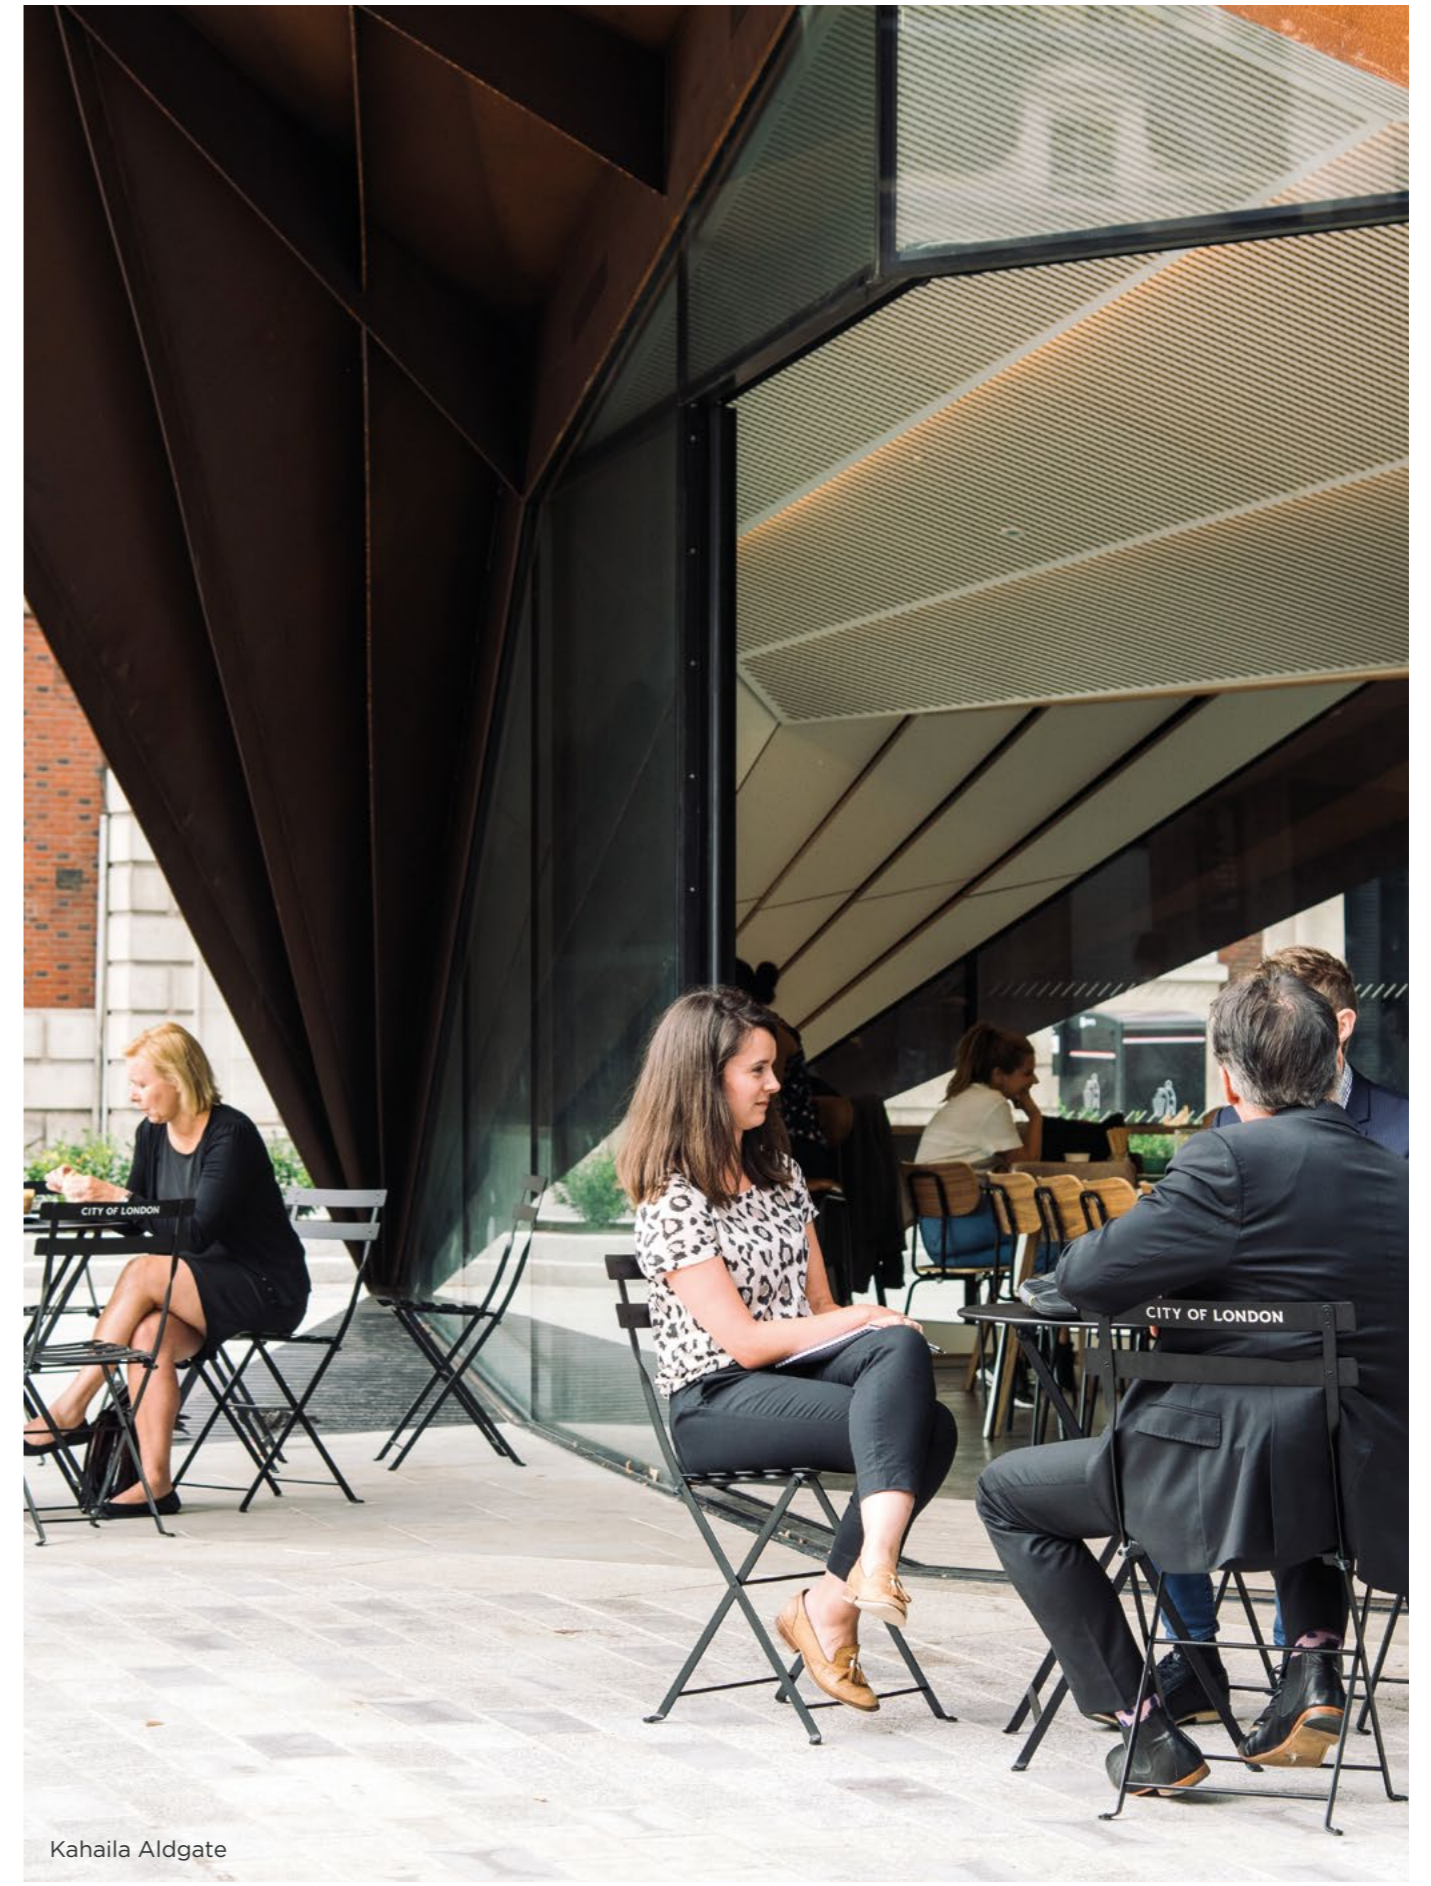

Kahaila Aldgate

● Office Availability

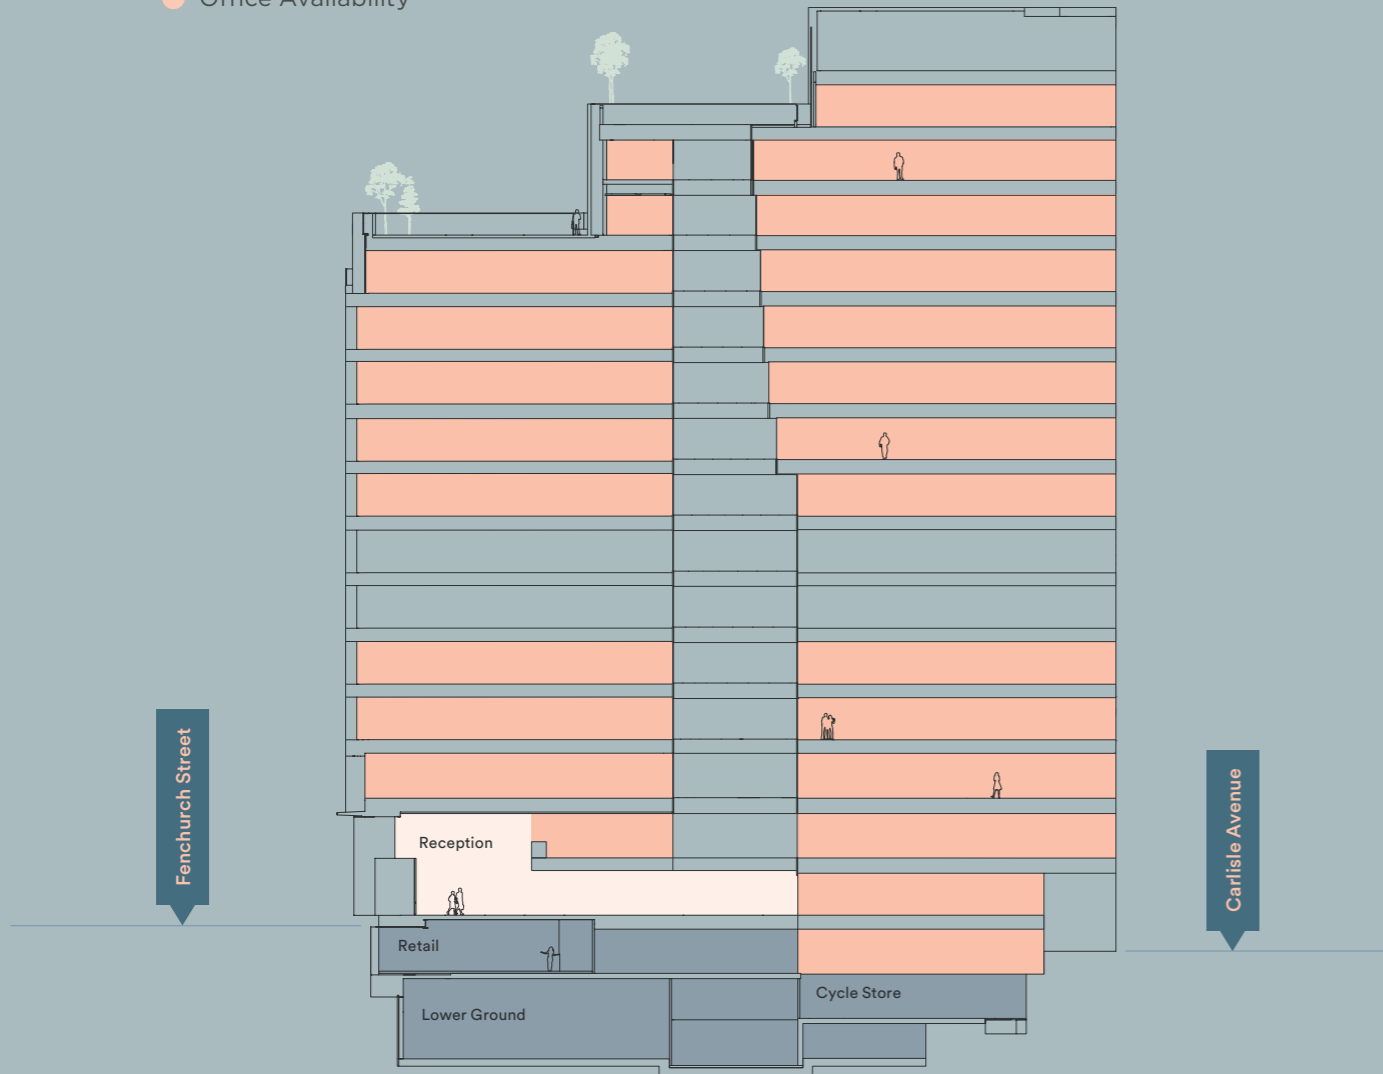

Over 240,000 sq ft
of light-filled contemporary
workspace

Level	Availability	sq ft	sq m	Terrace sq ft
14	Available	5,532	514	993
13	Available	7,125	662	2,232
12	Available	9,563	888	4,682
11	Available	14,873	1,382	2,389
10	Available	17,490	1,625	2,063
09	Available	19,787	1,838	–
08	Available	19,763	1,836	–
07	Available	19,784	1,838	–
06	Arcadis	20,309	1,887	–
05	Arcadis	20,310	1,887	–
04	Available	20,592	1,913	–
03	Available	20,525	1,907	–
02	Available	20,435	1,898	–
01	Flex/Amenity Space	16,771	1,558	–
G (Part)	Flex/Amenity Space	1,924	179	–
LG	Flex/Amenity Space	5,378	500	–
Total	Available	199,542	18,538	12,359



Ground floor




- Reception
- Flex / Amenity Space
- Retail
- Core
- Lifts
- WCs

Plans not to scale. For identification purposes only.

Fourth floor

20,592 sq ft / 1,913 sq m

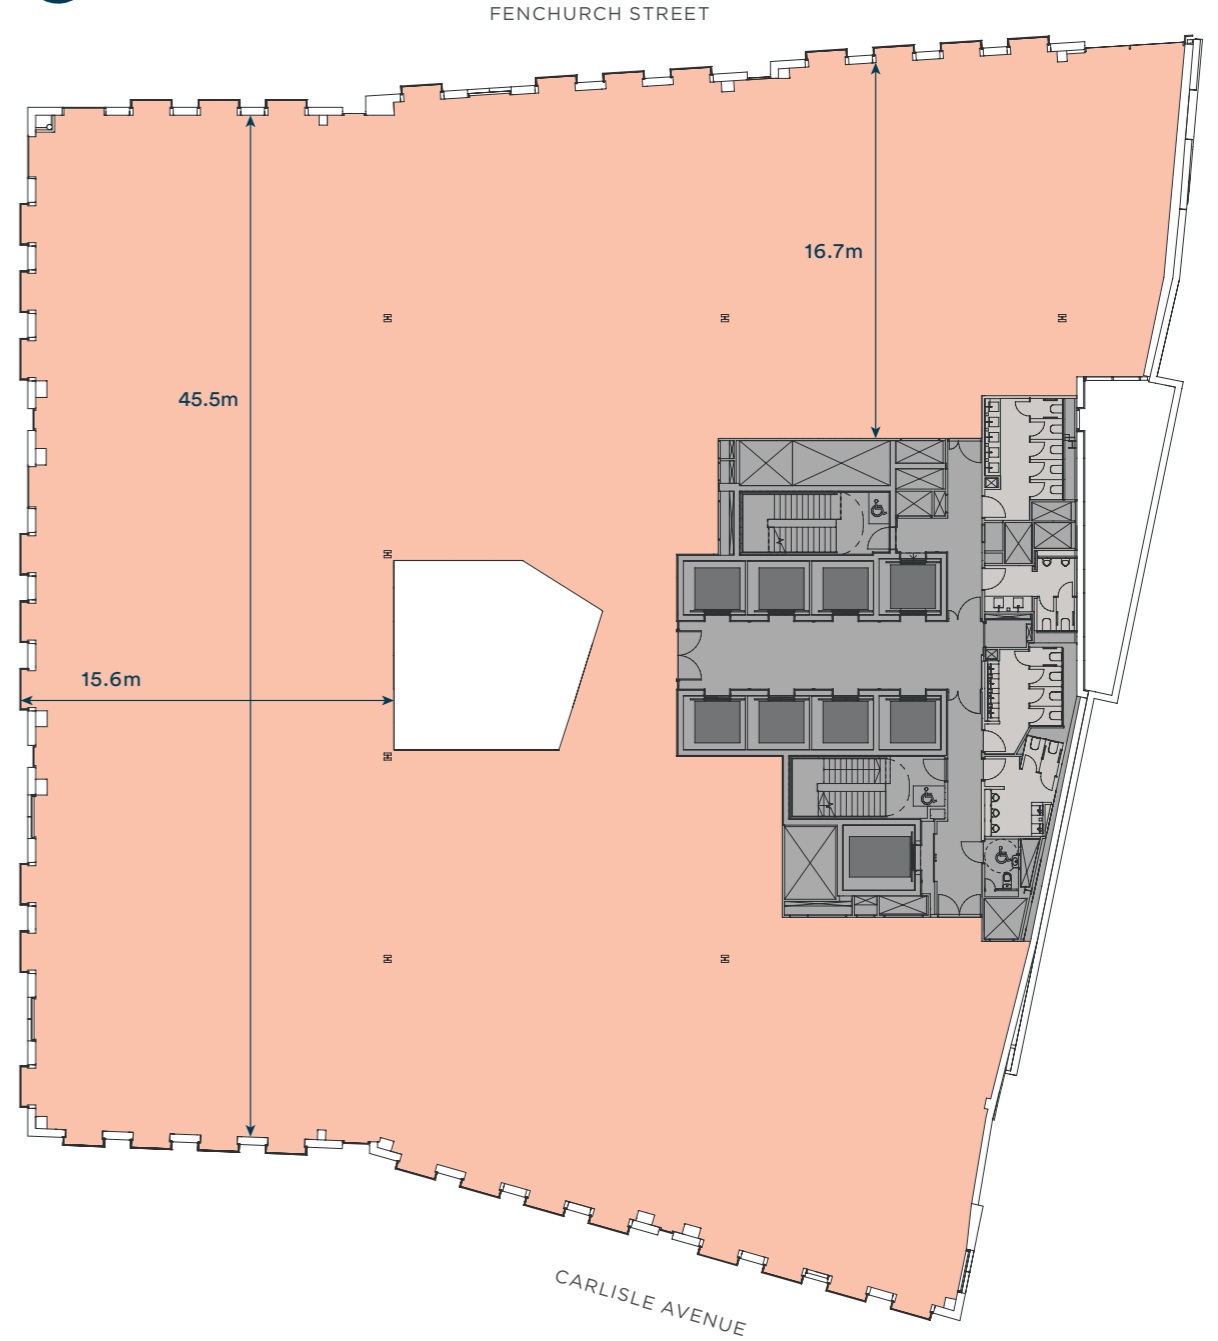


- Office (Available)
- Core
- Lifts
- WCs

Plans not to scale. For identification purposes only.



Eighth floor

19,763 sq ft / 1,836 sq m

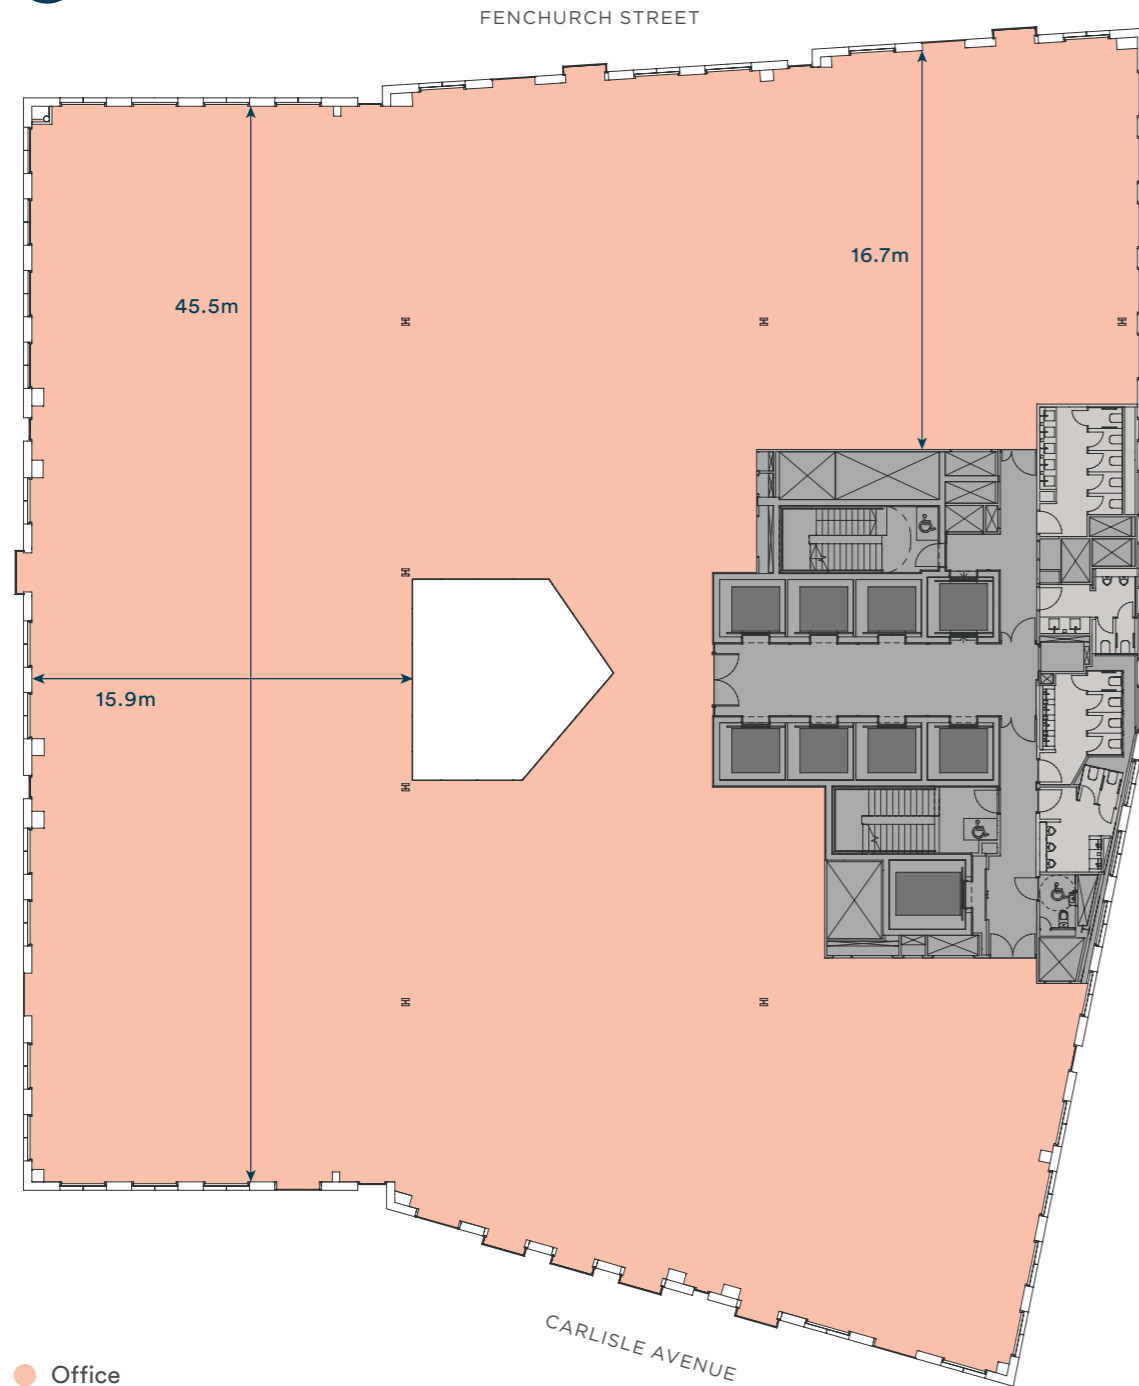


- Office
- Core
- Lifts
- WCs

Plans not to scale. For identification purposes only.

Tenth floor

17,490 sq ft / 1,625 sq m Terrace: 2,063 sq ft

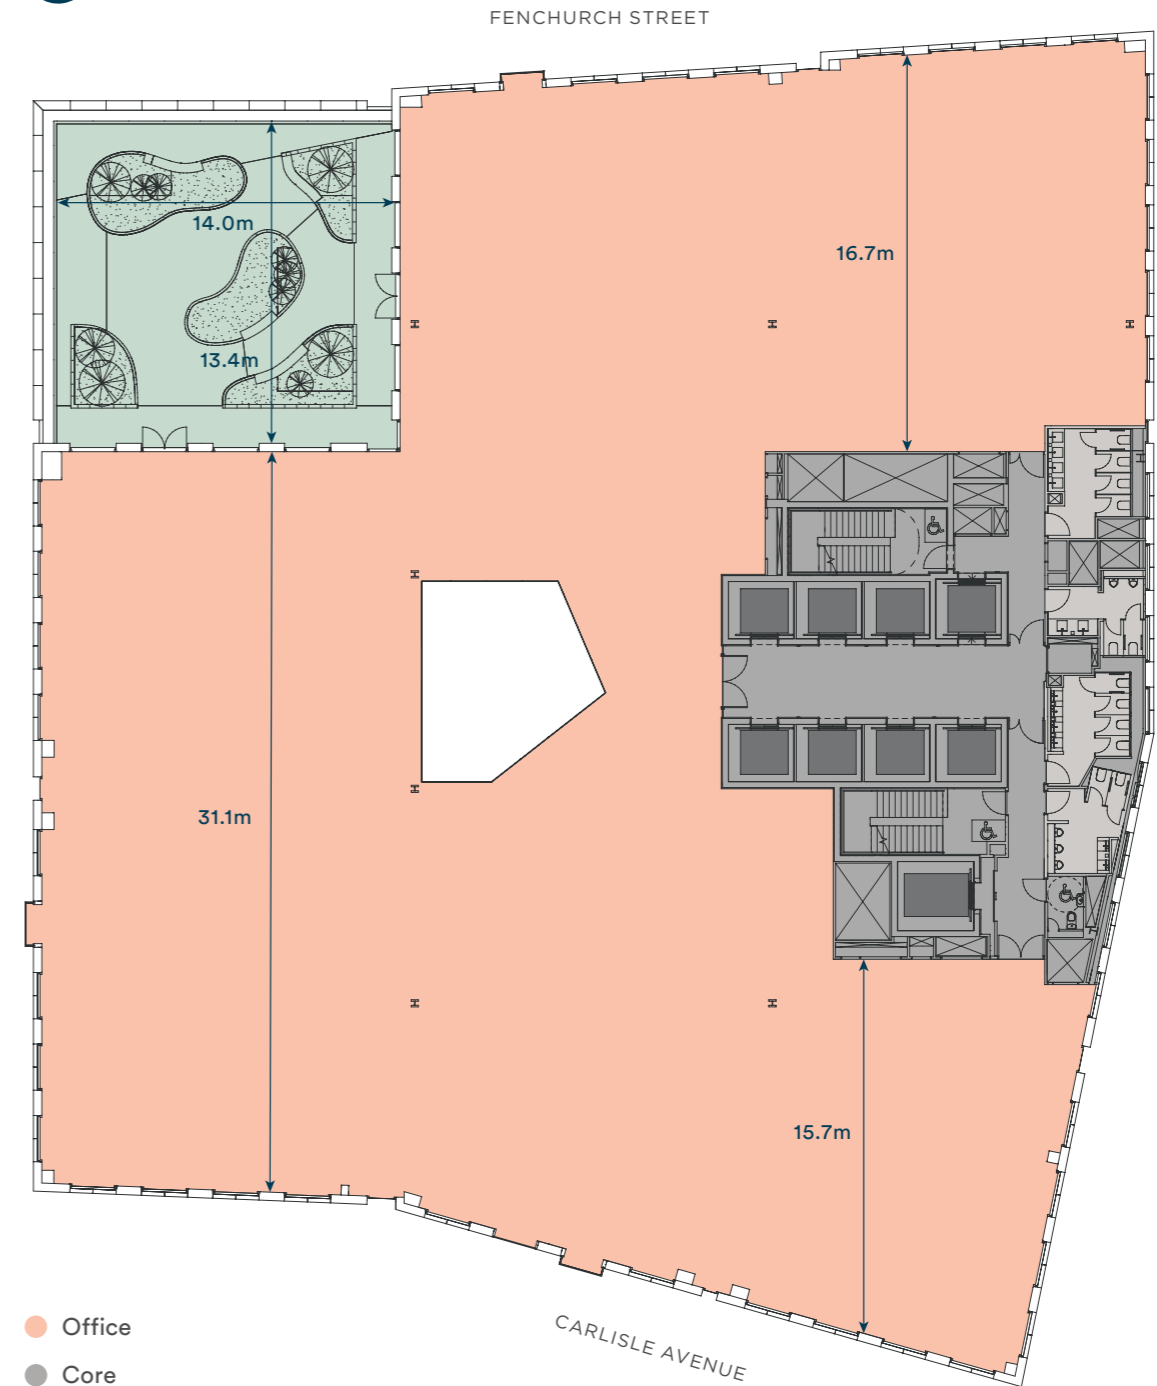

- Office
- Core
- Lifts
- WCs
- Terrace


Plans not to scale. For identification purposes only.





Eleventh floor

14,873 sq ft / 1,382 sq m Terrace: 2,389 sq ft

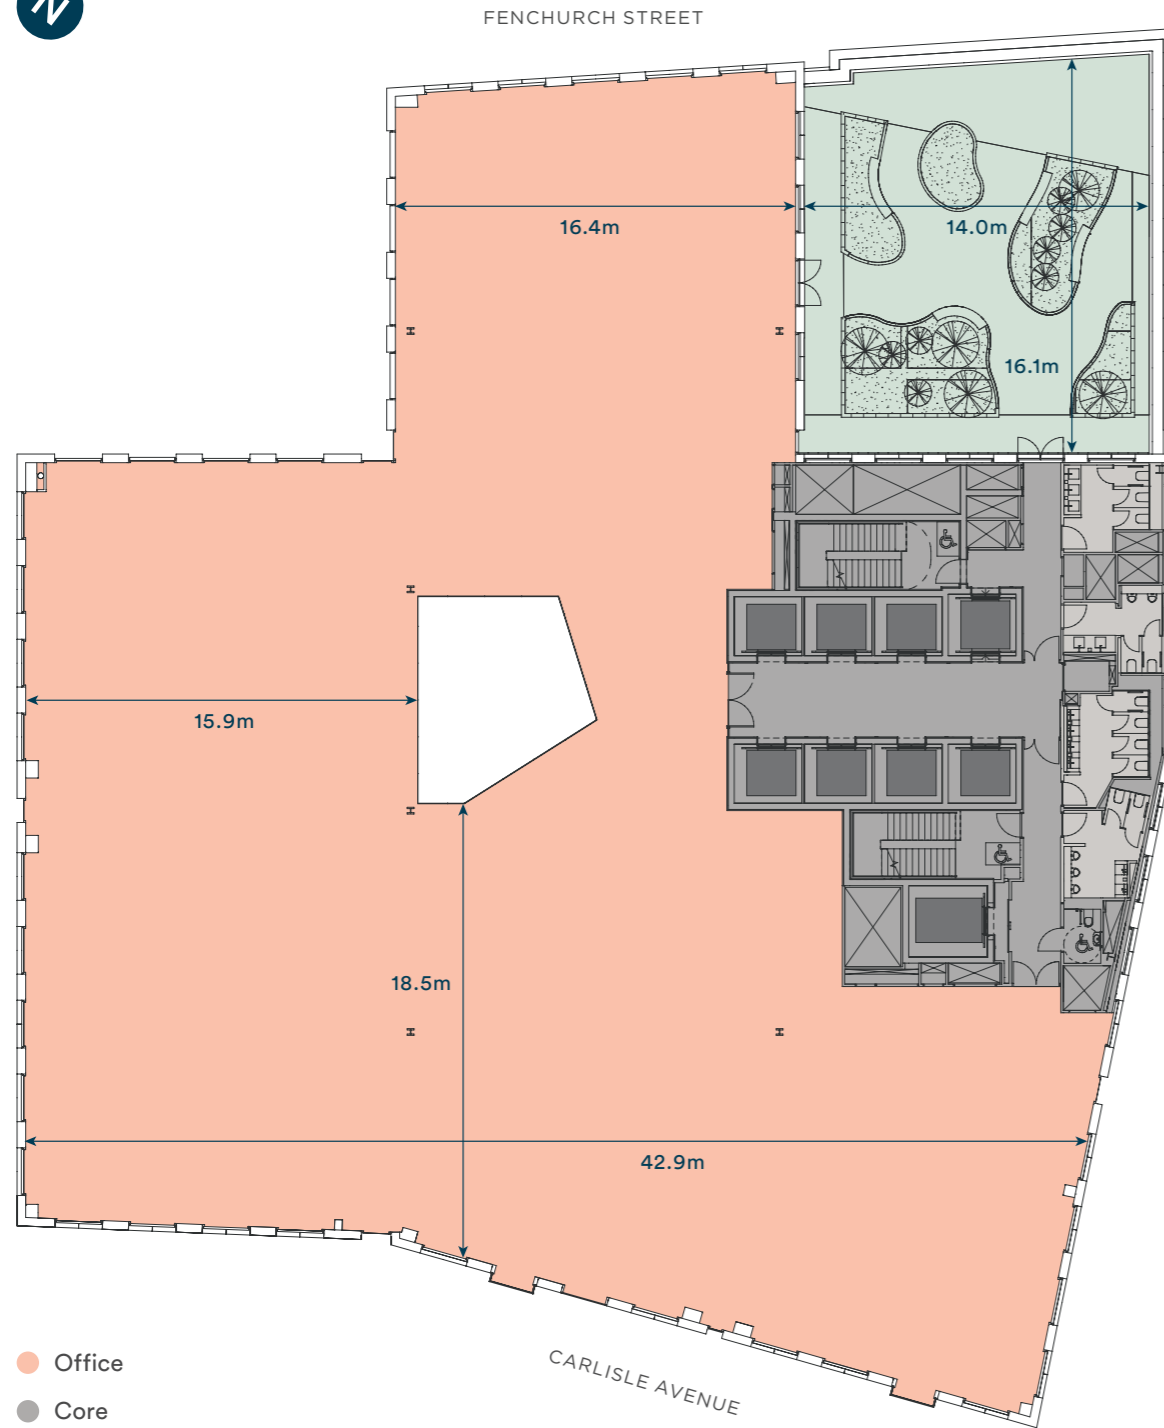


- Office
- Core
- Lifts
- WCs
- Terrace

Plans not to scale. For identification purposes only.

Twelfth floor

9,563 sq ft / 888 sq m Terraces: 4,682 sq ft

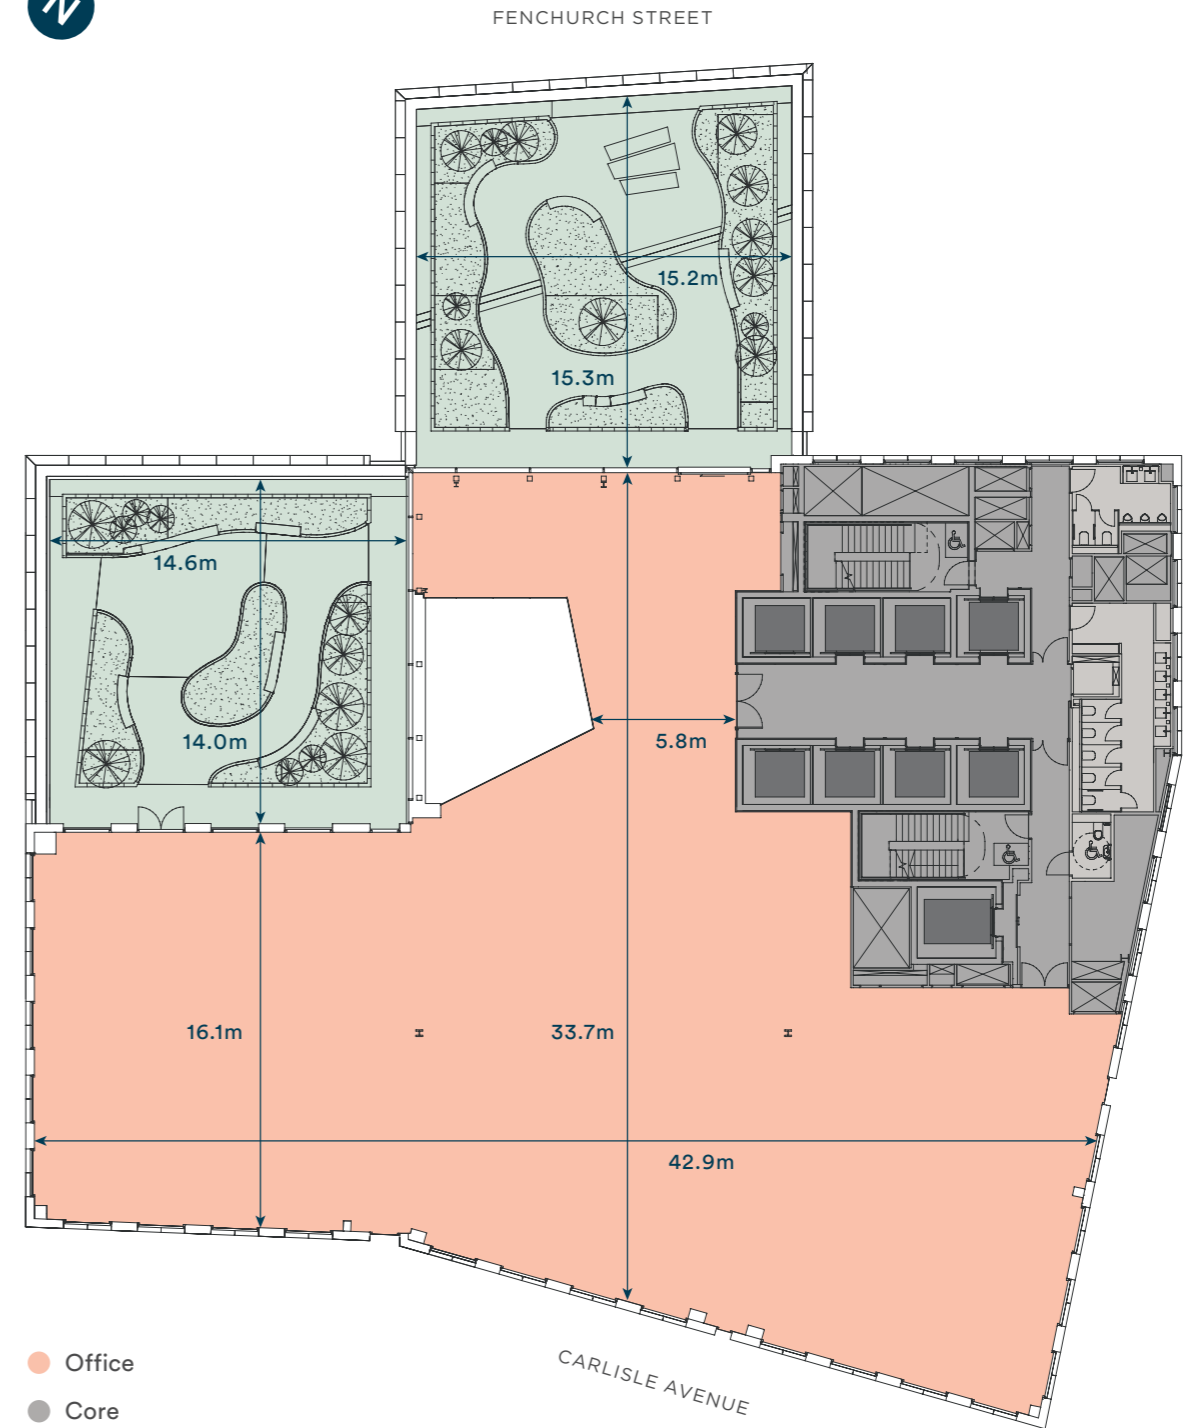

- Office
- Core
- Lifts
- WCs
- Terraces

Plans not to scale. For identification purposes only.



Thirteenth floor

7,125 sq ft / 662 sq m Terrace: 2,232 sq ft




- Office
- Core
- Lifts
- WCs
- Terrace

Plans not to scale. For identification purposes only.

Fourteenth floor

5,532 sq ft / 514 sq m Terrace: 993 sq ft

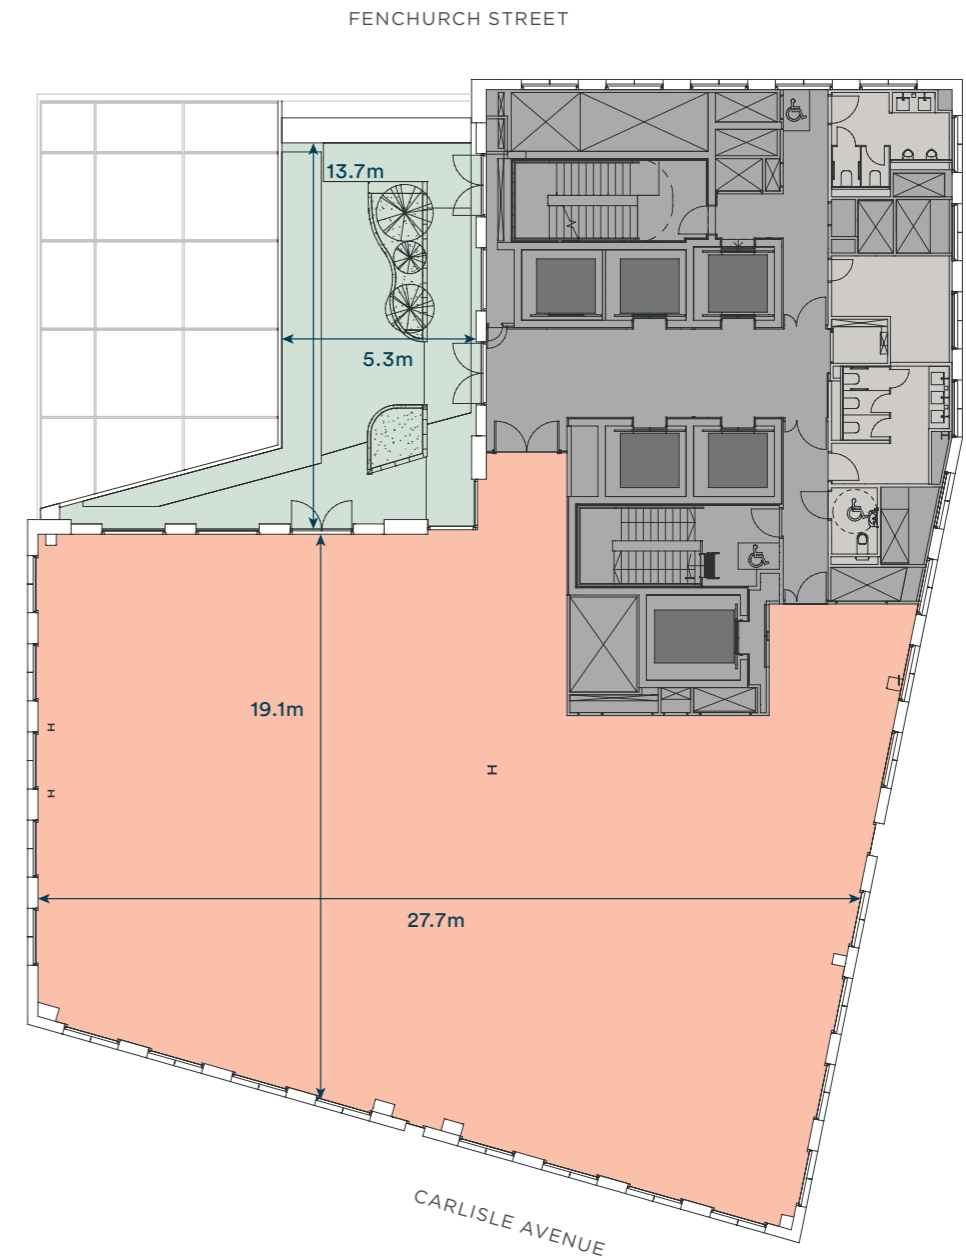

- Office
- Core
- Lifts
- WCs
- Terrace

Plans not to scale. For identification purposes only.







Fourth floor

20,592 sq ft / 1,913 sq m




CORPORATE


OCCUPANCY KEY

Open Plan Workstations	156
Agile Work Settings	50
Offices (1 Person Per Office)	3
Total Workstations	209
Occupancy Ratio	1:9 sq m

Meeting Room (4 Person)	2
Meeting Room (6 Person)	3
Meeting Room (8-20 Person)	6
Total	11

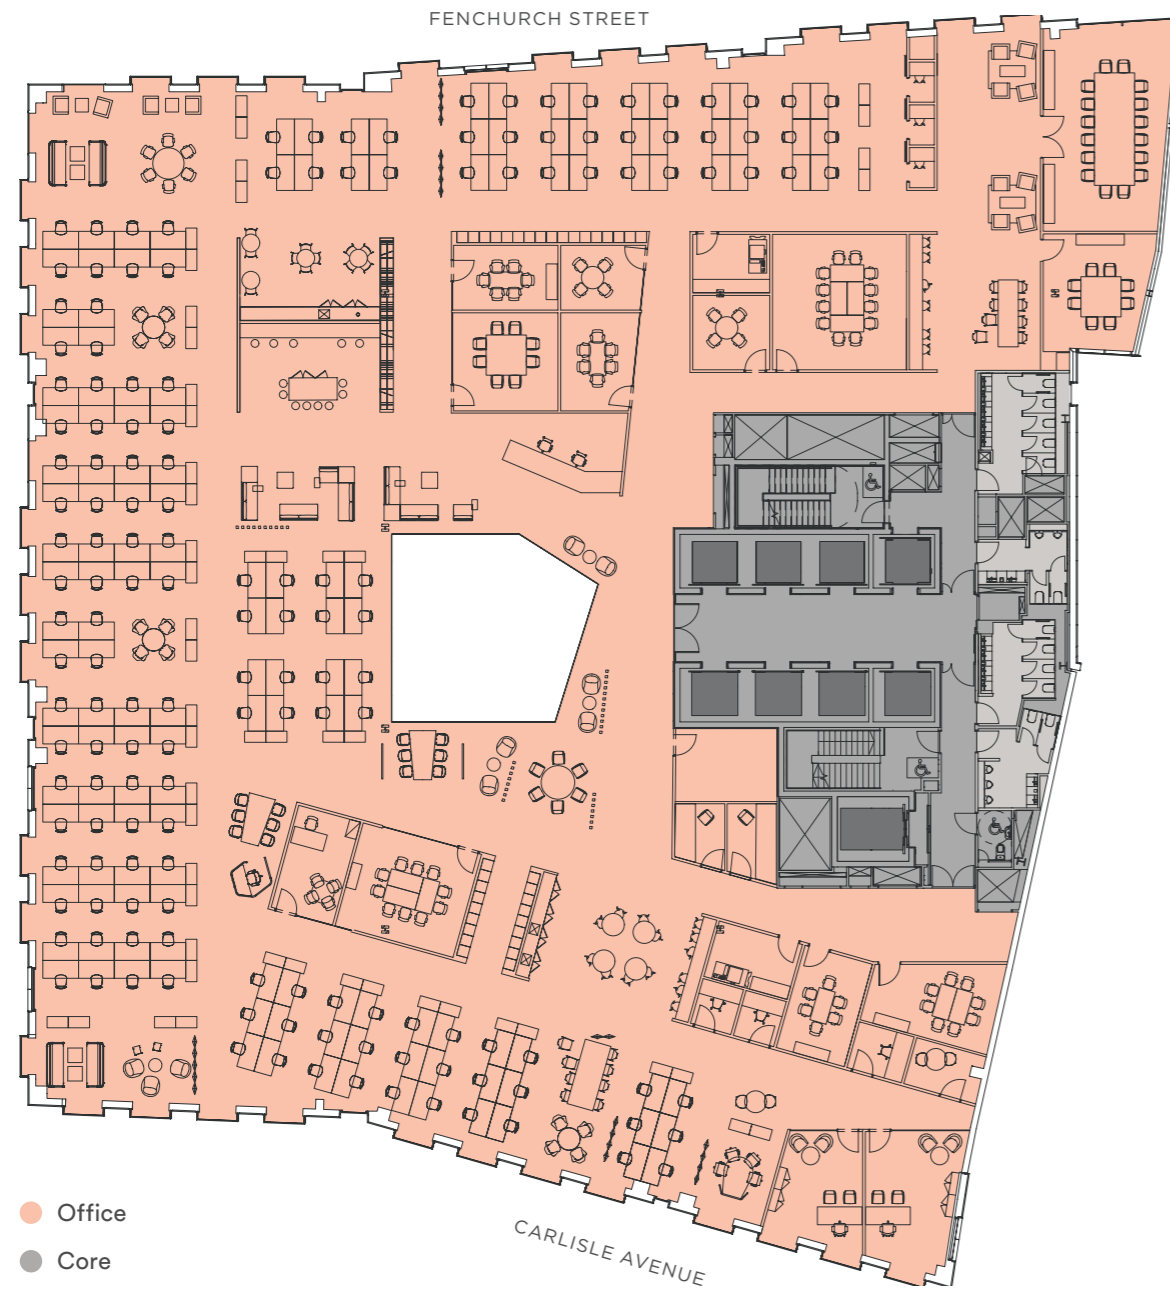

Plans not to scale. For identification purposes only.

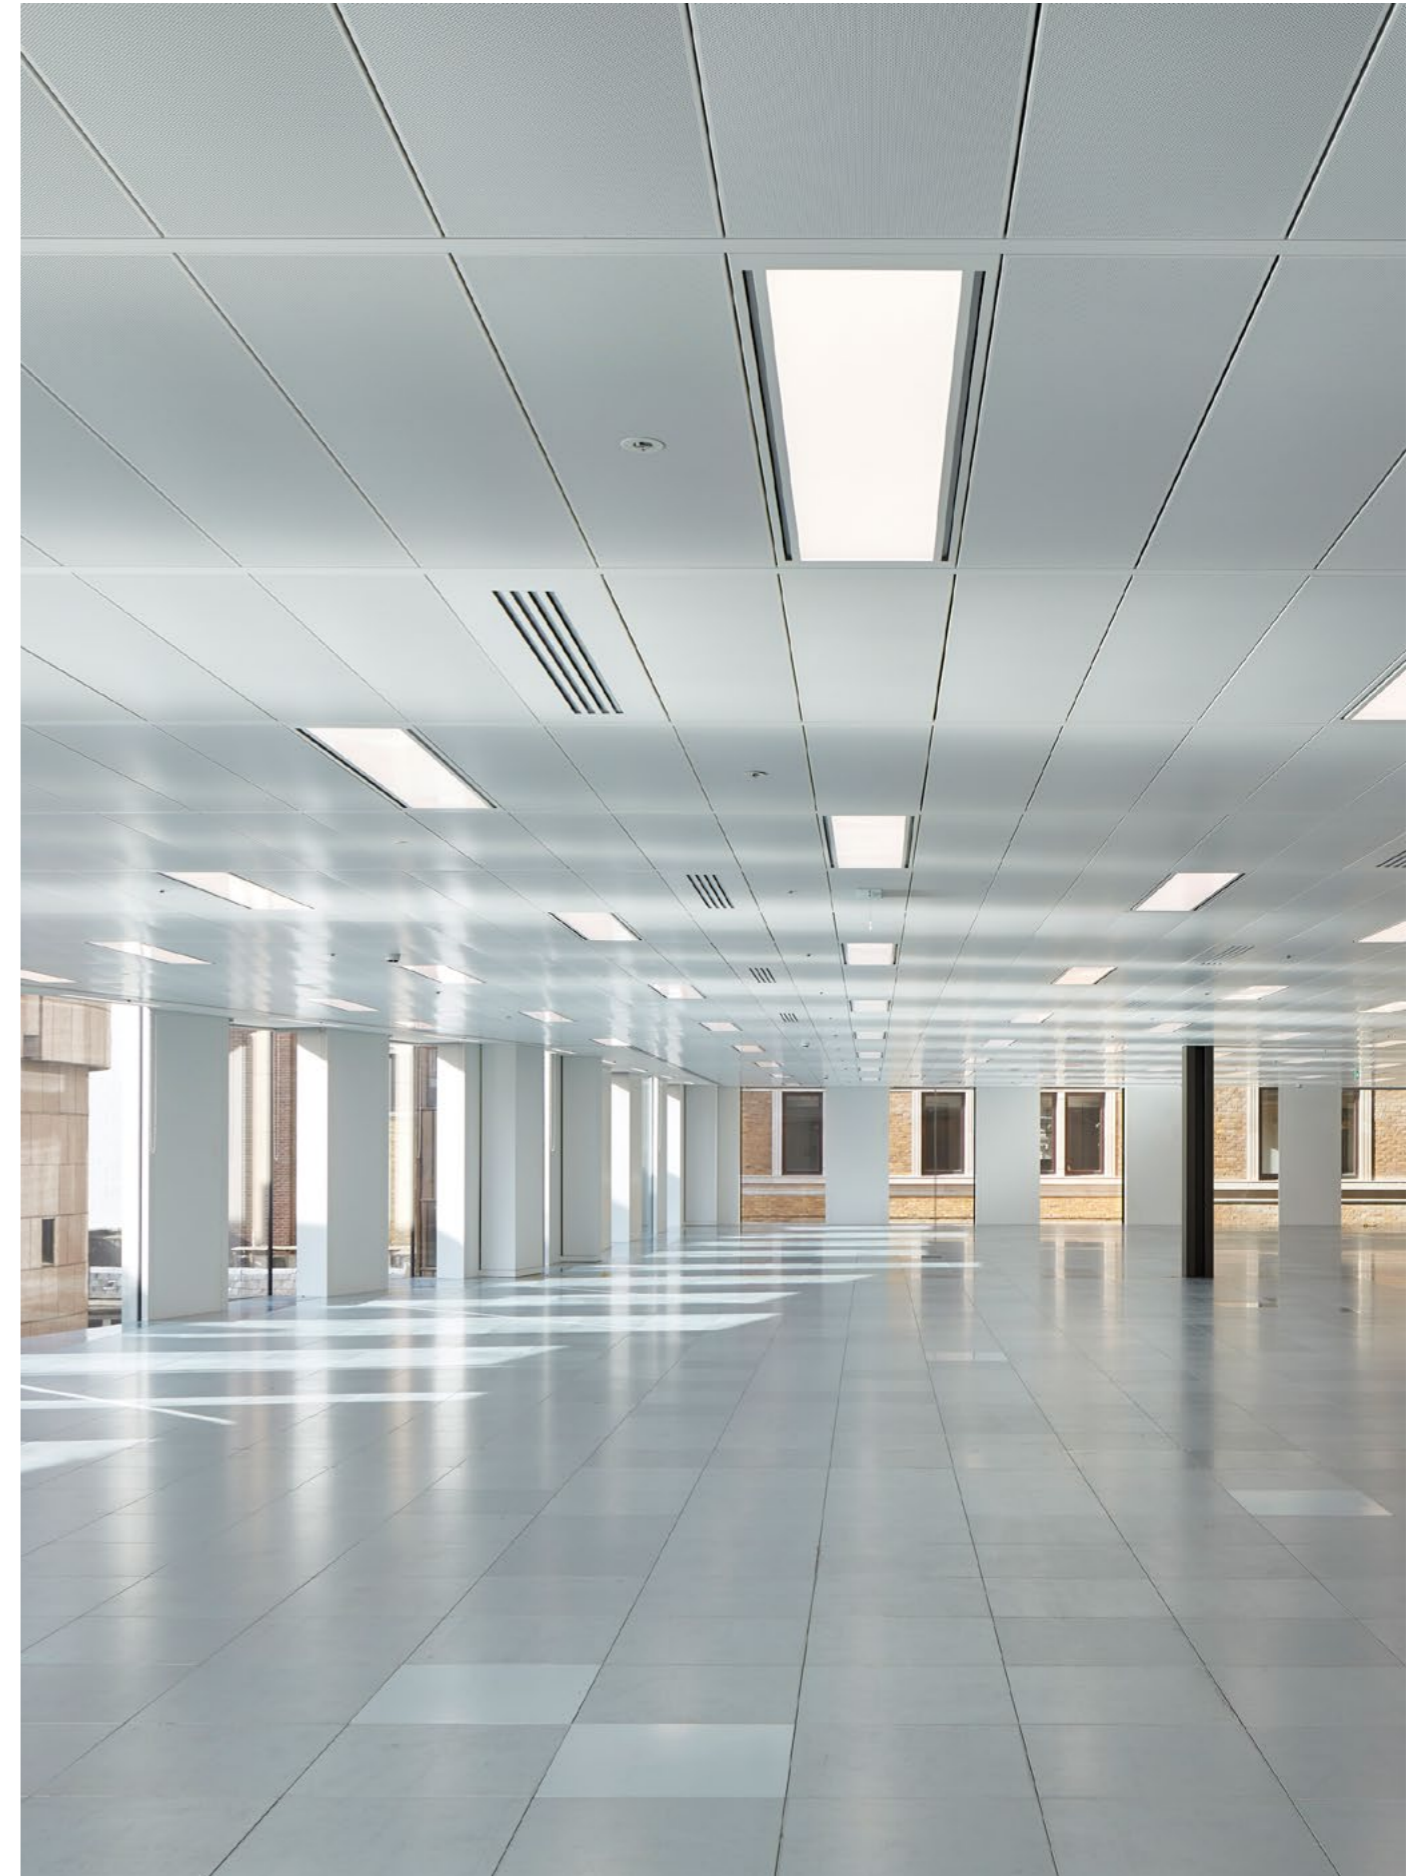



Eighth floor

19,763 sq ft / 1,836 sq m



CREATIVE ACTIVITY BASED

OCCUPANCY KEY	
Open Plan Workstations	124
Agile Work Settings	105
Total Workstations	229
Occupancy Ratio	1:8 sq m
Meeting Room (4 Person)	4
Meeting Room (8-20 Person)	8
Total	12



- Office
- Core
- Lifts
- WCs
- Terrace

Tenth floor

17,490 sq ft / 1,625 sq m
Terrace: 2,063 sq ft



BOUTIQUE FINTECH

OCCUPANCY KEY	
Open Plan Workstations	122
Agile Work Settings	75
Offices (1 Person Per Office)	1
Total Workstations	198
Occupancy Ratio	1:8 sq m
Meeting Room (4 Person)	2
Meeting Room (6 Person)	4
Meeting Room (8-20 Person)	2
Meeting Room (20+ Person)	1
Total	9



- Office
- Core
- Lifts
- WCs
- Terrace

Plans not to scale. For identification purposes only.



Designed with you in mind.

New best in class office development with contemporary finishes:



Statement entrance and arrival experience



Communal amenity space



Six expansive landscaped terraces with panoramic views



BREEAM Excellent



WiredScore Platinum



Smart tech enabled



22 showers



331 cycle racks and 342 lockers



Healthy workspace



Efficient and flexible floor plates



UV filtrated air-conditioning



Occupational density of 1:6-1:8m²



EightyFen / End of Journey Facilities





Eighty/Fen / End of Journey Facilities





Building Specification

Category A Definition

The office units are finished to Category A standard.

Category A standard finish comprises:

- Raised floors and skirtings
- Suspended ceilings and integrated mechanical and electrical services
- Extension of the mechanical and electrical services above the ceiling and below floors from the riser across the lettable space including cooling and heating systems, office ventilation and life safety systems such as fire alarms, sprinklers and emergency lighting
- Open plan base lighting solution
- Distribution boards
- Statutory signage for means of escape
- Security access control system at entry points from core to office areas and wireways elsewhere
- Decorative finishes to the internal face of the external and core walls
- Decorative cladding to encapsulate internal columns

The Building

Sustainability

BREEAM 2014 New construction: Excellent rating achieved. The building has an EPC B rating.

WELL Building Standard

The Stage 4 design incorporates elements of the WELL Building Standard V1 Core and Shell.

Summary of Performance Criteria and Key Dimensions

Key Dimensions

Top of raised floor to underside of ceiling — office areas:

- 2,700mm on ground floor
- 2,950mm on 1st floor
- 3,000mm on 2nd floor
- 2,750mm on 3rd to 11th floors
- 2,700mm on 12th to 14th floors

Total raised floor zone:

- 150mm on typical floors (130mm minimum)
- 300mm on 1st and 2nd floors (280mm minimum)

Structural Loadings

Office floors: 3.5kN/m² (live loads) + 1.0kN/m² (partitions) = 4.5kN/m²
5% of floor area at 7.5kN/m²

Staircases: 4.0kN/m²

Roof (access for maintenance): 1.2kN/m²

Plant areas: 7.5kN/m²

Basement (incl. plant areas): 7.5-50.0kN/m²

Loading bay: 15.0kN/m²

Retail spaces (ground floor): 8.0kN/m²

Retail spaces (lower ground floor): 4.5kN/m²

Roof terraces: 4.0kN/m²

Reception: 4.0kN/m²

Bridge: 3.5kN/m²

Parking Provision

Disabled car parking bays: Two including electric vehicle charging point

End of Journey Amenities

Cycle Racks: 286 cycle racks plus 45 folding cycle lockers (331 total)

Cyclist showers and toilets: 22 showers including 2 accessible shower and toilet cubicles; 2 male and 2 female toilet cubicles

Lockers: 342

Drying rooms: 2 male and 1 female

Temperatures

External

Summer: 29°C db (20°C wb)

Winter: -4°C saturated

Internal

Office

Winter (mean): 20°C ± 2°C

Uncontrolled % RH

Summer (mean): 24°C ± 2°C

Uncontrolled % RH

Lobbies and reception

Winter (mean): 20°C ± 2°C

Uncontrolled % RH

Summer (mean): 24°C ± 2°C

Uncontrolled % RH

Electrical Services

Office lighting demand: 6W/m²

Office small power: 25W/m²

Office diversified small power: 25W/m² plus 15W/m² over 25% of the NIA

Office fan coils: 6W/m² on floor and in vertical risers

1st and 2nd floors: 150Watts/m²

Landlord's life safety: 400kVA prime rated generators

Tenant generator: Location provided for install by occupier

Lighting Levels


Offices:

- 500 lux average at working plane
- 0.7 uniformity

- Unified Glare Rating (UGR) ≤19

Lift lobbies: 200 lux

Toilets: 200 lux

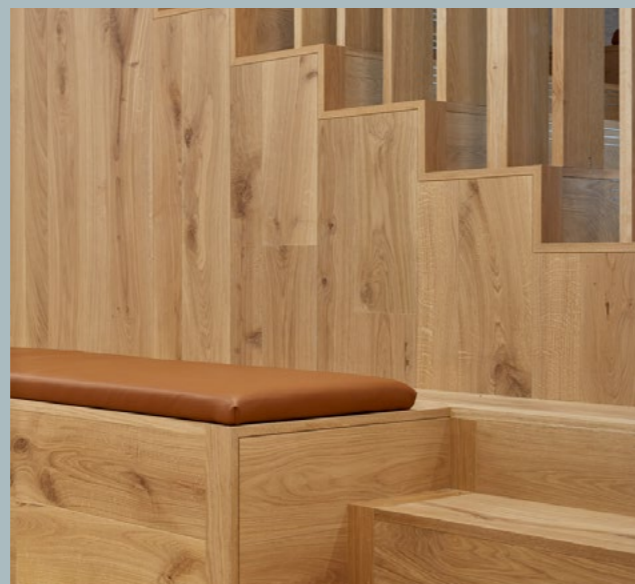

Building Specification

Lift Performance

Population: 1 person/8m² throughout 80% utilisation

Traffic: 85% up, 10% down and 5% inter-floor. Average Waiting Time (AWT) ≤ 25 seconds — Across all floors

Average time to destination: ≤ 90 seconds — for all journeys. AWT can increase to 30 seconds so long as ATTD is ≤ 80 seconds

Goods lift: Dedicated 2,500kg load

Fire-fighting lift: As required by fire strategy

Bicycle lift: Dedicated 18 person/1,350kg load

Future Tenant Provision

Tenant kitchen ventilation risers: Tenant kitchen possible on the top floor

Tenant CER cooling plant: MER and SER. Space provision for tenant 24hr heat rejection plant

Occupancy

Office occupancy:

- 8m²/Person generally
- 6m²/Person on 1st and 2nd floor levels
- 8m²/Person for lift provision to all office areas on ground to 14th floor level inclusive

Office fresh air:

- 8m²/Person generally at 12l/s/person
- 6m²/Person on 1st and 2nd floor levels at 12l/s/person

Office means of escape:

- 6m²/Person

Sanitary accommodation:

- 8m²/Person (60:60 M/F split)

Office disabled toilets: Included in above with unisex cubicles provided

Ground floor entrance toilets:

- 1 accessible cubicle

Cat A Office Areas

Floors

Raised access floor PSA MOB medium grade to provide an overall zone of 150mm on typical floor levels and 300mm on 1st and 2nd floor levels using 600 x 600mm fully encapsulated panels on an adjustable steel pedestal system.

Floor finishes by tenant.

Ceilings

SAS system 330 metal pan ceiling in suspended grid with perforated tiles. Perforation pattern: D1820

Ceiling module:

Generally: 1500mm x 375mm including 40mm wide C profile suspension channel.

Enhanced occupancy floors: 2143mm x 375mm including 300mm wide C profile suspension channel.

Flush mounted modular LED light fittings set into 1460mm x 375mm tiles generally and 1843mm x 375mm on enhanced occupancy floor levels.

Plasterboard margins to office perimeter incorporating blind box recess and fixing.

Building Services

Incoming Electrical Power Supplies

The new electrical supply is taken at 11,000 Volts from the UKPN network and is rated at 3.5MVA via two 1.75MVA supplies, terminating within ring main units located within UKPN HV Network Substation located at lower ground level.

The UKPN Substation also houses a UKPN Network transformer, which is independent of the main building supply.

Under normal circumstances, the building demand will be shared between the two power supply connections. However each connection is capable of supplying the full 3.5MVA capacity in the event that the other fails.

The electrical services distribution will be arranged to allow for either single floor, multiple floor by floor or two tenancies per floor. Separate metering shall be provided for tenant's and landlord's services, monitored by the BMS.

Separate metering shall be incorporated to enable individual meter readings for both lighting and power loads.

Central Cooling Plant

The refrigeration plant comprises four high efficiency air cooled chillers at roof level with circulating water pumps positioned in the basement plant room together with pressure control and system filtration sets.

Office Air Conditioning

The offices are air conditioned by means of a four pipe fan coil system. Fan coil units have EC/DC motor type/variable speed control.

Conditioned air is supplied to the office spaces by means of a four pipe fan coil system. Each fan coil unit is complete with cooling coil, heating coil, filter, fresh air inlet connection, fan section and supplies air via a ducted plenum and linear slot type diffusers to suit the planning grid.

8m²
office occupancy
per person

22
showers

331
cycle racks

Fire Protection Services

Sprinkler System: The commercial sprinkler system is designed to comply with BSEN 12845:2009 + A2 technical bulletins with a hazard classification of OH3. The system serves the loading bay, car park, offices plant areas and retail units.

Stand-By Power Systems

A 1,250 kVA tenant generator is provided. This is located at roof level.

The landlord 400 kVA life safety generator located at basement B2 level, shall automatically start upon sensing of mains failure at any ATS.

The life safety loads and essential loads are connected to the main supply via LV switchboards LV-1 and 2 and to the Standby Generator via LV switchboard LS-1 and a system of automatic transfer switches (ATS's). Priority is given to life safety loads under mains failure conditions with other building loads being supplied in a sequential manner.

Fire Alarm and Detection Systems

A dedicated fire alarm installation has been supplied, installed, tested and commissioned in full accordance with the Building Fire Strategy and BS 5839 and EN 54-23.

Telecommunications

A comprehensive landlord telephone network is provided and provides connectivity to all landlord IT equipment, such as workstations, printers and telephones.

Security

The security systems are comprised of the following:

- Security Management System for monitoring, controlling and responding to security alarms.
- CCTV monitoring of internal and external landlord areas including lifts, stair cores, cycle stores and reception areas.
- Electronic access control system for landlord areas.
- Interface of electronic access control system to turnstiles and the lift destination control system.
- Door monitoring system for doors exiting the building.
- Intercoms at external doors for building users arriving out of hours.
- Panic alarm buttons located at security locations, which on activation secure routes into tenant areas.

Vertical Transport Provision

Passenger lifts A to H
Lift size/weight: 24 person/1,800kg
Speed: 2.5 m/s

Goods lift GL1
Serving basement level 2 to 14th floor level inclusive

Lift size/weight: 2,500kg
Speed: 2.0 m/s

Fire-fighting lift D
Dual use fire-fighting Part B fire-fighting lift serving basement level 2 to 14th floor level inclusive

Lift size/weight: 24 person/1,800kg
Speed: 2.5 m/s

Bicycle lift BL1
Serving lower ground to basement level 1

Lift size/weight: 18 person/1,350kg
Speed: 1.0 m/s



DEVELOPER

YardNine

CONTRACTOR

SKANSKA

ARCHITECT

tp bennett

LANDSCAPE ARCHITECT

H | E | D

PROJECT MANAGER

**AVISON
YOUNG**

PLANNING



GERALDEVE

QUANTITY SURVEYOR

**GT GARDINER
& THEOBALD**

SERVICES ENGINEER

H | M

STRUCTURAL ENGINEER

Pell Frischmann
Excellence through innovation

DISCLAIMER: All areas are approximate, measured in accordance with RICS Code of measuring practice 6th edition. The building may present anomalies in relation to survey/drawn plans. CGIs are for illustrative purposes only. This information must not be relied upon to form the basis of any offer or contract. JLL and Knight Frank on their behalf and for the Vendors or Lessors of this property whose Agents they are, give notice that: 1. These particulars are set out as a general outline only for guidance to intending Purchasers or Lessees, and do not constitute any part of an offer or contract. 2. Details are given without any responsibility and any intending Purchasers, Lessees or Third Parties should not rely on them as statements or representations of fact, but must satisfy themselves by inspection or otherwise as to the correctness of each of them. 3. No person in the employment of JLL and Knight Frank has any authority to make any representation or warranty whatsoever in relation to this property. Subject to contract. January 2021.

Designed by Stepladder. stepladderuk.com

